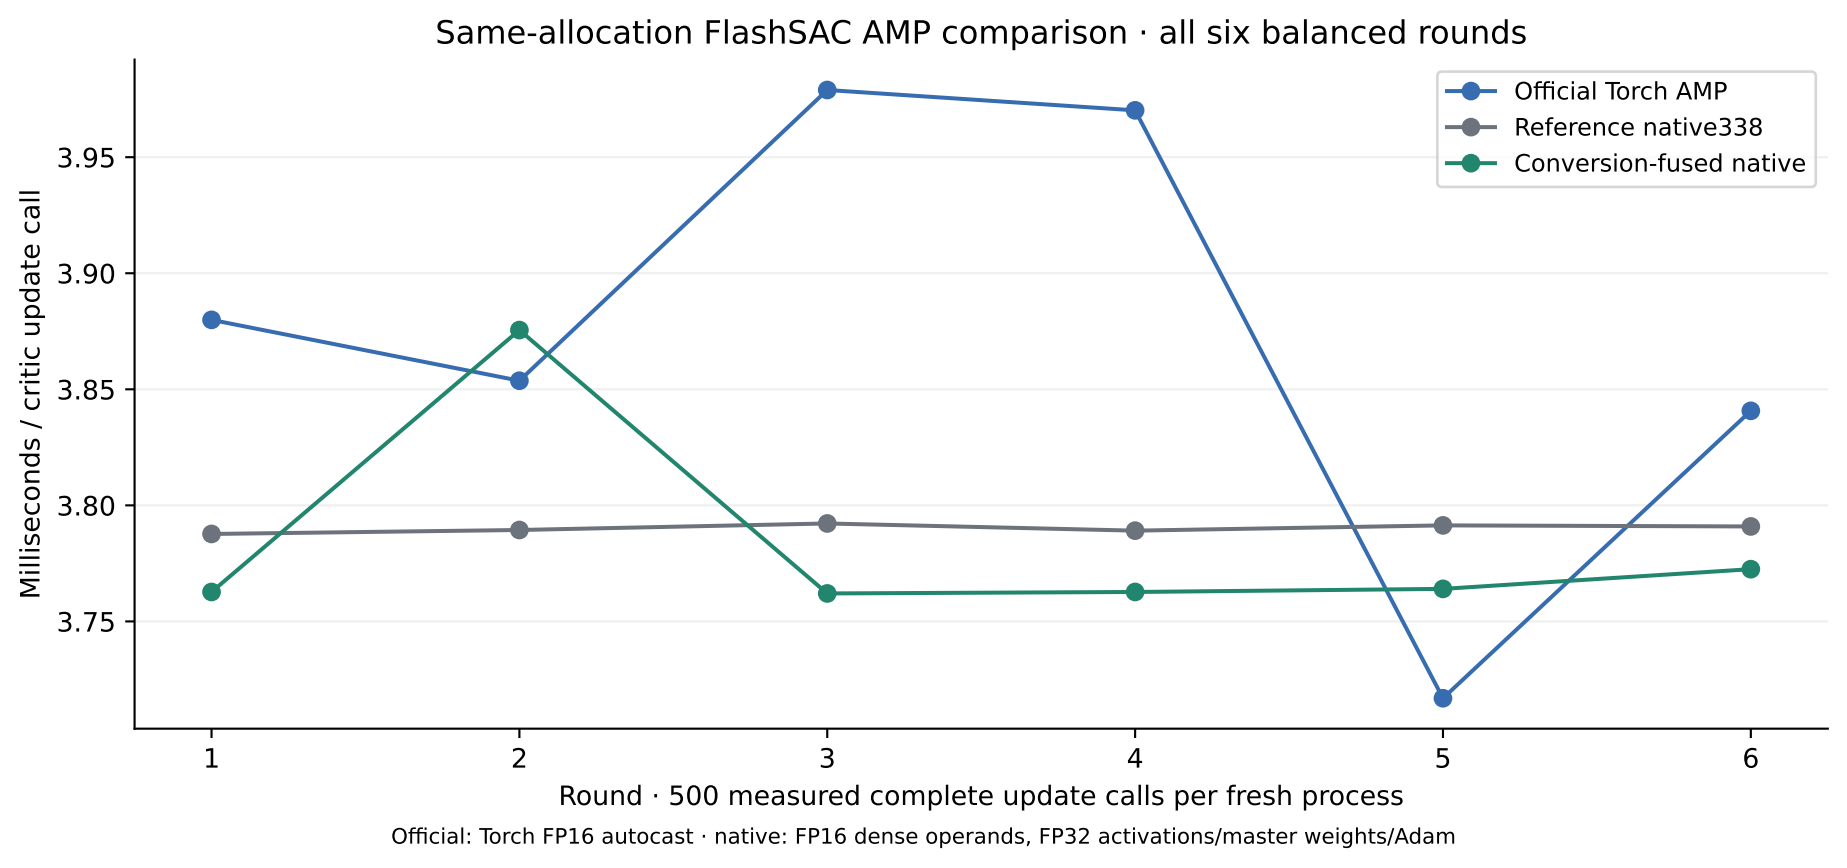
Same-allocation FlashSAC AMP comparison · all six balanced rounds
Official Torch AMP
Reference native338
Conversion-fused native
Milliseconds / critic update call
3.95
3.90
3.85
3.80
3.75
1
2
3
4
5
6
Round · 500 measured complete update calls per fresh process
Official: Torch FP16 autocast · native: FP16 dense operands, FP32 activations/master weights/Adam