


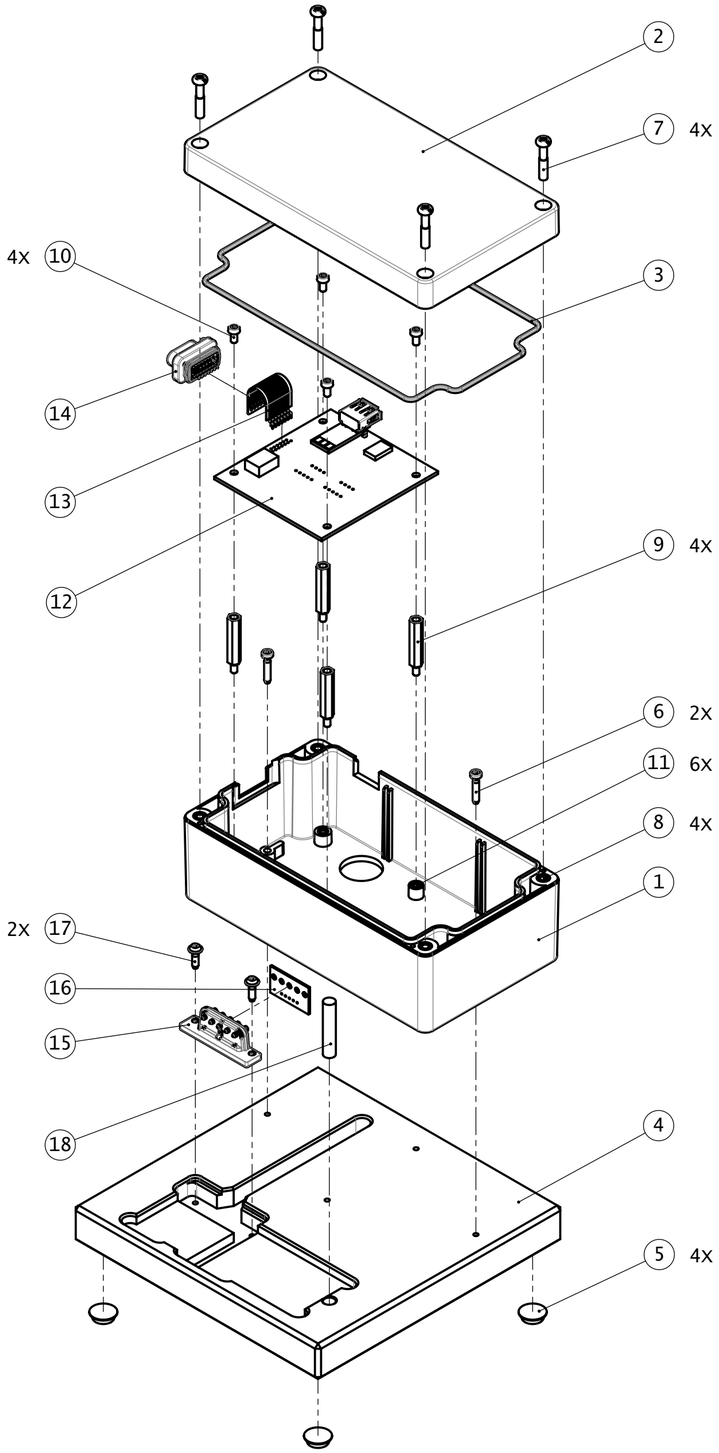


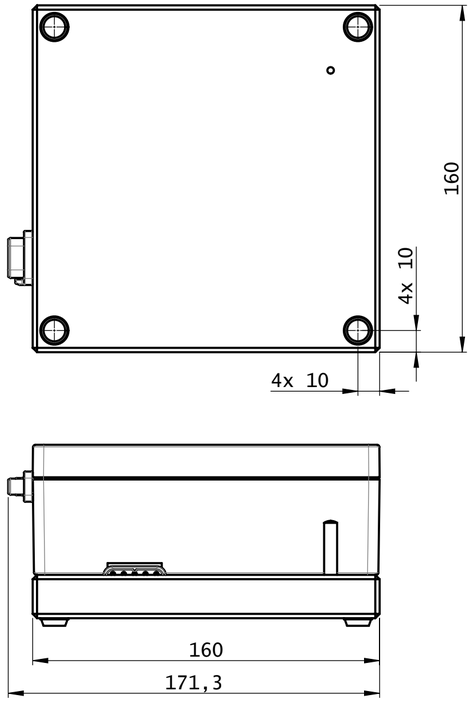


SECTION A- A

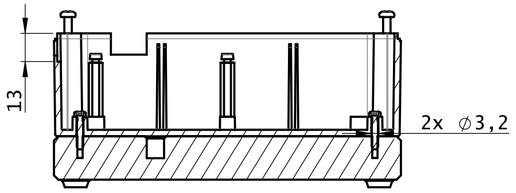


DETAIL Z (1 : 1)





Without STECKVERB.BUCHSE 13POL.

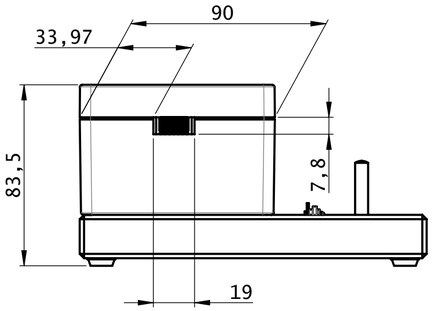

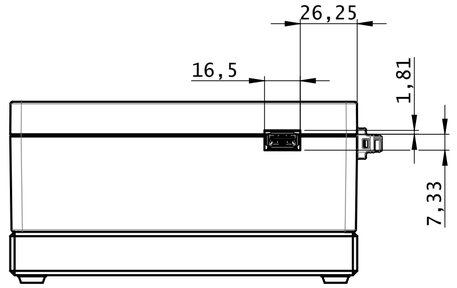

Without housing lid, housing gasket, Steckverb.buchse, Polyflex strip and PCB

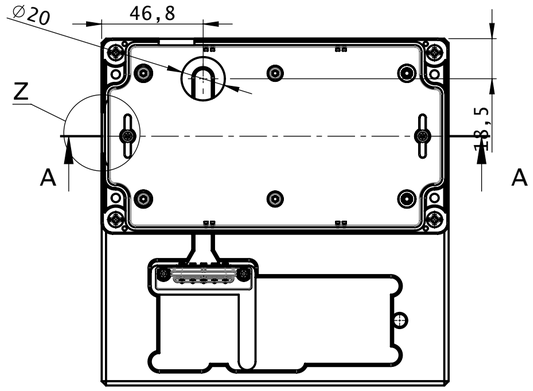

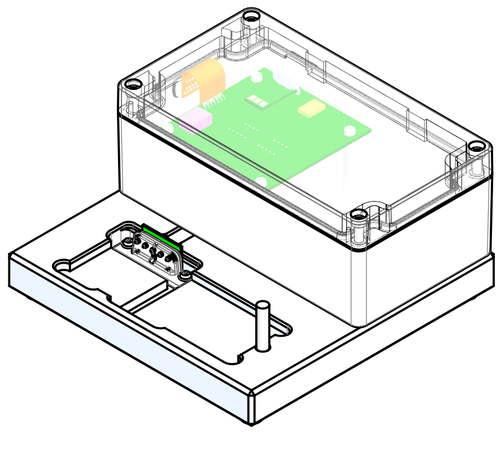

Drawing for sampling pilot series
Zeichnung für Bemusterung Nullserie
I24-52 Rev.A
10/7/2024
Signature/Unterschrift: SCHU03DE

Pos.	Menge	Benennung	Art.Nr.	Zeichnungsnummer oder SAP-Nr.	SAP Version	Bemerkungen
18	1	Zylinderstift 6x30 DIN 6325	-	10022459	01	
17	2	Schraube 30x10 WN5451 A2 Torx	TBD	10009834	01	
16	1	LP-Akkustecker Perf. / Inf. Space	33216185	I0688401201	01	
15	1	Battery contact strip 5-pole CN032-005	33085528	10035948	01	
14	1	STECKVERB.BUCHSE 13POL.MSC B-K1-B-VR	33085170	33085170	01	
13	1	Polyflex strip 13-pole Space	33010216	10035952	01	
12	1	PCB NiMH Akku update tool	-	10035949	01	
11	6	Threaded insert M3	-	10035950	01	
10	4	ZYLINDERSCHRAUBE M3X6 TORX	39503879	10003164	01	
9	4	Spacer M3x25 internal/external thread	-	10035951	01	
8	4	Threaded insert M4	-	10035944	01	
7	4	Cross-head screw M4x20	-	10035945	01	
6	2	Delta PT SCHRAUBE A2 WN 5452 30x16 TORX	39503976	10003205	01	
5	4	Gerätefuß Ø 12,7 x 3,5	-	10022460	01	
4	1	Li-Ion Akku update tool baseplate	-	I0027600001	01	NiMH Akku update tool baseplate
3	1	NiMH Akku update tool housing gasket	-	10035943	01	
2	1	NiMH Akku update tool housing lid	-	10035947	01	
1	1	NiMH Akku update tool housingbase	-	10035946	01	

Quality Characteristics

Entry of simplified identifier specifications Basic symbol "general distinguishing mark". • In connection with a pointer to the relevant geometric element. • In connection with a drawing specification.		This identification of the specific properties will be used exclusively for inspection points and need to be check during the production.
This identification of the specific properties will be used exclusively for capability studies and need to be check during the production. Cm/Cmk ≥ 1,67, Pp/Ppk ≥ 1,67, Cp/Cpk ≥ 1,33.	SPC	This identification of the specific properties will be used exclusively for capability studies and need to be check during the production. Cm/Cmk ≥ 2,00, Pp/Ppk ≥ 2,00, Cp/Cpk ≥ 1,67.

Dimensions in accordance with FMEA (internal information B.BRAUN)

Associated documents : -
Quality Requirement (QR) : -
Risk class : Auxiliary
Incoming Test Plan (ITP) : -

on approval

Tolerances according to ISO 2768-MK
Material: -
Page: 1/1
Weight: -
ISO 128
Dimension in mm
All rights reserved DIN ISO 16016
Art.-No.: -
Size: A2
Scale: 1:2

	Date	Name
Drawn	2024-10-07	SCHU03DE
Checked		
Norm	-	-

NiMH Akku update tool

B|BRAUN

I0027610000

Doc. Type SWD
Doc. Part 000
Status 15
Version 01

Rev	Change-No.	Date	Name
Original -			
Repl.f. -			
Repl.b. -			

I0027610000_SWD_000_01.1d15v SCHU03DE I0027610000 20241007 1.000