

Characterizing a Cold Gas Thruster System

Max Huggins – UCA Department of Physics and Astronomy

April 11, 2020

Abstract

A cold gas thruster (CGT) system was designed with pre-existing nozzle theory in mind. This paper deals with characterizing the system and provides an analysis of the force production for it. It was found that the CGT performed similarly to the predicted theory, but the data collected was not sufficient to characterize the system as was previously expected. This required the use of a more general analysis scheme.

1 Introduction

A cold gas thruster (CGT) is a system that uses expanding gas to generate a force. This force is typically used in reaction control systems (RCSs) to stabilize space craft or simply change their attitude. This paper is primarily concerned with reaction control systems to be developed for high altitude balloon payloads (HABPs.) These HABPs experience intense and sporadic winds. Winds which make data collection for certain sensors difficult. There are several ways in which a RCS can achieve stabilization, but the method of choice here is the CGT.

There are several components important to the CGT RCS. Here, there will only be a brief discussion on two of these components such that the analysis is not lacking information.

The first consideration to make is the type of gas to be used. The primary question here is, *what makes one gas better than another?* One parameter that tries to answer this question is the *specific impulse* (I_{sp}). This is a value specific to a gas. Experimentally, it is measured by integrating a force (F) versus time (t) plot generated by a CGT using that gas. That will give the total impulse, this is divided by the change in weight of the gas through that time period (τ). In other words:

$$I_{sp} = \frac{\sum_{t=0}^{\tau} F(t)t}{\Delta mg} \quad (1)$$

where Δm is mass and g is acceleration due to gravity. More precisely, specific impulse is defined by equation 2.

$$I_{sp} = \frac{F}{dm/dt} \quad (2)$$

You may notice the discrepancy in units between equations 1 and 2. Often times the I_{sp} is given with units of s, but in reality it is defined with units of Ns/kg .

This is an excellent start to creating a standard for comparing gases, but there is much more that should be considered. Factors such as safety, availability, cost, energy storage density, and so on all contribute to the choice of gas. Additionally, each one of these factors has a different weight per say depending on the scenario in which they are being applied. After consideration, the choice of gas for this system is CO_2 .

The other component is the nozzle. These are used to set the mass flow rate for the system and to accelerate the propellant to supersonic speeds. They consist of a converging section that leads into a throat of minimum radius and a diverging section. Nozzles that have been made to achieve maximum thrust obey the following characteristics. In the converging section, the gas is accelerated; once the throat is reached the gas is traveling at the speed of sound. Then, as it proceeds into the diverging section, it continues to accelerate until it reaches the exit plane of the nozzle. Ideally, the nozzle is designed such that the pressure of the gas exiting the nozzle is equal to the ambient pressure.

The thrust produced by a nozzle can be written in terms of the variables listed below. First, though, it is given by equation 3 in reference [1].

- Chamber Temperature (T_c)
- Exit Temperature (T_e)
- Chamber Pressure (P_c)
- Exit Area of Nozzle (A_e)
- Throat Area of Nozzle (A_t)

The derivation will not be shown here, but reference [1] discusses it in detail. The text derives equation 3 from the laws of thermodynamics and some general assumptions.

$$C_F = \sqrt{\frac{2\gamma^2}{\gamma-1} \left(\frac{2}{\gamma+1}\right)^{\frac{\gamma+1}{\gamma-1}} \left(1 - \left(\frac{P_e}{P_c}\right)^{\frac{\gamma-1}{\gamma}}\right) + \frac{(P_e - P_a) A_e}{P_c A_t}} \quad (3)$$

Where C_F is defined by:

$$C_F = \frac{F}{A_t P_c} \quad (4)$$

It is also helpful to define the nozzle's expansion ratio (ϵ), given by equation 5.

$$\epsilon = \frac{A_e}{A_t} \quad (5)$$

It can be seen C_F , ergo the thrust, is at maximum when $P_a = P_e = 0$. It is also shown that $\frac{P_e}{P_c}$ is given by equation 6.

$$\frac{P_e}{P_c} = \left(1 + \frac{(\gamma-1)}{2} M^2\right)^{\frac{\gamma}{\gamma-1}} \quad (6)$$

Additionally, we can define the mach number as:

$$M^2 = \frac{2}{\gamma-1} \left(\frac{T_c}{T_e} - 1\right) \quad (7)$$

allowing us to make a substitution for $\frac{P_e}{P_c}$ into equation 3. With this substitution, we will eliminate P_e . The motivation for this is that measuring the exit plane pressure is more difficult than measuring the exit plane temperature. After the substitutions, we retrieve equation 8.

$$F = A_t P_c \left(\sqrt{\frac{2\gamma^2}{\gamma-1} \left(\frac{2}{\gamma+1} \right)^{\frac{\gamma+1}{\gamma-1}} \left(1 - \frac{T_e}{T_c} \right)} + \left(\left(\frac{T_e}{T_c} \right)^{\frac{\gamma}{\gamma-1}} - \frac{P_a}{P_c} \right) \epsilon \right) \quad (8)$$

This equation was developed given some assumptions and in different systems some of the assumptions may have a more or less dominant effect. It can also be seen that since the thrust is highly dependent on the external pressure, the nozzle should be designed to maximize the thrust in the pressure it will spend the most time in. Because of this an experiment was developed to determine the reliability of equation 8.

In measuring the thrust at several different area ratios and comparing it to the predicted thrust, the hope is to create an "effective" proportionality constant. This would then allow the nozzle design process to be maximized for pressures that cannot be tested on Earth's surface.

2 Data Collection and Analysis

2.1 Data Collection

The data taken was for the variables in equation 8. There were a total of 10 nozzle expansion ratios used with 2 trials each. The expansion ratio kept A_t constant and varied A_e . There were 4 over expanded, 4 underexpanded, 1 optimum, and 1 with no expansion. The naming scheme goes something like ERT, where E stands for either U (Underexpanded), N (None), or O. O stands for either optimum or overexpanded. R is the ratio number (1-4) except in the case that there is no third character. In this case the O stands for optimum, which there is only one of. T stands for trial number which can be either 1 or 2. So for example, U22 is underexpanded, ratio number 2, trial number 2. O1 is optimum ratio, trial number 1. These are explicitly defined in the nomenclature section 4. This naming scheme will be upated in future experiments because it was slightly problematic in the analysis of the data.

Data Sensors

There should be some light discussion on the sensors used for data collection. There was a single pressure transducer located near the inlet of the nozzle, a thermocouple located on the nozzle, a thermocouple located inside of the adaptor that the CO_2 connected to the rest of the plumbing, and a load cell setup to measure the thrust produced from the CGT. For sake of simplicity I will refer to these as "sensors" preceeded by the variable they measured. So, respectively, P_c sensor, T_e sensor, T_c sensor, and F sensor. Additionally, γ is dependent on temperature, but only changes slightly in the temperature differences noticed here. In later models, γ will be set to be a function of temperature for greater accuracy. For now it is not necessary because the force has a small dependence on γ compared to the temperature. So, for the sake of this project

γ is a constant. The data acquisition system was running python on a RaspberryPi 3 and since all of these sensors are analog devices 2 different analog-to-digital converters (ADCs) was used to interface with the Pi. The P_c , T_e , and T_c sensors interfaced with a 10-bit ADC and the F sensor interfaced with a 24-bit ADC. In future experiments, a 24-bit ADC will be used for all data acquisition because of the limited resolution with the 10-bit ADC. This is especially evident with the thermocouple data. All of the python scripts for data collection are available at my [GitHub repository](#).

The code began the experiment after all sensors were calibrated and functioning properly. Data collection ran until the force production was below a certain threshold for a predefined number of points. This would also need to be updated because often times the force sensor would lose its zero position so defining the threshold value was not so easy. A better method would be using the change in force to determine when the experiment was over. This would work well because the force is transient until the CO_2 was all spent. After it was over the mass of the CO_2 canister was measured. All of this data was written to two seperate .txt files. One included the calibration values for the sensors and changes in mass, the other included P_c , T_c , T_e , and F . The previous was not recorded in a useful format and later work had to be done to resolve this. In the future this should be updated. The latter was simply comma delimited and worked fine for reading into python for analysis. The data files can be found at my [GitHub repository](#) as well.

2.2 Initial Analysis

To begin the analysis, simple plots were made to look at the sensor data over time. Immediately, it was found that the temperature data is quite poor! The resolution of the ADC is evident in the discrete steps that the temperature takes. Figure 1 shows an example of the temperature data. The limited resolution of the ADC can be seen quite clearly. However,

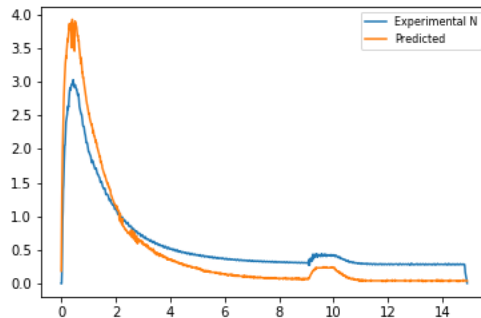


Figure 1: Example plot of the temperature over time for a trial

this is not terribly problematic and several things can be done to smooth the curve. Since smoothing this data is not the objective here, I have simply taken a function from the pandas python library that handles smoothing quite well. It uses a moving averages method. The smoothed plot is shown in figure 2. There are additional problems that come with smoothing

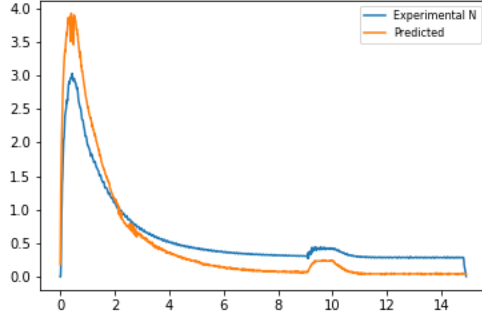


Figure 2: Example plot now smoothed

data, though. The total number of points is reduced and therefore all of the data that is going to be used must then be smoothed by the same factor. Alternatively, a function could be fit to the data and this would allow the possibility of a continuous data set. For now though, there are bigger problems with the data recorded. Figure 3 shows the two different temperature data sets plotted against time for one of the trials. It can be seen immediately

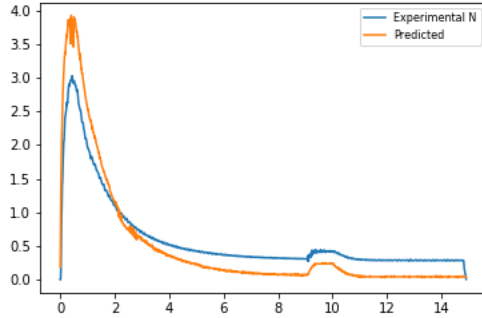


Figure 3: Smoothed T_c and T_e plotted with time

that at some point the T_c line drops below the T_e line. Looking back at equation 8 this is troublesome. This means that $\left(1 - \frac{T_e}{T_c}\right) < 0$ giving an overall negative sign under the square root. Obviously the force produced is not imaginary, so either the data collected for these temperatures is not representative of the actual variables or the theory is wrong. It is obvious that the former is the problem for several reasons. The first is that the T_c variable represents the temperature directly before the converging section of the nozzle. T_e is the temperature of the exit plane of the nozzle. The two thermocouples are not placed in these regions. Admittadely, I did not pay enough attention to these things when inspecting the theory to develop the experiment. Under normal circumstances I would make changes to the experimental setup, but since I am no longer allowed into the lab due to the global pandemic I am stuck with this data set.

Unfortunately, nothing can be done about collecting new data. Because of this we will proceed with what analysis can be completed and use a more general approach to characterizing

the CGT. First, I've plotted the predicted force with the experimental force in figure 4. As expected, we see segments where the force is undefined due to a runtime error in the numpy package. What can be done here? Well, some more consideration should be taken into the

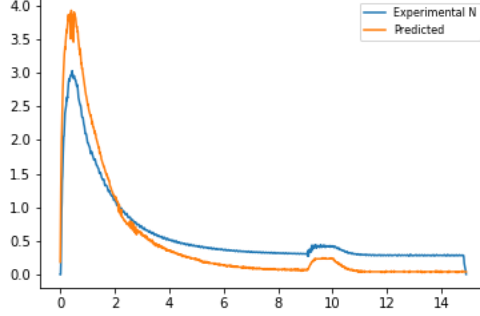


Figure 4: First attempt at plotting the thrust and predicted thrust against time

theory. Starting with a gas obeying the ideal gas law in an adiabatic system.

$$P_x V_x = nRT_x \quad (9)$$

where x is some point along the nozzle's axial direction.

$$P_x V_x^\gamma = P_{x+dx} V_{x+dx}^\gamma \quad (10)$$

after some substitution we can obtain 11.

$$\left(\frac{P_x}{P_{x+dx}} \right)^{\frac{\gamma-1}{\gamma}} = \frac{T_x}{T_{x+dx}} \quad (11)$$

now, if $P_x = P_c$ and $P_{x+dx} = P_e$, we can look at this negative sign more intuitively. We know that a nozzle will never function properly in a state where the exit plane pressure is less than the chamber pressure. Also, since the γ value is always greater than 1, the overall term will be greater than 1 which means the exit plane temperature must always be less than the chamber temperature. In other words, we know $P_c > P_e$ and $\gamma > 1$ therefore, $\left(\frac{P_c}{P_e} \right)^{\frac{\gamma-1}{\gamma}} > 1$ which also means $T_c > T_e$ always. Additionally, since gases cool as they expand, it is sensible that the chamber will be warmer than the exit plane of the nozzle.

At this point, confidence has been established in the theory and changes should be made to the experimental setup. Again, unfortunately, I'm unable to make these changes so I shall proceed however possible.

2.3 Reconciling Poor Data Collection

The most obvious way to resolve the negative sign is to include an absolute value around the problematic term. This solves the runtime error, but is unfounded. We know the optimum

nozzle expansion ratio should have the largest thrust production, but we have essentially removed the exit temperature's dependence on the expansion ratio in doing this. This means the thrust will be highest for the value which has the greatest expansion ratio which is geometry O4. This can be seen in figure 5. I have plotted several trials there and included the predicted force according to equation 8. O4 is indeed the largest thrust curve. Also, in

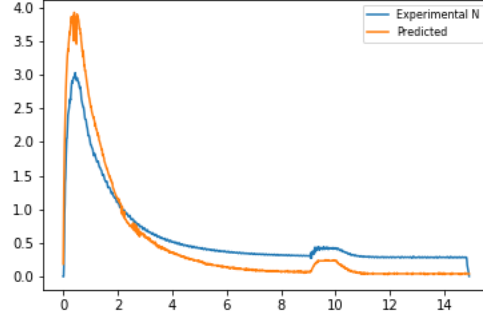


Figure 5: Several trials thrust curves plotted with the predicted thrust

viewing these thrust curves it is important to recognize the predicted force is the predicted force per unit mass, but the actual curve is per some different mass value. However, since the throat of the nozzle is constant through all trials the mass flow rate should be constant through all trials as well. So afterwards the unit for the mass can be set to some convenient unit and be compared through all data.

Tacking on an absolute value will not only not resolve the issue here but it is also infounded. The next thought is to make a guess for the temperature values. We can assume the change in temperature will be similar throughout all trials. We can also assume that the greater the expansion rate, the lower the exit temperature. So, it may be possible to

3 Results of Analysis

4 Conclusion

Nomenclature

γ	Ratio of specific heats
A_e	Exit area of nozzle
A_t	Throat area of nozzle
C_F	Thrust coefficient
F	Force or thrust
g	Acceleration due to gravity

I_{sp}	Specific impulse
M	Mach number
m	Mass
$N1$	No expansion, trial 1
$N2$	No expansion, trial 2
$O1$	Optimum area ratio, trial 1
$O11$	Overexpanded area ratio 1, trial 1
$O12$	Overexpanded area ratio 1, trial 2
$O2$	Optimum area ratio, trial 2
$O21$	Overexpanded area ratio 2, trial 1
$O22$	Overexpanded area ratio 2, trial 2
$O31$	Overexpanded area ratio 3, trial 1
$O32$	Overexpanded area ratio 3, trial 2
$O41$	Overexpanded area ratio 4, trial 1
$O42$	Overexpanded area ratio 4, trial 2
P_a	Ambient pressure
P_c	Chamber pressure
P_e	Exit pressure
t	Time
T_c	Chamber temperature
T_e	Exit temperature
$U11$	Underexpanded area ratio 1, trial 1
$U12$	Underexpanded area ratio 1, trial 2
$U21$	Underexpanded area ratio 2, trial 1
$U22$	Underexpanded area ratio 2, trial 2
$U31$	Underexpanded area ratio 3, trial 1
$U32$	Underexpanded area ratio 3, trial 2
$U41$	Underexpanded area ratio 4, trial 1
$U42$	Underexpanded area ratio 4, trial 2

References

- [1] Norman Harry Langton. *Rocket propulsion*. Space research and technology: v. 2. American Elsevier Pub. Co., 1970.