ECS7012P - Music and Audio Programming Assignment 2: Drum Machine

Max Tamussino, 200579179

March 24, 2021

Contents

1   Introduction

This report covers the implementation of a simple drum machine using the Bela Platform [1]. It features an accelerometer, the orientation of which is used to select one of five drum patterns. A drum pattern is a pre-defined pattern in which drum audio samples are played, such as the example depicted in Figure 1. Turning the sensor upside down plays the samples backwards. Additionally, a potentiometer is used to adjust the playing speed, while two buttons are used to calibrate the accelerometer, pause and unpause. Tapping the accelerometer will temporarily play a fill pattern and return to the pattern that played before after finishing.
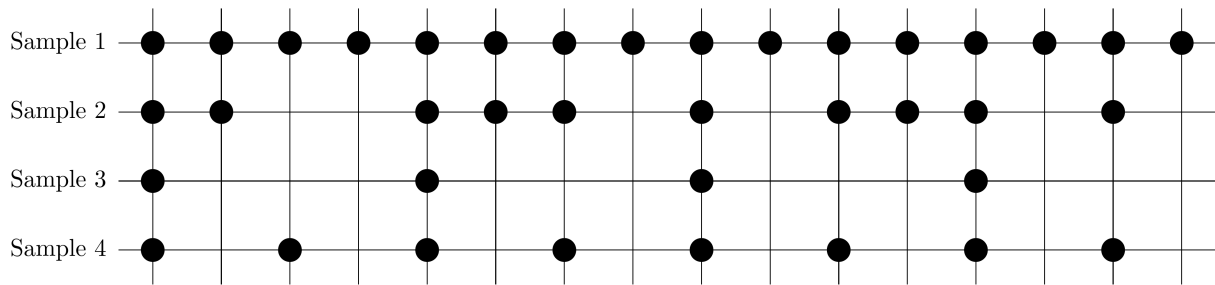

Figure 1: Example drum pattern consisting of four different audio samples

2   User Interface

A potentiometer is used to adjust the speed of the playing drum pattern. This does not affect the speed of individual samples, but the time between them. It may be adjusted to be bewteen $50\,\text{ms}$ to $1000\,\text{ms}$ using the full range of the potentiometer. Moreover, a LED lights up for $2\,\text{ms}$ on each beat. One button makes the drum machine start and stop playing, another button is used to calibrate the accelerometer as described in Section 3.1. The use of the accelerometer to select drum patterns is described in the following Section.

3   Accelerometer

The accelerometer was mounted above the Bela board so that it could be moved into different orientations by hand, allowing control of the drum machine. The used sensor *MMA7361* [2] has three analog outputs, each representing acceleration in one axis. Each of those channels shows a voltage $V_{off} \approx 1.65\,\text{V}$ when $0\,\text{g}$ is measured in its axis. In the selected measurement range of $\pm 1.5\,\text{g}$, the sensitivity is given by $S_{1.5g} \approx 800\,\text{mV}\,\text{g}^{-1}$. These values were however discovered to be quite different for each channel, which is why it has to be calibrated upon powerup.

3.1   Calibration

To obtain both V_{off} and $S_{1.5g}$ for all three channels, the accelerometer has to be put into three orientations. More advanced calibration techniques use many more orientations [3], however these are unfeasible for this project. Each of the three orientations should

measure $1\,\mathrm{g}$ in one and $0\,\mathrm{g}$ in both other directions. This assumes ideal linearity of the sensor, as only two measurements are conducted per axis (V_{0g} and V_{1g}). Although there are actually two measurements for V_{0g} per axis using this method, only the last value is used. Calculating the mean of both values did not noticably improve the results. The order of the used orientations does not matter: Assuming one axis measures $1\,\mathrm{g}$ and the others $0\,\mathrm{g}$, the intended position can be derived. The latter measurement directly yields $V_{0g} = V_{off}$ for its channels, while the measurement of V_{1g} is used to calculate $S_{1.5g}$ by

$$S_{1.5g} = \frac{V_{1g} - V_{0g}}{1\,\mathrm{g}}. \tag{1}$$

A button is used to signal that the accelerometer has been placed into one of these positions. After calibrating all three axes, the correct acceleration for each axis can be calculated by

$$a = \frac{V_{in} - V_{off}}{S_{1.5g}} \tag{2}$$

or (as it is implemented) directly by

$$a = \frac{V_{in} - V_{0g}}{V_{1g} - V_{0g}} \cdot 1\,\mathrm{g}. \tag{3}$$

3.2   Filters

The output of the sensor was measured using the standard Bela analog sampling rate of $22.05\,\mathrm{kHz}$. To reduce measurement noise and other influences like shaking of the controlling hand, this signal was filtered. A lowpass filter with a very low cutoff frequency is required to detect only changes in the steady-state orientation. At this high sampling rate a sufficiently low cutoff frequency is difficult to realise. FIR filters need to be of order $N > 2000$ and IIR filters often become instable after transitioning to single-precision floating point calculations due to truncation errors [4]. This is why initially only a simple first-order IIR lowpass was used to remove measurement noise. The resulting smoother signal was sampled down by the factor 32. This allowed the second stage lowpass filter to also consist of only one first-order IIR lowpass. The resulting signal was stable enough to be used to determine the current orientation state of the accelerometer. Figure 2 shows the z-axis acceleration transitioning from $1\,\mathrm{g}$ to $0\,\mathrm{g}$ in $400\,\mathrm{ms}$. Both filters clearly show introduced latency.

3.3   State machine

Firstly, the measured acceleration values are examined for steadyness. If

$$|a| = \sqrt{a_x^2 + a_y^2 + a_z^2} > 1.05\,\mathrm{g}, \tag{4}$$

the sample is considered unsteady and is discarded. This is because in this case additional acceleration components other than gravity are involved.

Otherwise, the current orientation of the calibrated accelerometer is determined using a state machine, which is depicted in Figure 3. Hysteresis was used to avoid bouncing
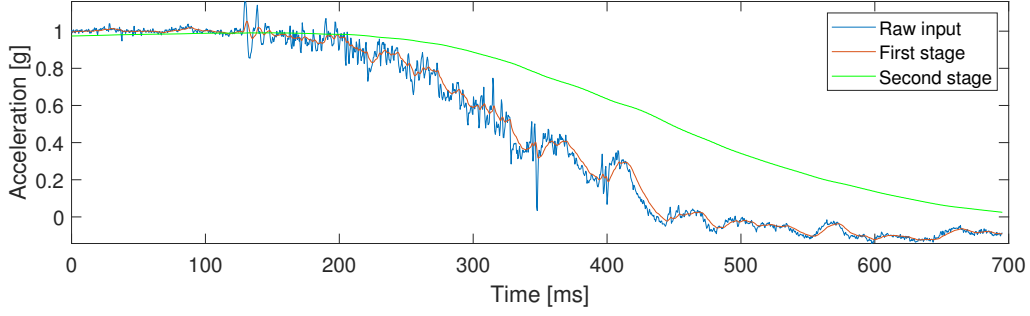
3

Figure 2: Result of the designed filter stages

between two states: A high threshold $t_{enter} = 0.8\,\mathrm{g}$ and a low threshold $t_{exit} = 0.6\,\mathrm{g}$ is defined. Starting in the intermediate state, it is checked whether any axis experiences acceleration by more than t_{enter}. If so, The according state is entered and only left again if the according acceleration falls below the lower t_{exit}.
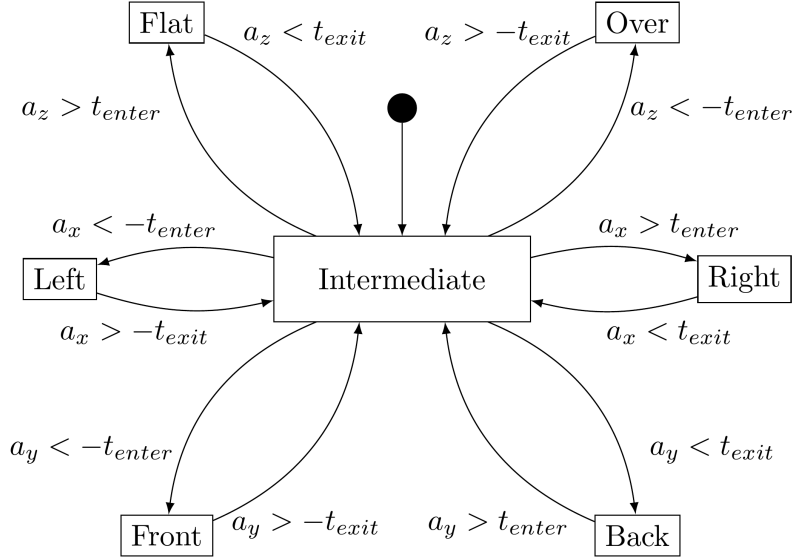

Figure 3: State machine to determine accelerometer orientation state

Because the state machine enters a state before the theoretical maximum of $1\,\mathrm{g}$, this cancels the effect of the high latency introduced by the lowpass filters. This however depends strongly on the speed of the transition.

3.4 Tap detection

To detect a tap on the accelerometer, a high-pass filter may be implemented to only pass spikes in the acceleration. Alternatively, the total acceleration $|a|$ may be considered. Previously, the total acceleration was used to determine whether or not an acceleration sample is steady. For $|a| > 1.05\,\mathrm{g}$, the sample is not considered for the calculation of the orientation. A simple higher threshold $|a| > 1.1\,\mathrm{g}$ has however proven to be a reliable indicator for a tap on the accelerometer. This approach was considered superior to a

high-pass filter as the value of $|a|$ was already calculated, the implementation is simpler and the tap can be detected from every direction.

References

[1] A. McPherson and V. Zappi, "An environment for submillisecond-latency audio and sensor processing on beaglebone black," *Journal of the audio engineering society*, May 2015.

[2] Freescale Semiconductor, *Mma7361l ±1.5g, ±6g three axis low-g micromachined accelerometer datasheet*, 2008.

[3] M. Sipos, P. Paces, J. Rohac, and P. Novacek, "Analyses of triaxial accelerometer calibration algorithms," *IEEE Sensors Journal*, vol. 12, no. 5, pp. 1157–1165, 2012.

[4] M. Harris, R. Kelly, D. McLeod, and M. Story, "Effects in high sample rate audio material," in *AES 20th Conference*, 1998.