


(a) Per-Bit AUROC: Validation vs OOD
(color = bit frequency, log scale)



(b) Distribution of per-bit AUROC drops
(positive = worse OOD performance)

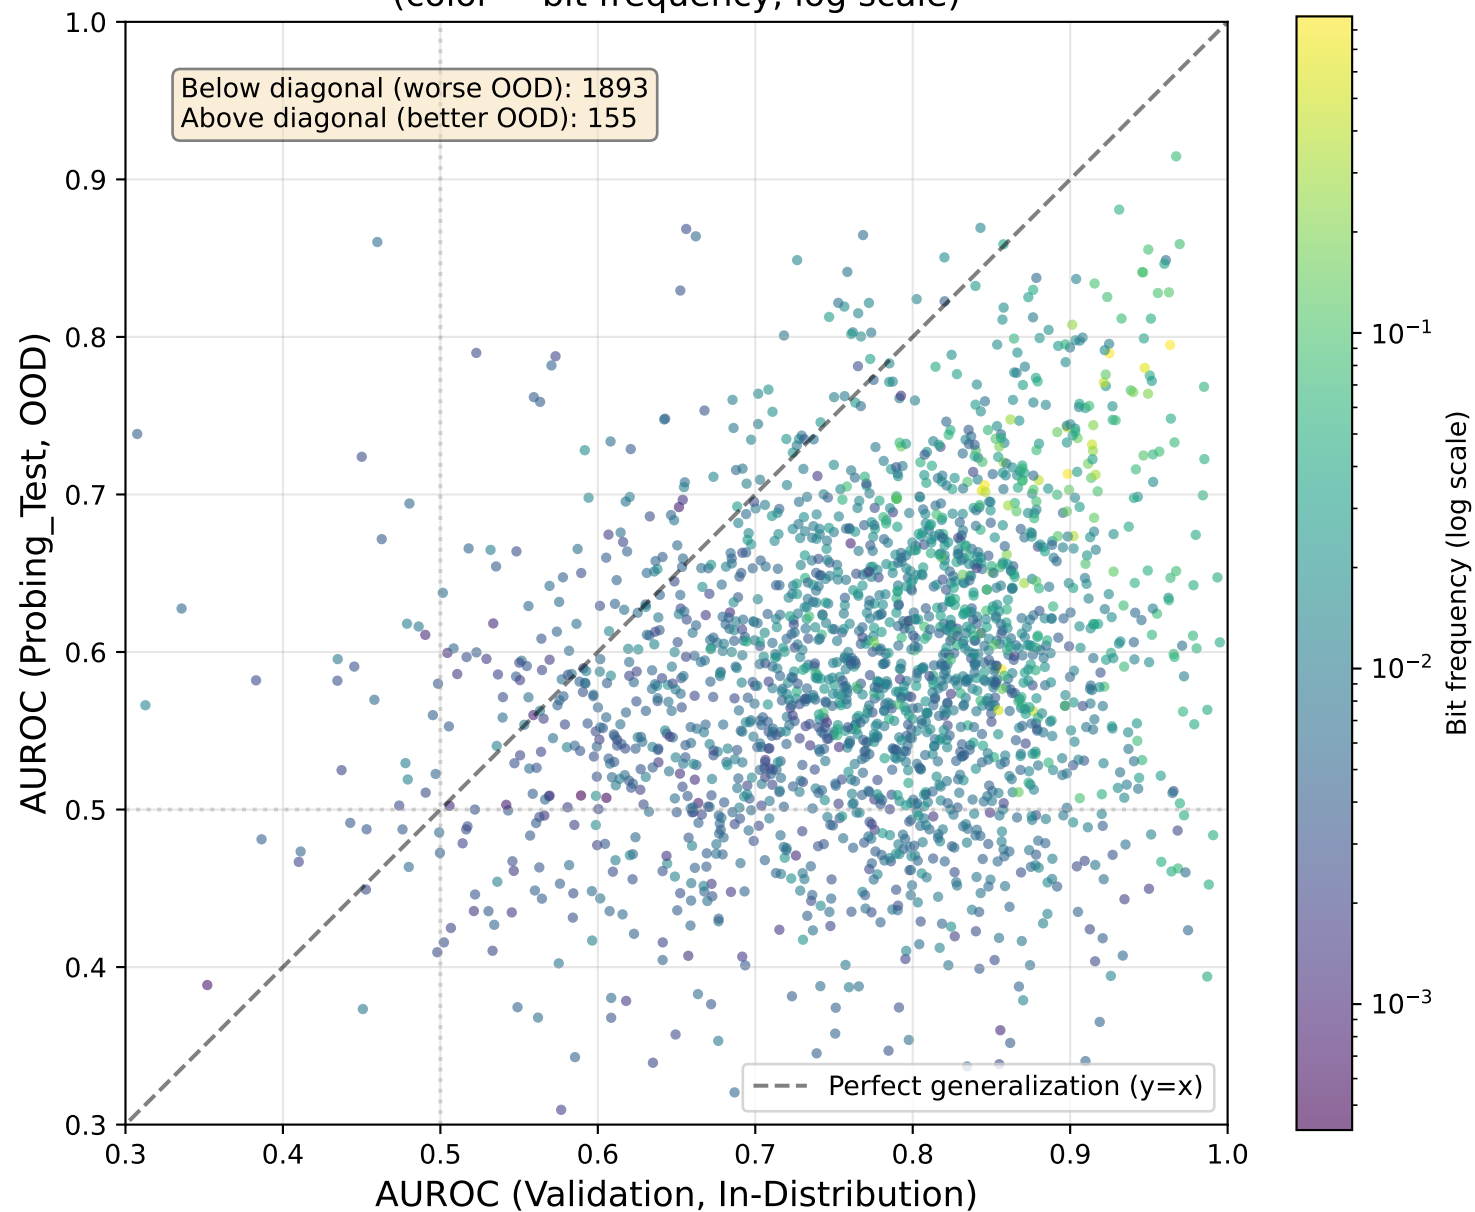