


Specifications



Model	EX12	
Operating Weight	1120 kg	
Bucket Capacity	0.02 m ³	
System Pressure	18 MPa	
Dimensions (Overall LxWxH)	2902x940x2193mm	
Engine	Model	Koop 192
	Output @rpm	12HP/8.7KW@2200
	Displacement	499 cc
Drive System	Gradeability	30°
	Travel Speed (Low/High)	2.1/4.1 km/h
	Track Length	1290 mm
	Track Shoe Width	230 mm
Unit Swing Speed	Central Swing	9.5 rpm
Boom Swing Angle	Lift/Right	45°/45°

Working Range

	Unit:	mm
A	Max.Digging Height	2645
B	Max.Dumping Height	1825
C	Max.Digging Depth	1600
D	Max.Vertical Digging Depth	1200
E	Max.Digging Radius	3024
H	Tail Turning Radius	730
	Max.Dozer Blade Lifting Distance	149
	Max.Dozer Blade Cutting Distance	338



Dimensions

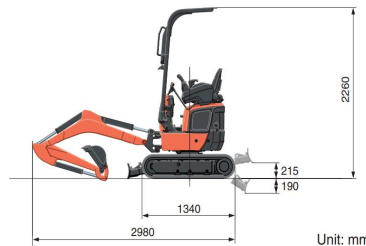

Unit: mm

Materials and specifications are subject to change without notice.
 Featured machines in photos may include additional equipment. Contact your dealer for available options.
 ©2026 TigerTech Corporation, All Rights Reserved.

www.TIGER2GO.com

TigerTech Machinery Limited



TIGER

Smart Tiger By Tech
www.Tiger2go.com

COMPACT EXCAVATOR EX12

Ultra-compact excavator with the robust power gives you advanced durability and performance in tight spaces.



HorsePower: 12HP@2200
 Operating Weight: 1120kg
 Bucket Capacity: 0.02m³

SUPERIOR PERFORMANCE



TigerTech new generation 940mm width, tight tail excavator can work safely in tight work site. As well as these tigers raise the standard in 1-1.5 ton category with the powerful digging force, wider working range, smoother travel, improved versatility, and higher working efficiency.

Redesigned Boom and bucket

Your tiger's improved boom lifting capacity, well-balanced robust arm and bucket increased 5.5% breakout force, the tougher paw allow you to lift and dig faster in tough work.

One Auxiliary Circuit Divert Valve

The diverter valve allows auxiliary oil to be diverted to operate auxiliary attachments without removing the thumb attachment pipelines, boosting on-site efficiency.

Updated Swing Boom Function

Redesigned and strengthened boom swing cylinder build and structure optimized boom swing speed and stability. And get it as standard equipment to make your tiger more versatile and skillful.

Quick Coupler and Thumb Clamp

To adapt to various tasks and boost productivity, bucket quick couplers and thumb clamps are essential. This machine comes standard with these features, delivering superior efficiency and performance for versatile operation.

Rear-mounted Boom Cylinder

The tiger's boom cylinder is situated behind the boom for maximum protection, especially during breaker or dumping operation. Movement speeds of front attachments and lifting power have been well adjusted thanks to the boom cylinder's large-diameter rod and optimal hydraulic pressure.

Excellent Robustness Diesel

EX12 Digger adopt KOOP 192 Direct Injection Diesel, engineered with the power to maximize digging and lifting performance. The diesel gives you reliable strength and durability with lower fuel consumption.

Reliable Hydraulic System

Engineered hydraulic system provide reliable and smooth output for your various task. The system with quickly response and easy operation enhance productivity and fuel consumption economy.

Updated Concealed Motors and Hoses

All the tiger's travel motors and hoses are enclosed within the track frame with reinforced plate armor for enhanced protection. This is a premium feature for mini diggers of the class.



WORK IN COMFORT AND SAFETY



TigerTech's premium operator space is enhanced to ensure optimal comfort and efficiency throughout the entire workday. All controls are ergonomically positioned for faster, more intuitive operation. Most importantly, safety features are a top priority, ensuring safe and reliable operation at all times.

Smart Damping Boom Cylinder

TigerTech has adopted advanced damping cylinder technology for the boom, which delivers superior shock absorption compared to conventional equipment, ensuring a more comfortable working experience.

Engine Safety Start

This system prevents accidental engine startup when control levers are in the lowered position. It eliminates unexpected machine and attachment movement during startup.

Wider Foot Space

The latest design give you spacious legroom, increased by 39mm from former model, you will have a comfort feeling while digging.

Wrist Rests

Thoughtfully designed wrist rests enhance control precision and reduce operator fatigue.

Semi-Suspension Seat

Designed for better fit and comfort for long hours of work. **TigerTech** standard semi-suspension seat minimizes strain and operating fatigue by accommodating individual posture and weight.

New LED Boom Work Light

Bright LED boom work light provides ample illumination for nighttime and dark-area work, enabling safer, more efficient operation.

Robust ROPS Cabin/Canopy

For enhanced safety, all **TigerTech** machines are equipped with high-level safety systems that protect against falling debris and unintended rollovers.

Hydraulic Pilot as Standard


Hydraulic pilot controls deliver smooth, efficient operation, reducing operator fatigue throughout the workday. All machine joysticks feature hydraulic pilot control as standard.

Dozer Blade Lever

The dozer blade control lever is located on the right armrest, making it easy to operate. Lifting and lowering the dozer blade is relaxed.

Engine Starter Switch and Throttle

The engine starter switch and throttle lever are located behind the right armrest, arranged neatly for easy operation.

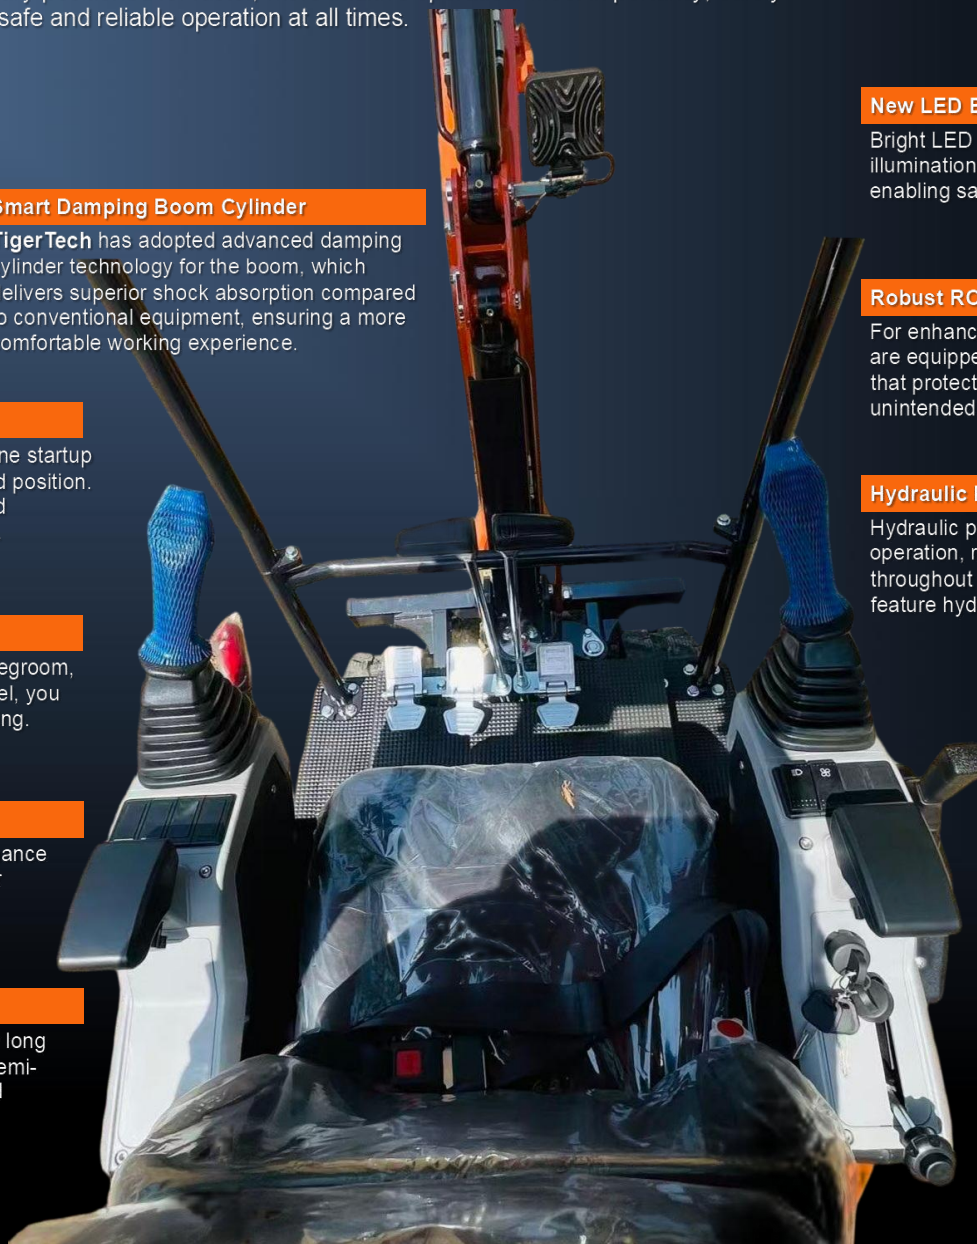

EASY MAINTENANCE

TigerTech has simplified routine maintenance by consolidating key engine components on one side for easy access. Engine and other critical components can be inspected and serviced quickly and easily.



Dual element air cleaner




Fuel filter



Hydraulic oil filter

Obviously, **TigerTech's** attention to user-friendliness can be found in the engine layout. Additionally, the full-opening steel rear and side hoods provide extra durability and easy access for repairs.

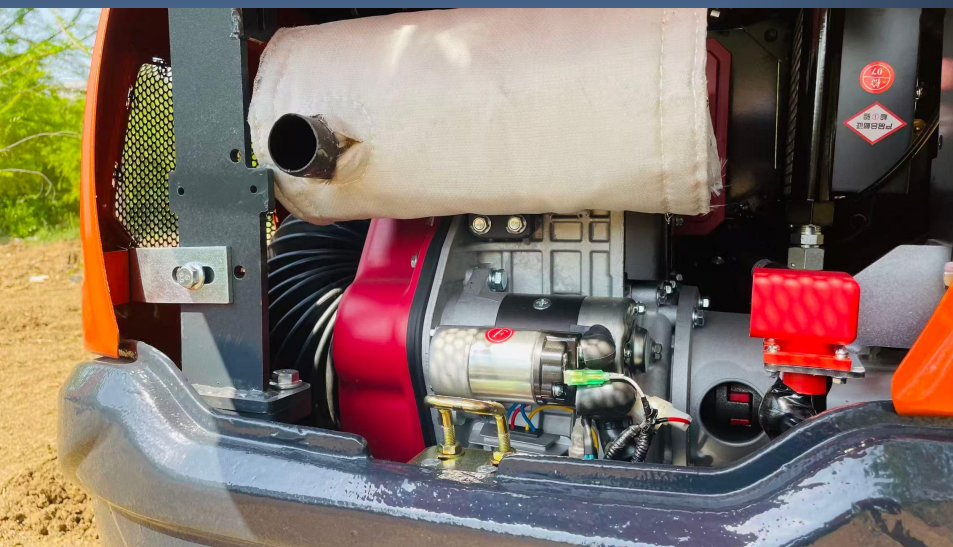

VERSATILE ATTACHMENTS

Standard Equipment

Safety systems

- ✓ Engine start safety system
- ✓ Travel motor with disc brake
- ✓ Swing motor with disc brake

Operator Station

- ✓ ROPS/FOPS Canopy/Cabin
- ✓ Semi-suspension seat
- ✓ Hydraulic pilot control levers
- ✓ wrist rests

Undercarriage

- ✓ 230mm rubber tracks

Working Equipment

- ✓ 1 x Boom-mounted LED work light
- ✓ Manual Bucket Quick Coupler
- ✓ Swing Boom with Joystick Button Control
- ✓ Thumb Clamp with pipes
- ✓ Dozer blade

Hydraulic System

- ✓ Hydraulic pilot and joystick
- ✓ AUX1 via foot pedal control
- ✓ AUX1 piping with diverter valve

Optional Equipment

- ✓ Second Auxiliary circuit (AUX2)
- ✓ Variable gauge system
- ✓ 230mm Steel tracks
- ✓ Cab with A/C
- ✓ Sun and rain protection cover

Attachments



Hydraulic Breaker



Ripper




Hydraulic Auger



Quick Coupler



Bucket thumb

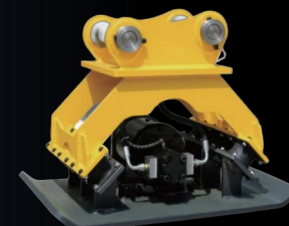

Compactor