


Pinout view

System view

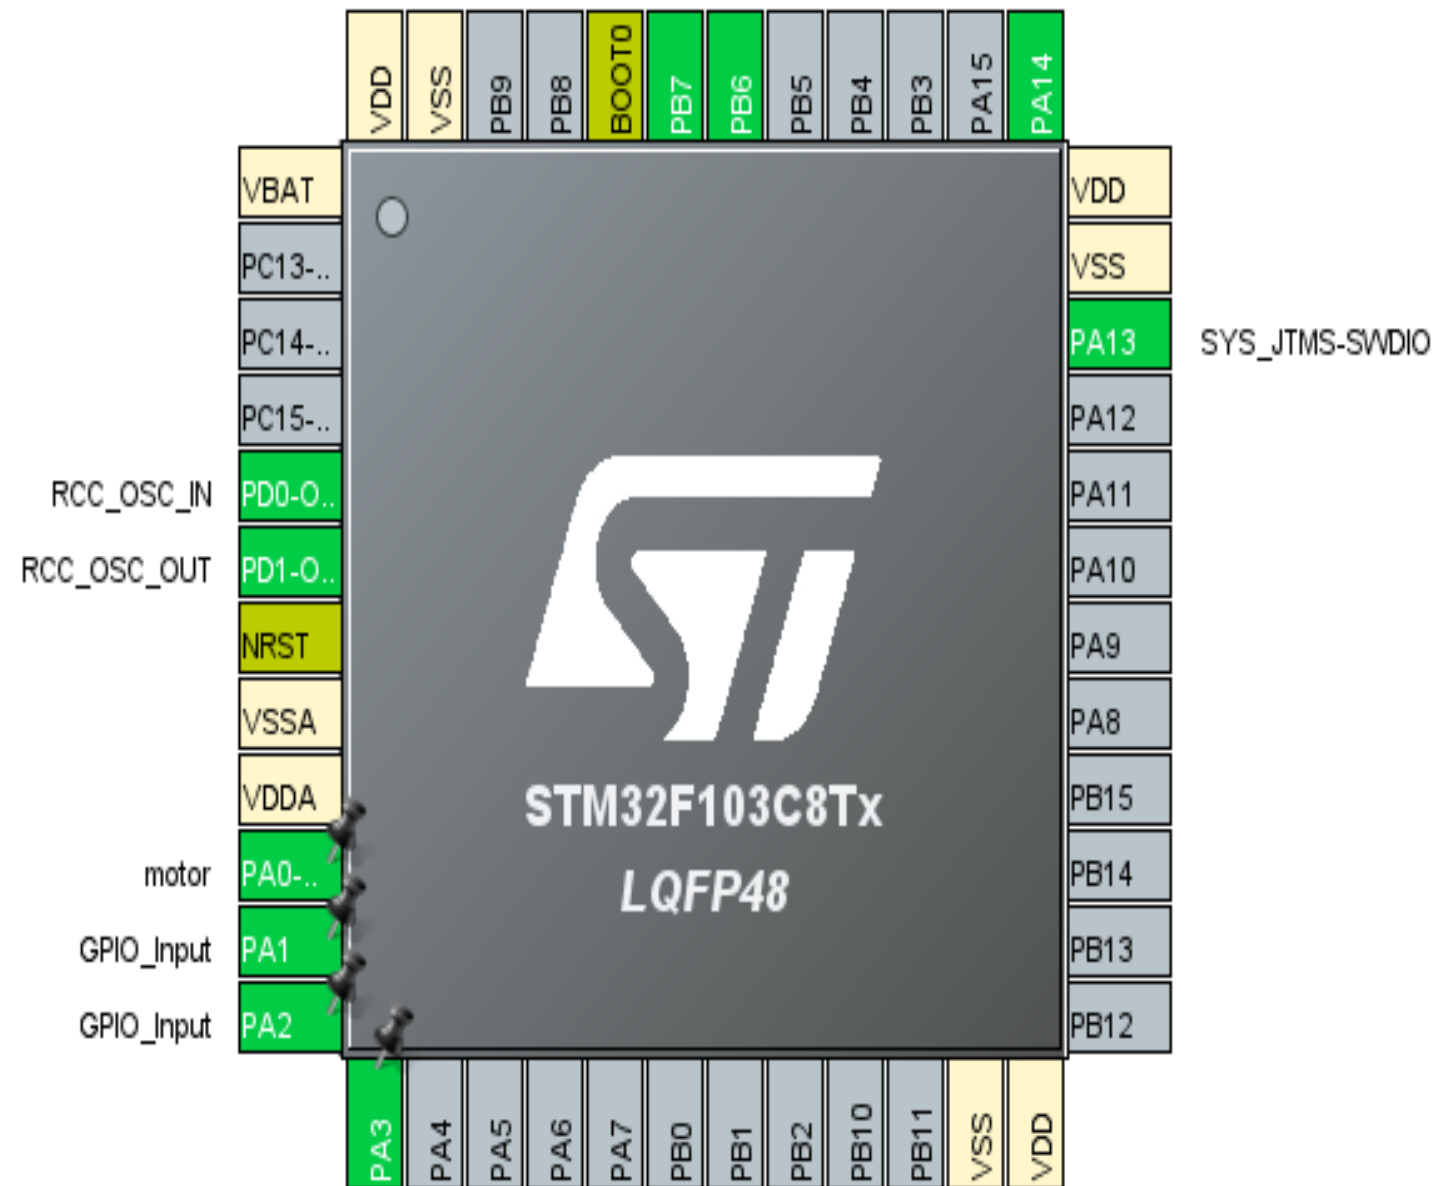

Pinout & Configuration

Clock Configuration

▼ Software Packs

Categories

A->Z

Connectivity

CAN

✓ I2C1

I2C2

SPI1

SPI2

USART1

✗ USART2

USART3

USB

Computing

Middleware

I2C1 Mode and Configuration

Mode

I2C

Configuration

Reset Configuration

✓ DMA Settings

✓ GPIO Settings

✓ Parameter Settings

✓ User Constants

✓ NVIC Settings

Configure the below parameters :





▼ Master Features

Pinout & Configuration

Clock Configuration

Software Packs



Categories

A->Z

Timers

RTC

TIM1

TIM2

☒ TIM3

☐ TIM4

Connectivity

CAN

☒ I2C1

I2C2

SPI1

SPI2

USART1

☒ USART2

USART3

USB

TIM3 Mode and Configuration

Mode

Slave Mode

Trigger Source

☒ Internal Clock

Channel1

Channel2

Channel3

Configuration

Reset Configuration

☒ NVIC Settings

☒ DMA Settings

☒ Parameter Settings

☒ User Constants

Configure the below parameters :



Counter Settings

Prescaler (PSC - 16 bits ... 7999

Counter Mode Up

Counter Period (AutoRelo.. 499

Internal Clock Division (C... No Division

auto-reload preload Disable

Trigger Output (TRGO) Param

Pinout & Configuration

Clock Configuration

Software Packs



Categories

A->Z

Timers

RTC

TIM1

TIM2

TIM3

TIM4

Connectivity

CAN

I2C1

I2C2

SPI1

SPI2

USART1

USART2

USART3

USB

TIM3 Mode and Configuration

Mode

Slave Mode Trigger Source ☒ Internal ClockChannel1 Channel2 Channel3

Configuration

Reset Configuration

NVIC Settings

DMA Settings

Parameter Settings

User Constants

VIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
Global interrupt	☒	0	0