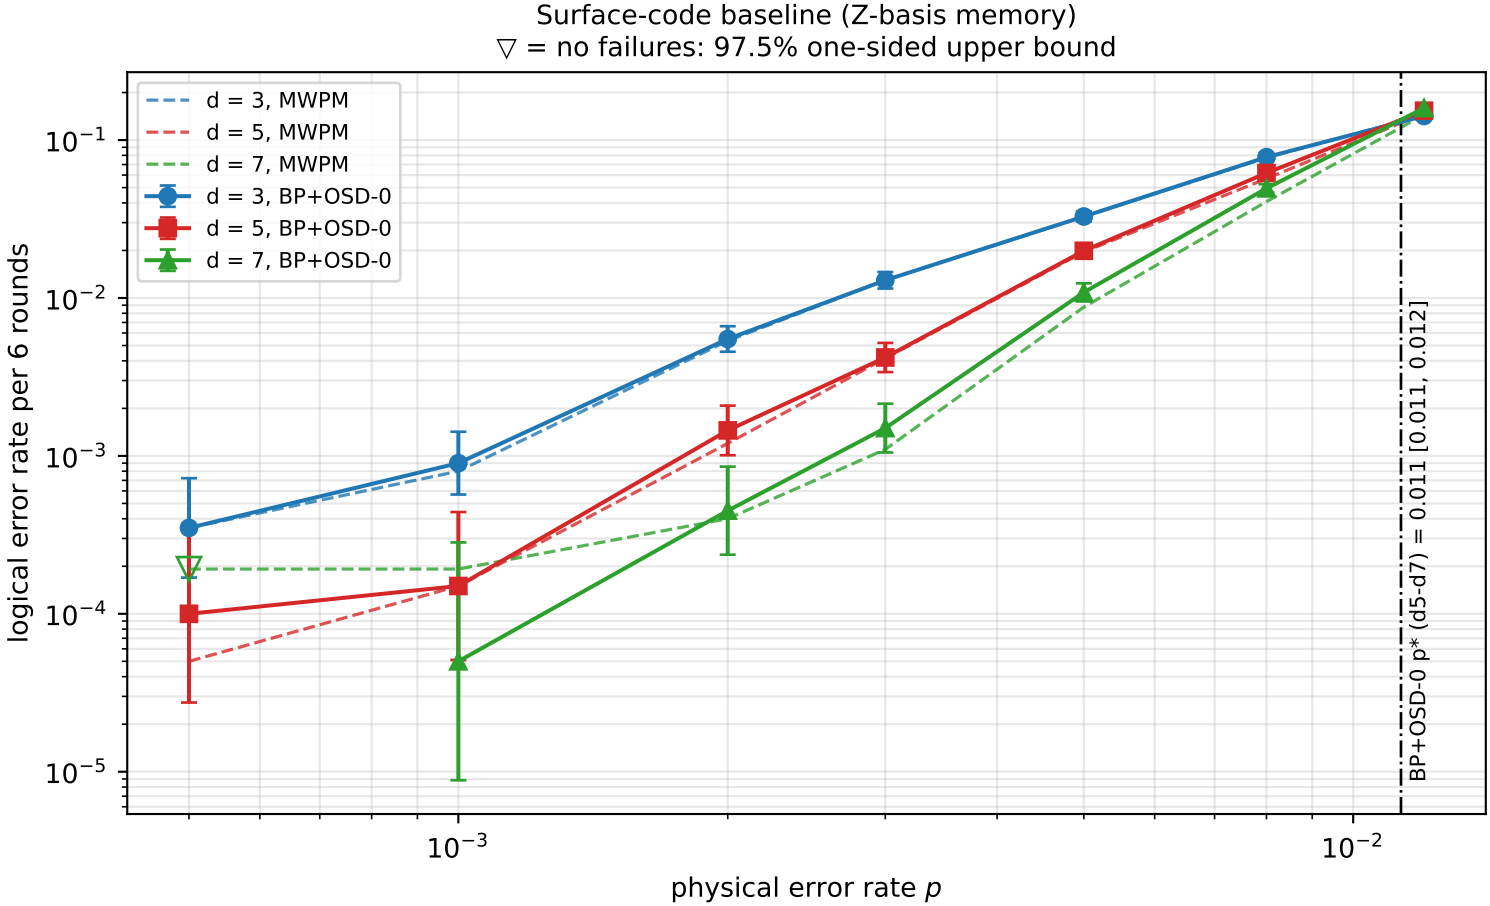
Surface-code baseline (Z-basis memory)
▽ = no failures: 97.5% one-sided upper bound
d = 3, MWPM
d = 5, MWPM
d = 7, MWPM
d = 3, BP+OSD-0
d = 5, BP+OSD-0
d = 7, BP+OSD-0
logical error rate per 6 rounds
physical error rate p
BP+OSD-0 p* (d5-d7) = 0.011 [0.011, 0.012]