
Cisco Packet Tracer - C:\Users\Asus\Desktop\Mayureshxp[Networking_Portfolio]\Project_1_Small_Company_Networkk.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x: 23, y: 243 Root 00:02:30

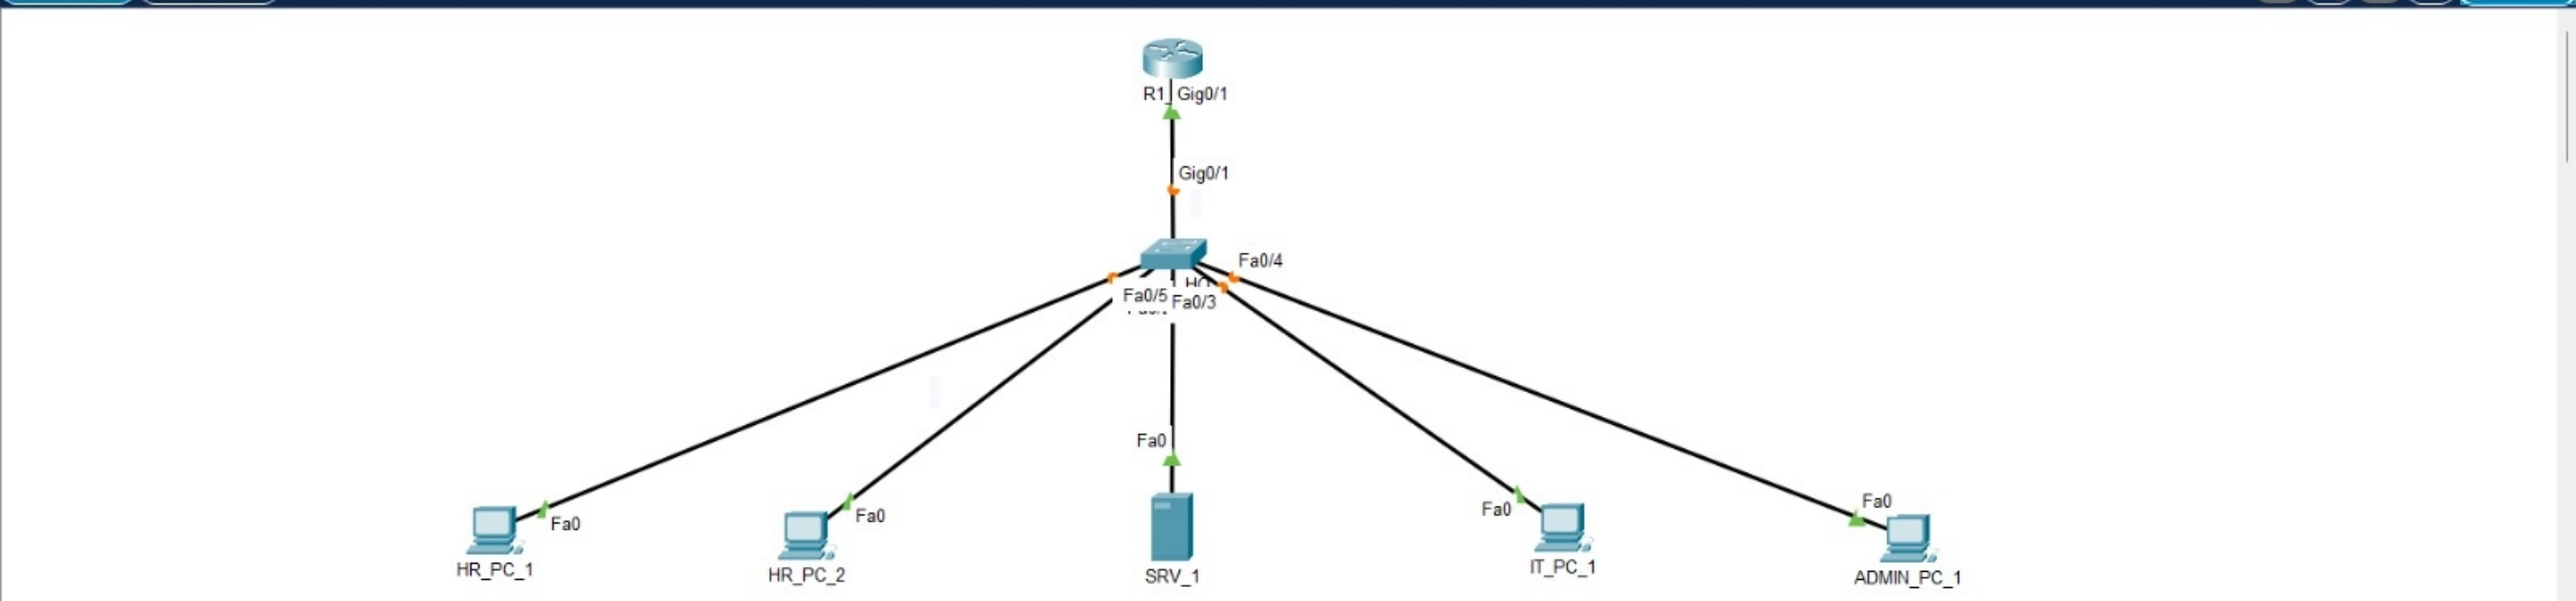

Time: 00:00:05

Realtime Simulation

PT8200 4331 4321 IR8340 1941 2901 2911 819IOX 819HGW 829 1240

Search for device

(Select a Device to Drag and Drop to the Workspace)

Scenario 0

New Delete

Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete

33°C Sunny

Search

ENG IN

17:34 26-10-2026

HR_PC_2

Physical | Config | Desktop | Programming | Attributes

GLOBAL
- Settings
- Algorithm Settings

INTERFACE
- FastEthernet0
- Bluetooth

Global Settings

Display Name: HR_PC_2

Interfaces: FastEthernet0

Gateway/DNS IPv4
- ○ DHCP
- ◉ Static

Default Gateway: 192.168.10.1

DNS Server:

Gateway/DNS IPv6
- ○ Automatic
- ◉ Static

Default Gateway:

DNS Server:

Device Clock: 04:45:54 Tue Mar 2 1993 UTC

NTP

Server Ip:

Authentication
- ○ Enable ◉ Disable

Password:

PTP

Profile: Power

- ○ Enable ◉ Disable

☐ Top

33°C Sunny

Search

ENG IN

17:35 26-10-2026

SRV_1

Physical | Config | Services | Desktop | Programming | Attributes

GLOBAL
Settings
Algorithm Settings
INTERFACE
FastEthernet0

Global Settings

Display Name: SRV_1

Gateway/DNS IPv4
- ○ DHCP
- ◉ Static

Default Gateway: 192.168.40.1
DNS Server:

Gateway/DNS IPv6
- ○ Automatic
- ◉ Static

Default Gateway:
DNS Server:

Device Clock: 02:13:20 Sat Oct 10 2026 UTC

PTP

Profile: Power

- ○ Enable ◉ Disable

☐ Top

33°C Sunny

Search

ENG IN

17:36 26-10-2026

SW1_HQ

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/5, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up

%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up


Switch>enable
Switch#show vlan brief

VLAN Name                              Status    Ports
---- --------------------------------- --------- -------------------------------
1    default                           active    Fa0/6, Fa0/7, Fa0/8, Fa0/9
                                                 Fa0/10, Fa0/11, Fa0/12, Fa0/13
                                                 Fa0/14, Fa0/15, Fa0/16, Fa0/17
                                                 Fa0/18, Fa0/19, Fa0/20, Fa0/21
                                                 Fa0/22, Fa0/23, Fa0/24, Gig0/2
10   HR                                active    Fa0/1, Fa0/2
20   IT                                active    Fa0/3
30   ADMIN                             active    Fa0/4
40   SERVER                            active    Fa0/5
1002 fddi-default                      active
1003 token-ring-default                active
1004 fddinet-default                   active
1005 trnet-default                     active
Switch#
```

Copy Paste

Top

33°C Sunny

Search

ENG IN

17:37 26-10-2026

SW1_HQ

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up

%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up


Switch>enable
Switch#show vlan brief

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Fa0/6, Fa0/7, Fa0/8, Fa0/9
                                                Fa0/10, Fa0/11, Fa0/12, Fa0/13
                                                Fa0/14, Fa0/15, Fa0/16, Fa0/17
                                                Fa0/18, Fa0/19, Fa0/20, Fa0/21
                                                Fa0/22, Fa0/23, Fa0/24, Gig0/2
10   HR                               active    Fa0/1, Fa0/2
20   IT                               active    Fa0/3
30   ADMIN                            active    Fa0/4
40   SERVER                           active    Fa0/5
1002 fddi-default                     active
1003 token-ring-default               active
1004 fddinet-default                  active
1005 trnet-default                    active
Switch#show interfaces trunk
Port        Mode         Encapsulation  Status        Native vlan
Gig0/1      on           802.1q         trunking      1

Port        Vlans allowed on trunk
Gig0/1      1-1005

Port        Vlans allowed and active in management domain
Gig0/1      1,10,20,30,40

Port        Vlans in spanning tree forwarding state and not pruned
Gig0/1      1,10,20,30,40

Switch#
```

Copy Paste

Top

33°C Sunny

Search

ENG IN

17:38 26-10-2026

R1_HQ

Physical Config CLI Attributes

IOS Command Line Interface

```
A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.

Cisco CISCO2911/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX152400KS
3 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!


%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1.10, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1.20, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1.30, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1.40, changed state to up


R1_HQ>enable
R1_HQ#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
GigabitEthernet0/0     unassigned      YES unset  administratively down down
GigabitEthernet0/1     unassigned      YES unset  up                    up
GigabitEthernet0/1.10  192.168.10.1    YES manual up                    up
GigabitEthernet0/1.20  192.168.20.1    YES manual up                    up
GigabitEthernet0/1.30  192.168.30.1    YES manual up                    up
GigabitEthernet0/1.40  192.168.40.1    YES manual up                    up
GigabitEthernet0/2     unassigned      YES unset  administratively down down
Vlan1                  unassigned      YES unset  administratively down down
R1_HQ#
```

Copy Paste

Top

33°C Sunny

Search

ENG IN

17:41 26-10-2026

R1_HQ

Physical Config CLI Attributes

IOS Command Line Interface

```
Cisco CISCO2911/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX152400KS
3 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!


%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1.10, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1.20, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1.30, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1.40, changed state to up


R1_HQ>enable
R1_HQ#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
GigabitEthernet0/0     unassigned      YES unset  administratively down down
GigabitEthernet0/1     unassigned      YES unset  up                    up
GigabitEthernet0/1.10  192.168.10.1    YES manual up                    up
GigabitEthernet0/1.20  192.168.20.1    YES manual up                    up
GigabitEthernet0/1.30  192.168.30.1    YES manual up                    up
GigabitEthernet0/1.40  192.168.40.1    YES manual up                    up
GigabitEthernet0/2     unassigned      YES unset  administratively down down
Vlan1                  unassigned      YES unset  administratively down down
R1_HQ#show ip dhcp binding
IP address       Client-ID/              Lease expiration        Type
                 Hardware address
192.168.10.10    0007.ECEC.4463            --                    Automatic
192.168.20.10    000A.F3D8.06DA            --                    Automatic
192.168.30.10    00D0.BAB0.89E4            --                    Automatic
R1_HQ#
```

Copy Paste

Top

33°C Sunny

Search

ENG IN

17:42 26-10-2026

HR_PC_1

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.1

Pinging 192.168.10.1 with 32 bytes of data:

Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Top

33°C
Sunny

Search

ENG
IN

17:42
26-10-2026

HR_PC_1

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.30.1

Pinging 192.168.30.1 with 32 bytes of data:

Reply from 192.168.30.1: bytes=32 time<1ms TTL=255
Reply from 192.168.30.1: bytes=32 time<1ms TTL=255
Reply from 192.168.30.1: bytes=32 time=1ms TTL=255
Reply from 192.168.30.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.30.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

Top

33°C
Sunny
Search
ENG
IN
17:47
26-10-2026

SRV_1

Physical Config Services Desktop Programming Attributes

SERVICES

- HTTP
- DHCP
- DHCPv6
- TFTP
- DNS
- SYSLOG
- AAA
- NTP
- EMAIL
- FTP
- IoT
- VM Management
- Radius EAP
- PRP

DNS

DNS Service: On / Off

Resource Records

Name: dhappa.local Type: A Record

Address: 192.168.40.10

Add | Save | Remove

No.	Name	Type	Detail
0	dhappa.local	A Record	192.168.40.10

DNS Cache

Top

33°C Sunny

Search

ENG IN

17:49 26-10-2026

HR_PC_1

Physical Config Desktop Programming Attributes

Web Browser X

< > URL http://dhappa.local Go Stop

Cisco Packet Tracer

DHAPPA - HQ Network.

Quick Links:
A small page
Copyrights
Image page
Image

Top

33°C Sunny

Search

ENG IN

17:51 26-10-2026

SW1_HQ

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/5, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up

%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up


Switch>enable
Switch#show port-security
Secure Port  MaxSecureAddr  CurrentAddr  SecurityViolation  Security Action
                (Count)       (Count)        (Count)
---------------------------------------------------------------------
        Fa0/1         1           1                0         Shutdown
        Fa0/2         1           1                0         Shutdown
        Fa0/3         1           1                0         Shutdown
        Fa0/4         1           1                0         Shutdown
        Fa0/5         1           1                0         Shutdown
---------------------------------------------------------------------
Switch#show port-security interface fa0/1
Port Security              : Enabled
Port Status                : Secure-up
Violation Mode             : Shutdown
Aging Time                 : 0 mins
Aging Type                 : Absolute
SecureStatic Address Aging : Disabled
Maximum MAC Addresses      : 1
Total MAC Addresses        : 1
Configured MAC Addresses   : 0
Sticky MAC Addresses       : 1
Last Source Address:Vlan   : 0007.ECEC.4463:10
Security Violation Count   : 0

Switch#
```

Copy Paste

Top

33°C Sunny

Search

ENG IN

17:52 26-10-2026

R1_HQ

Physical Config CLI Attributes

IOS Command Line Interface

```
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.

Cisco CISCO2911/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX152400KS
3 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!


%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1.10, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1.20, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1.30, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1.40, changed state to up


R1_HQ>enable
R1_HQ#sho ip ssh
SSH Enabled - version 2.0
Authentication timeout: 120 secs; Authentication retries: 3
R1_HQ#
```

Copy Paste

Top

31°C Sunny

Search

ENG IN

17:53 26-10-2026

R1_HQ

Physical Config CLI Attributes

IOS Command Line Interface

```
R1_HQ>enable
R1_HQ#show ip dhcp pool

Pool HR :
 Utilization mark (high/low)    : 100 / 0
 Subnet size (first/next)       : 0 / 0
 Total addresses                : 254
 Leased addresses               : 0
 Excluded addresses             : 3
 Pending event                  : none

 1 subnet is currently in the pool
 Current index        IP address range                    Leased/Excluded/Total
 192.168.10.1         192.168.10.1     - 192.168.10.254    0    / 3     / 254

Pool IT :
 Utilization mark (high/low)    : 100 / 0
 Subnet size (first/next)       : 0 / 0
 Total addresses                : 254
 Leased addresses               : 0
 Excluded addresses             : 3
 Pending event                  : none

 1 subnet is currently in the pool
 Current index        IP address range                    Leased/Excluded/Total
 192.168.20.1         192.168.20.1     - 192.168.20.254    0    / 3     / 254

Pool ADMIN :
 Utilization mark (high/low)    : 100 / 0
 Subnet size (first/next)       : 0 / 0
 Total addresses                : 254
 Leased addresses               : 0
 Excluded addresses             : 3
 Pending event                  : none

 1 subnet is currently in the pool
 Current index        IP address range                    Leased/Excluded/Total
 192.168.30.1         192.168.30.1     - 192.168.30.254    0    / 3     / 254
R1_HQ#
```

Copy Paste

Top

31°C Sunny

Search

ENG IN

17:54 26-10-2026