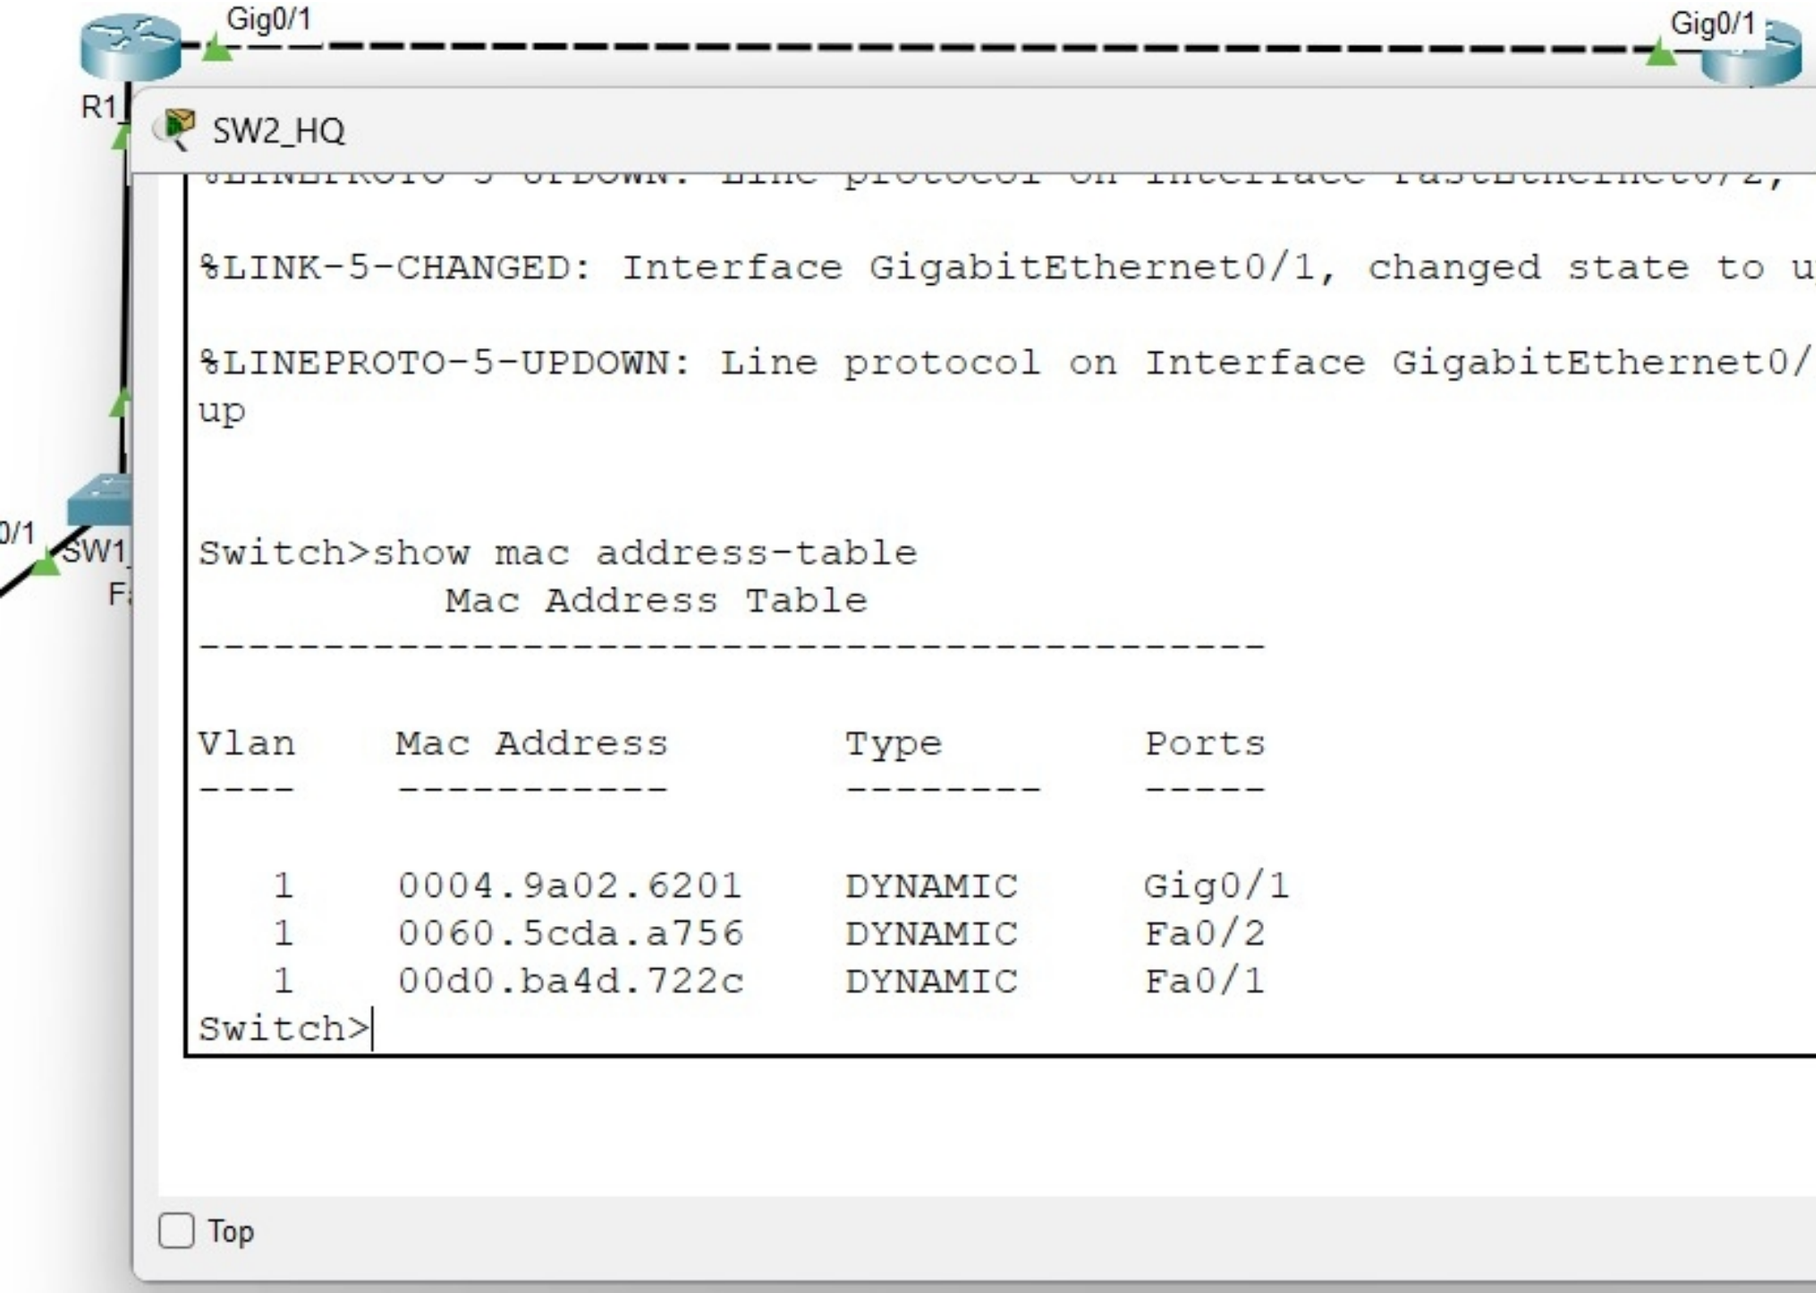

Gig0/1
Gig0/1
R1
SW2_HQ
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
Switch>show mac address-table
Mac Address Table
Vlan Mac Address Type Ports
1 0004.9a02.6201 DYNAMIC Gig0/1
1 0060.5cda.a756 DYNAMIC Fa0/2
1 00d0.ba4d.722c DYNAMIC Fa0/1
Switch>
Copy
Paste
Top

```
Pinging 192.168.20.11 with 32 bytes of data:

Reply from 192.168.20.11: bytes=32 time<1ms TTL=126
Reply from 192.168.20.11: bytes=32 time<1ms TTL=126
Reply from 192.168.20.11: bytes=32 time=6ms TTL=126
Reply from 192.168.20.11: bytes=32 time=11ms TTL=126

Ping statistics for 192.168.20.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 11ms, Average = 4ms

C:\>
```

R2_BRANCH

Physical Config CLI Attributes

IOS Command Line Interface


```
interface GigabitEthernet0/1
 ip address 10.0.0.2 255.255.255.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/2
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip classless
ip route 192.168.10.0 255.255.255.0 10.0.0.1
!
ip flow-export version 9
!
!
!
!
!
!
line con 0
!
line aux 0
!
line vty 0 4
 login
!
!
!
end



R2_BRANCH#
```

Copy Paste

Top

30°C
Partly sunny
Search
ENG
IN
17:55
31-10-2026

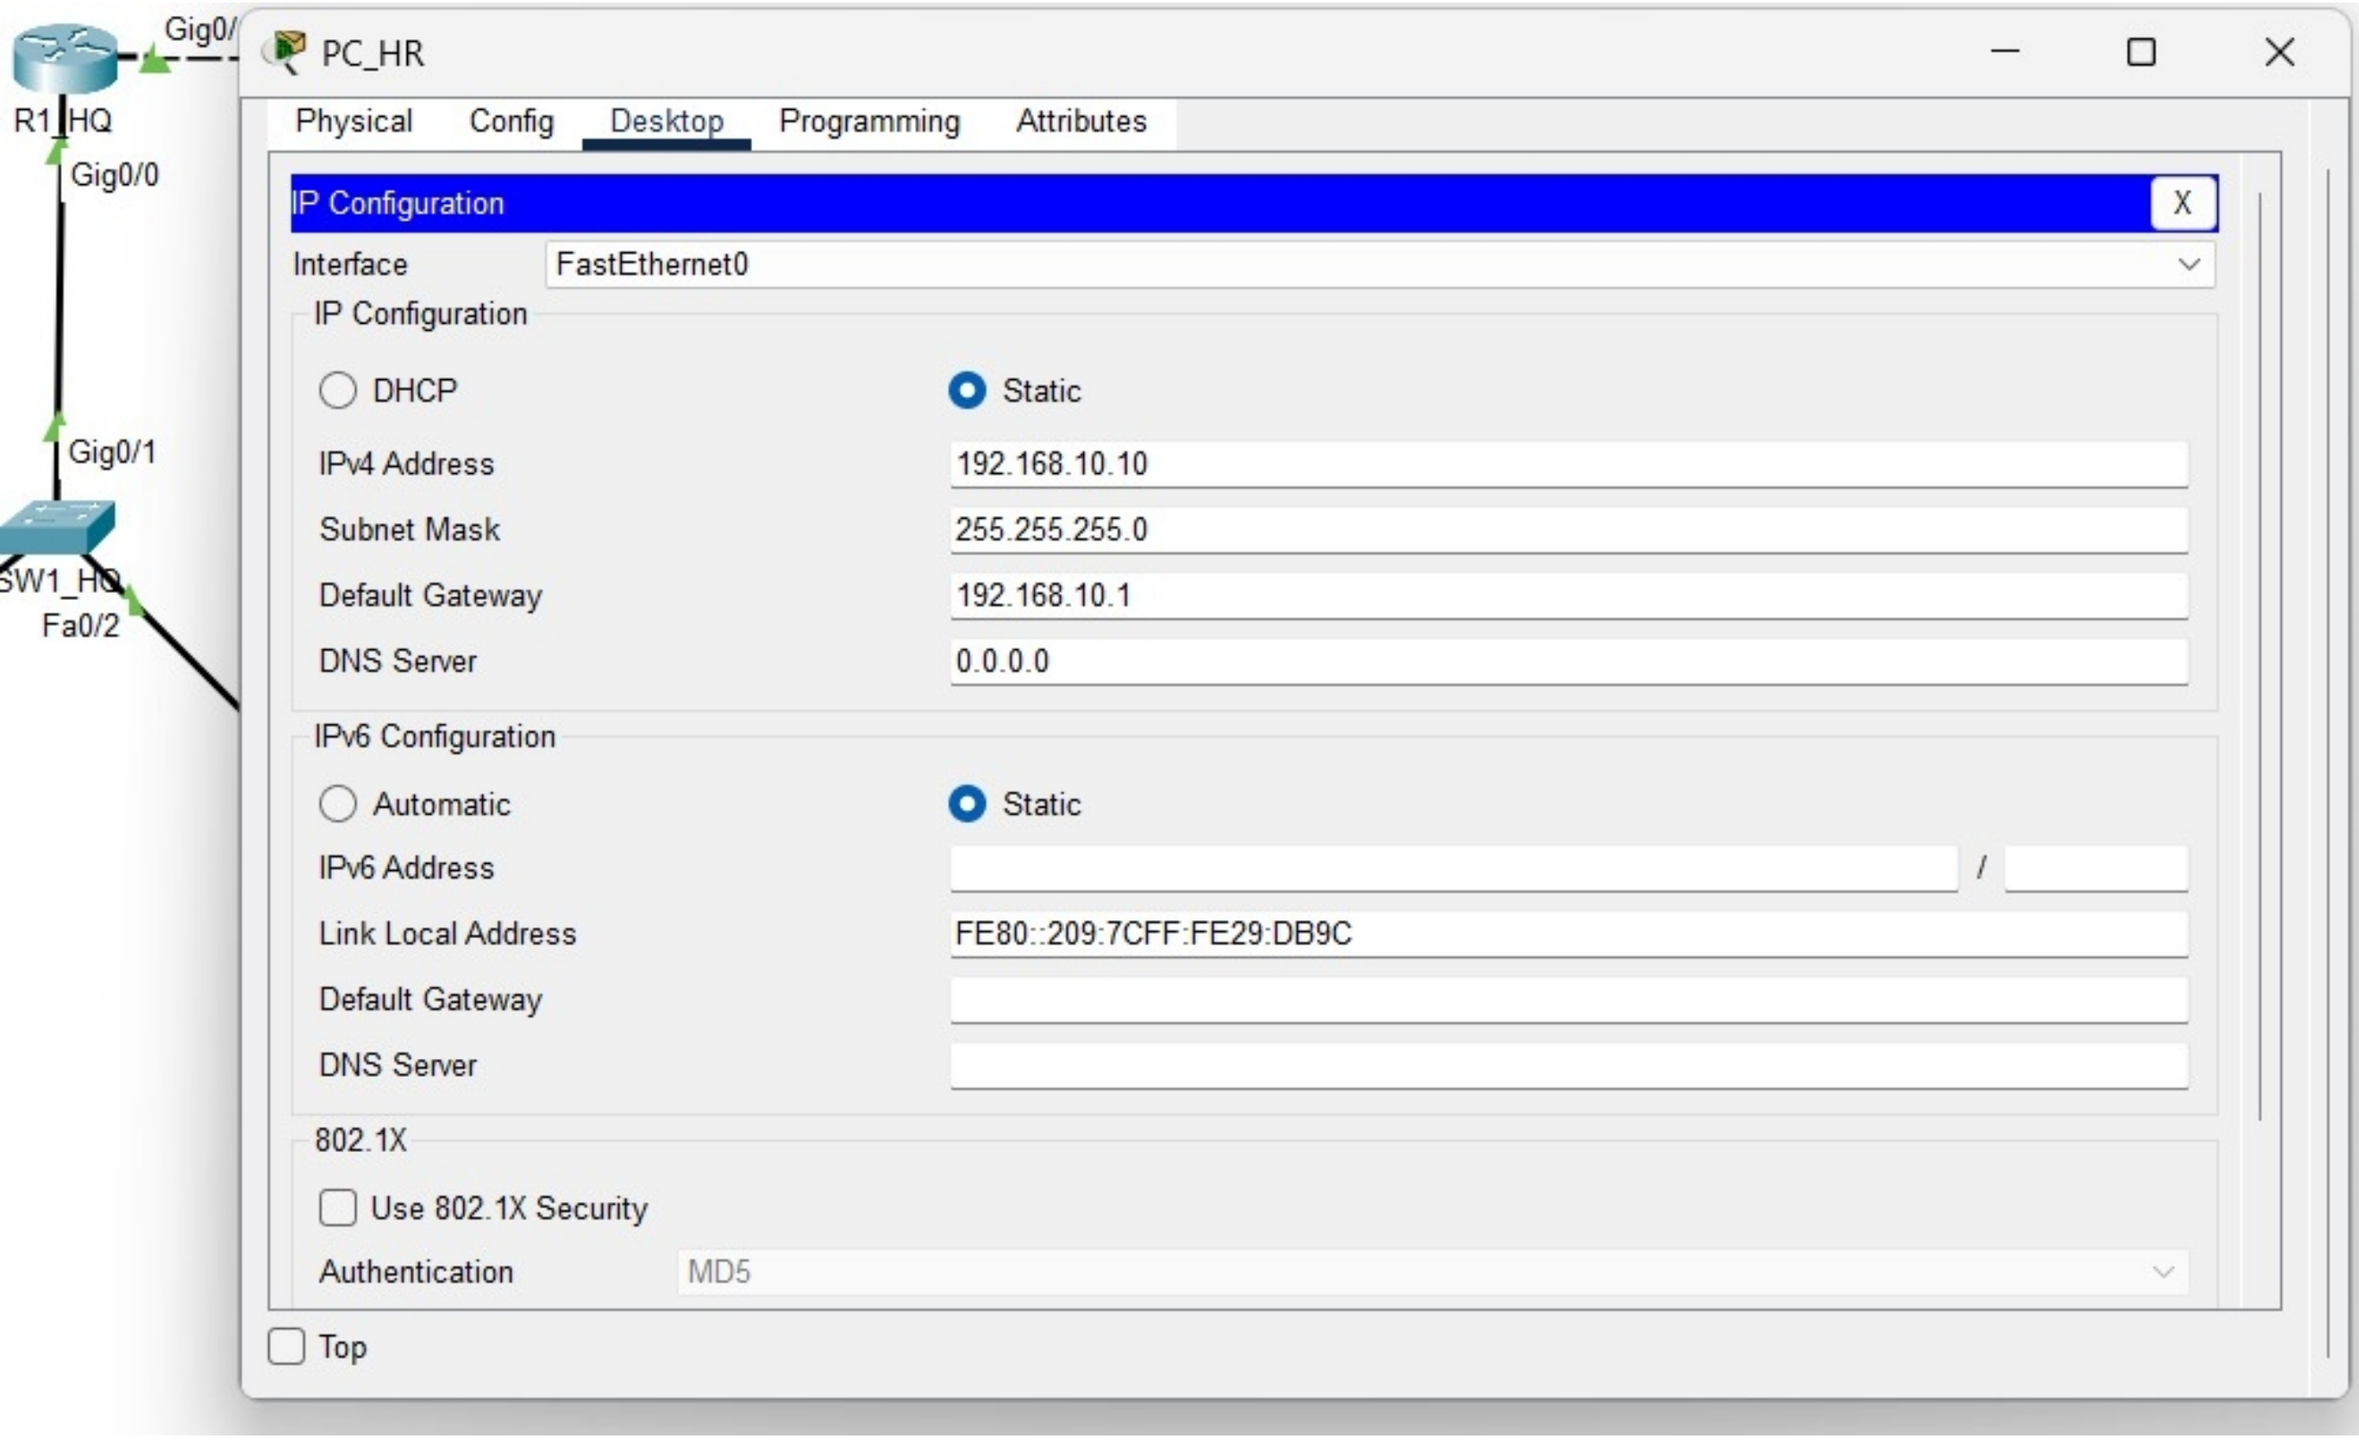
Gig0/
R1_HQ
Gig0/0
Gig0/1
SW1_HQ
Fa0/2
PC_HR
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.10.10
Subnet Mask
255.255.255.0
Default Gateway
192.168.10.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::209:7CFF:FE29:DB9C
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Top

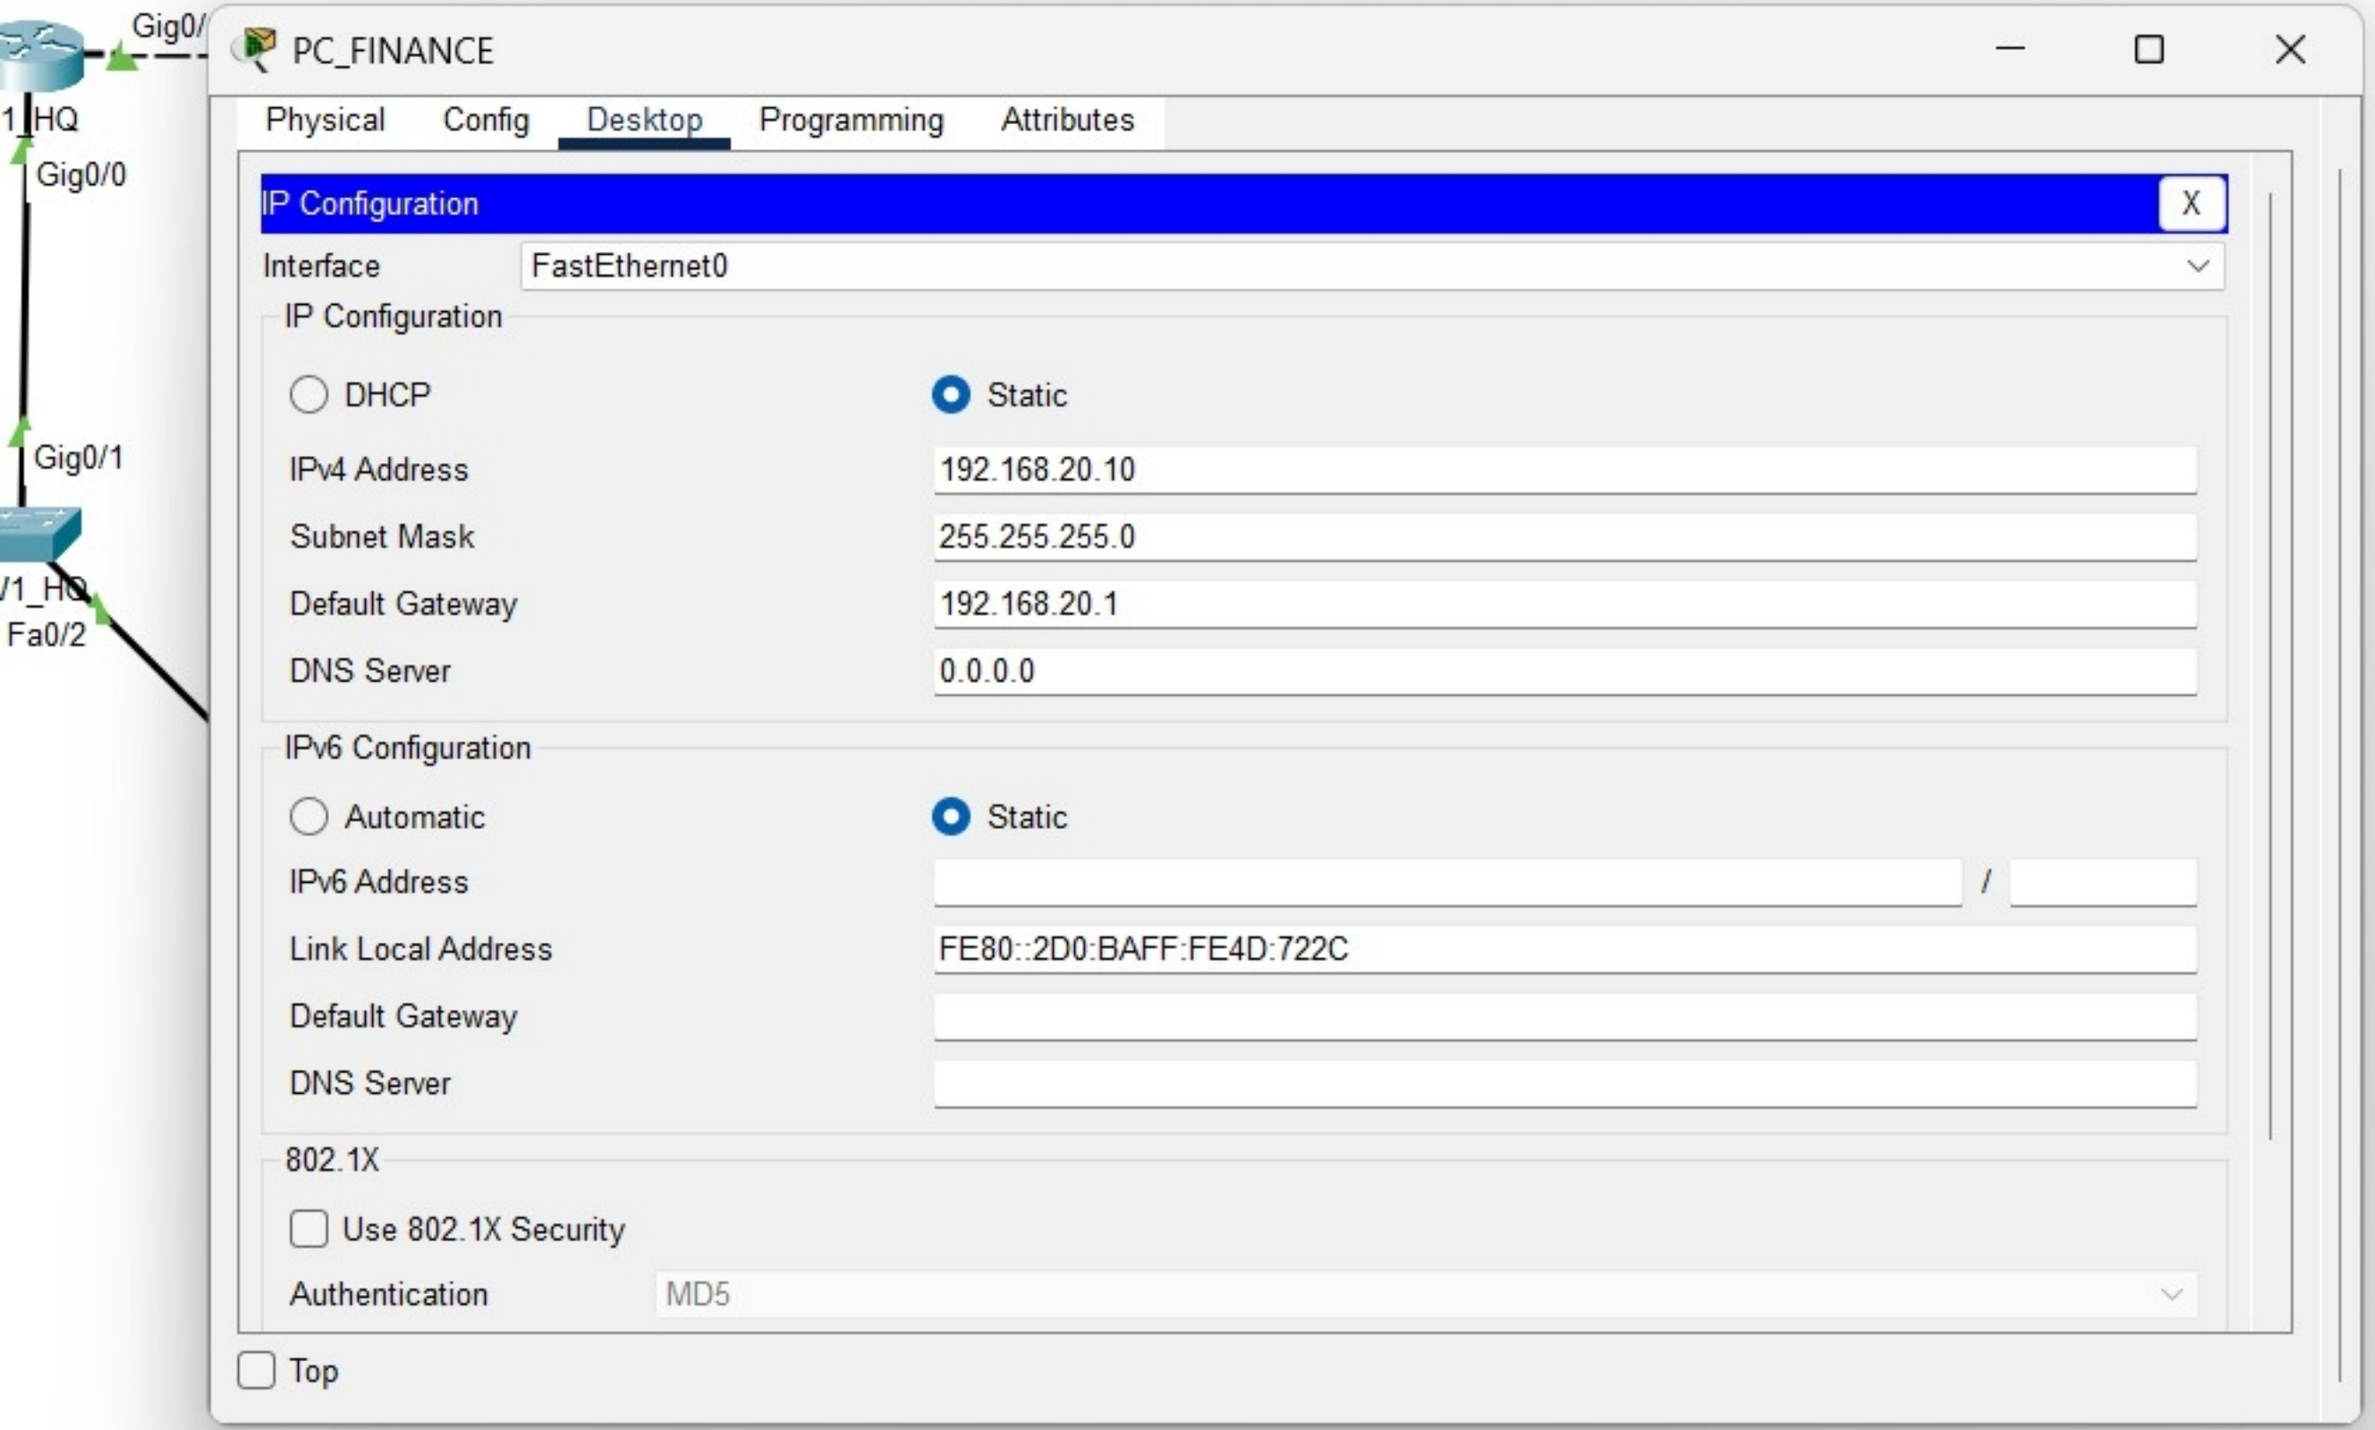
Gig0/
1_HQ
Gig0/0
Gig0/1
/1_HQ
Fa0/2
PC_FINANCE
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.20.10
Subnet Mask
255.255.255.0
Default Gateway
192.168.20.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::2D0:BAFF:FE4D:722C
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Top

```
Pinging 192.168.20.10 with 32 bytes of data:

Reply from 192.168.20.10: bytes=32 time<1ms TTL=126
Reply from 192.168.20.10: bytes=32 time<1ms TTL=126
Reply from 192.168.20.10: bytes=32 time<1ms TTL=126
Reply from 192.168.20.10: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.20.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

PC_FINANCE

Physical | Config | Desktop | Programming | Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.10

Pinging 192.168.10.10 with 32 bytes of data:

Reply from 192.168.10.10: bytes=32 time<1ms TTL=126
Reply from 192.168.10.10: bytes=32 time<1ms TTL=126
Reply from 192.168.10.10: bytes=32 time<1ms TTL=126
Reply from 192.168.10.10: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

R1_HQ

Physical Config CLI Attributes

IOS Command Line Interface

```
R1_HQ#show running config
                    ^
% Invalid input detected at '^' marker.

R1_HQ#show running-config
Building configuration...

Current configuration : 764 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname R1_HQ
!
!
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
!
!
license udi pid CISCO2911/K9 sn FTX1524II40-
!
!
!
!
!
!
!
!
!
```

Copy Paste

Top

30°C Partly sunny

Search

ENG IN

17:50 31-10-2026

R1_HQ

Physical Config CLI Attributes

IOS Command Line Interface

```
!
!
!
spanning-tree mode pvst
!
!
!
!
!
!
interface GigabitEthernet0/0
 ip address 192.168.10.1 255.255.255.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 10.0.0.1 255.255.255.252
 duplex auto
 speed auto
!
interface GigabitEthernet0/2
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip classless
ip route 192.168.20.0 255.255.255.0 10.0.0.2
!
ip flow-export version 9
!
!
!
!
!
```

Copy Paste

Top

30°C
Partly sunny
Search
ENG
IN
17:50
31-10-2026

R1_HQ

Physical Config CLI Attributes

IOS Command Line Interface

```
 speed auto
!
interface GigabitEthernet0/1
 ip address 10.0.0.1 255.255.255.252
 duplex auto
 speed auto
!
interface GigabitEthernet0/2
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip classless
ip route 192.168.20.0 255.255.255.0 10.0.0.2
!
ip flow-export version 9
!
!
!
!
!
!
!
line con 0
!
line aux 0
!
line vty 0 4
 login
!
!
!
end
```

Copy Paste

Top

30°C
Partly sunny

Search

ENG
IN

17:51
31-10-2026

R2_BRANCH

Physical Config CLI Attributes

IOS Command Line Interface

```
R2_BRANCH#show running-config
Building configuration...

Current configuration : 766 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname R2_BRANCH
!
!
!
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
!
!
license udi pid CISCO2911/K9 sn FTX1524PVID-
!
!
!
!
!
!
!
!
!
!
!
!
!
```

Copy Paste

Top

(Select a Device to Drag and Drop to the Workspace)

30°C
Partly sunny
Search
ENG
IN
17:54
31-10-2026

R2_BRANCH

Physical Config CLI Attributes

IOS Command Line Interface

```
spanning-tree mode pvst
!
!
!
!
!
!
interface GigabitEthernet0/0
 ip address 192.168.20.1 255.255.255.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 10.0.0.2 255.255.255.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/2
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip classless
ip route 192.168.10.0 255.255.255.0 10.0.0.1
!
ip flow-export version 9
!
!
!
!
!
!
!
line con 0
```

Copy Paste

Top

30°C
Partly sunny
Search
ENG
IN
17:54
31-10-2026



R2_BRANCH

Physical Config CLI Attributes

IOS Command Line Interface

```
R2_BRANCH>show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS
inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/24 is directly connected, GigabitEthernet0/1
L       10.0.0.2/32 is directly connected, GigabitEthernet0/1
S    192.168.10.0/24 [1/0] via 10.0.0.1
     192.168.20.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.20.0/24 is directly connected, GigabitEthernet0/0
L       192.168.20.1/32 is directly connected, GigabitEthernet0/0
```

Copy Paste

Top



R1_HQ

Physical Config CLI Attributes

IOS Command Line Interface


```
R1_HQ>show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS
inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/30 is directly connected, GigabitEthernet0/1
L       10.0.0.1/32 is directly connected, GigabitEthernet0/1
     192.168.10.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.10.0/24 is directly connected, GigabitEthernet0/0
L       192.168.10.1/32 is directly connected, GigabitEthernet0/0
S    192.168.20.0/24 [1/0] via 10.0.0.2
```

Copy Paste

Top

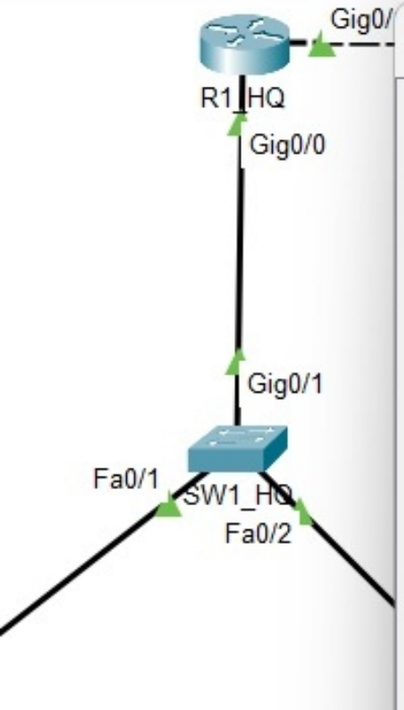

R2_BRANCH

Physical Config CLI Attributes

IOS Command Line Interface


```
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0,
changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1,
changed state to up


R2_BRANCH>show ip interface brief
Interface              IP-Address      OK? Method Status
Protocol
GigabitEthernet0/0     192.168.20.1    YES manual up
up
GigabitEthernet0/1     10.0.0.2        YES manual up
up
GigabitEthernet0/2     unassigned      YES unset  administratively down
down
Vlan1                  unassigned      YES unset  administratively down
down
R2_BRANCH>
```

Copy Paste

Top

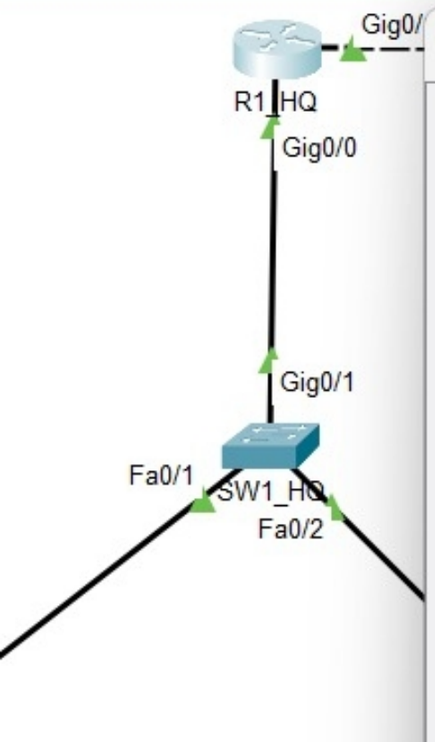

R1_HQ

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1,
changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0,
changed state to up


R1_HQ>show ip interface brief
Interface              IP-Address      OK? Method Status
Protocol
GigabitEthernet0/0     192.168.10.1    YES manual up
up
GigabitEthernet0/1     10.0.0.1        YES manual up
up
GigabitEthernet0/2     unassigned      YES unset  administratively down
down
Vlan1                  unassigned      YES unset  administratively down
down
R1_HQ>
```


Copy Paste

Top

Cisco Packet Tracer - C:\Users\Asus\Desktop\Mayureshxp[Networking_Portfolio]\Project_2_Operation_BranchLink.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x: 722, y: 273 Root 01:28:00

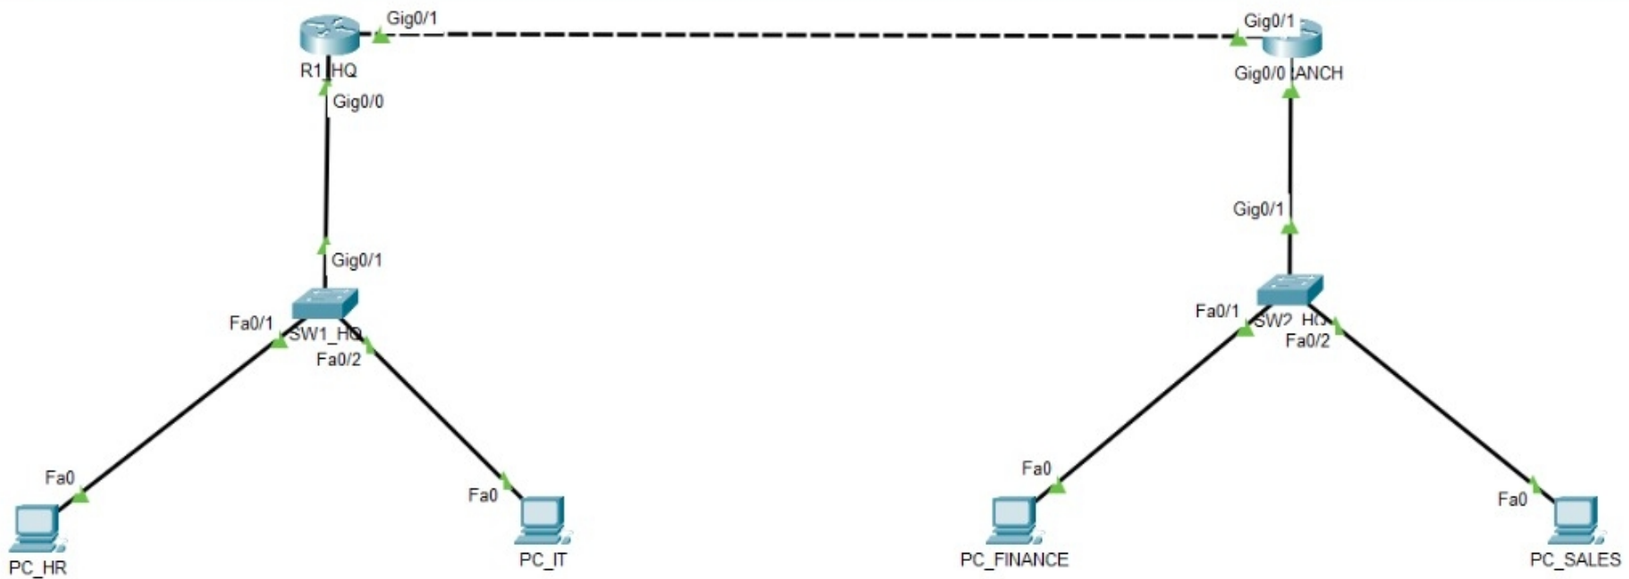

Time: 00:02:56 Realtime Simulation

PT8200 4331 4321 IR8340 1941 2901 2911 819IOX 819HGW 829 1240

Search for device

Scenario 0

New Delete

Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete

30°C Partly sunny

Search

ENG IN

17:32 31-10-2026