

Silquest^{*} A-Link^{*} 597 Silane

adhesion promoter for hotmelt adhesives

Product Description

Silquest A-Link 597 silane functions as an adhesion promoter for a variety of substrate/matrix resin combinations. It is especially useful in high performance hot melt adhesives and other applications where exposure to sustained temperatures might occur.

Key Features and Typical Benefits

- Improved adhesion to difficult substrates such as plastics, glass and metals including aluminum and steel
- Thermal stability at 200°C
- High boiling point, low volatility for better silane retention in hot melt adhesive application conditions
- Compatible with most hotmelt resins

Structural Feature	System Benefit
High concentration of trimethoxy silyl groups	Provides effective adhesion to a variety of substrates.
Isocyanurate chemistry	Polar structure provides good solubility in most resins, good wetting of most substrates, imparts thermal resistance and low volatility to the adhesion promoter.

Momentive Performance Materials provides versatile materials as the starting point for our creative approach to ideas that help enable new developments across hundreds of industrial and consumer applications. We are helping customers

solve product, process, and performance problems; our silanes, fluids, elastomers, sealants, resins, adhesives, urethane additives, and other specialty products are delivering innovation in everything from car engines to biomedical devices.

From helping to develop safer tires and keeping electronics cooler, to improving the feel of lipstick and ensuring the reliability of adhesives, our technologies and enabling solutions are at the frontline of innovation.




Silquest* A-Link* 597 Silane adhesion promoter for hotmelt adhesives

Typical Physical Properties

Appearance	Clear liquid
Specific Gravity at 25/25°C	1.170
Viscosity, cSt	95
Flash Point, Pensky-Martens Closed Cup, ASTM D93, °C (°F)	102 (216)
Boiling Point at 0.05mm Hg, °C	230

Chemical Structure

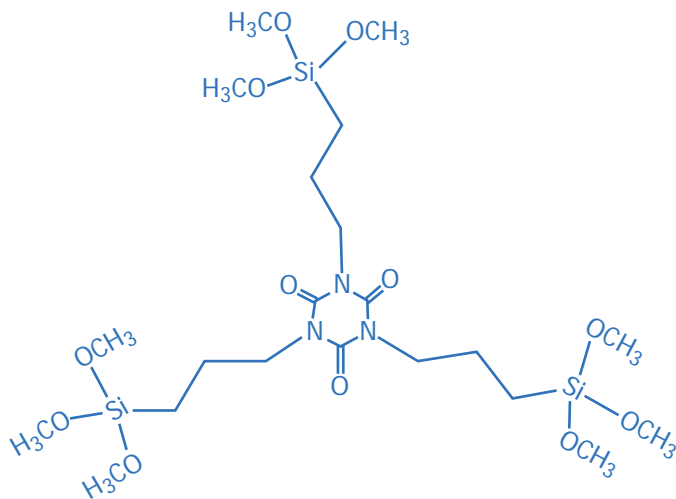

Tris(3-(trimethoxysilyl)propyl)isocyanurate (Mol. Wt. 616)
Silquest A-Link 597 silane

Applications

Silquest A-Link 597 silane demonstrates excellent adhesion promoter properties when evaluated in SPUR+* prepolymer-based sealants and in commercial hot melt adhesives.

Silquest A-Link 597 Silane Adhesion Promoter in SPUR+ Prepolymer and Sealants:




Illustrative of its effectiveness in SPUR+ prepolymer sealants is shown by first the preparation of SPUR+ prepolymers based on either a 4,000 or 8,000 molecular weight, low monol content polypropylene diol using IPDI. The NCO/OH ratio was 1.5 and 15 ppm dibutyltin dilaurate used as catalyst per a previously reported procedure. These prepolymers were capped with Silquest A-Link 15 then formulated into low filler SPUR+ prepolymer sealant formulation:

Sealant Formulation

Ingredients	Weight (g)
SPUR+ prepolymer	250
Plasticizer	100
Moisture Scavenger (Silquest A-171* silane)	3.75
Calcium Carbonate	250
UV Stabilizers	5
Thixotropic Agent	15
TiO ₂	7.5
Silane Adhesion Promoter	3,75
Catalyst (Fomrez** SUL-4)	0.16

**Formrez is a trademark of Crompton Corporation

For comparison a number of silanes were added as the silane

Commercial Name	Structure
Silquest* A-1170 silane	HN[ Si(OCH ₃) ₃] ₂
Silquest A-1100* silane	NH ₂  Si(OCH ₂ CH ₃) ₃
Silquest A-Link 597 silane	

Silquest* A-Link* 597 Silane adhesion promoter for hotmelt adhesives

Applications (continued)

The impact of each silane on SPUR* prepolymer-based sealant properties was evaluated using ASTM specifications. Tensile strength, elongation, modulus (ASTM D 412), shore A (ASTM C 661) and tear resistance (ASTM D 624) data were obtained on samples cured according to the following schedule: 1 week at 50°C (122°F) 85% relative humidity, 1 week at 25°C (73°F) 50% relative humidity, 1 week at 50°C (122°F) 85% relative humidity.

Silquest A-Link 597 has a low basicity and dispersed alkoxy groups relative to other adhesion promoters, which results in sealants displaying excellent elastomeric properties.

Mechanical Properties of Various Adhesion Promoters in SPUR⁺ Prepolymer Sealants Silane

Silane	Tensile Strength psi (mPa)	Young's Modulus psi (mPa)	Elongation %	Tear lb/in (N/mm)	Shore A
SPUR ⁺ Sealant Based on an 4,000 Molecular Weight, Low Monol Content Polypropylene Diol					
Silquest A-1170 silane	144 (0.99)	342 (2.36)	69	16.8 (2.94)	43
Silquest A-1100* silane	225 (1.55)	300 (2.07)	128	19.5 (3.42)	45
Silquest A-Link 597 silane	191 (1.32)	242 (1.67)	158	22.9 (4.01)	39
SPUR ⁺ Sealant Based on an 8,000 Molecular Weight, Low Monol Content Polypropylene Diol					
Silquest A-1170 silane	198 (1.37)	209 (1.44)	199	23.8 (4.17)	36
Silquest A-1100 silane	214 (1.48)	177 (1.27)	204	28.1 (4.92)	35
Silquest A-Link 597 silane	225 (1.55)	141 (0.97)	365	34.8 (6.09)	30


Applications (continued)

SPUR+* prepolymer sealant adhesion-in-peel testing from aluminum and glass in accordance with the ASTM C 794 procedure was evaluated. Curing was per above protocol for the physical properties testing followed by water immersion for 1 week then dried by paper towel prior to testing. In Figure 1 (at right) Silquest A-Link 597 added to the SPUR+ prepolymer based on an 8,000 molecular weight, low monol content polypropylene diol, clearly exhibits improved adhesion to difficult substrates without sacrificing the flexibility of sealants as do aminosilane adhesion promoters.

Silquest A-Link 597 Silane Adhesion Promoter in Commercial Hot Melt Adhesives:

The low volatility and excellent oxidative stability of Silquest A-Link 597 silane also makes it ideally suited for hot melt adhesive applications where improved adhesion is desired. To determine what effect Silquest A-Link 597 silane has on the typical physical properties of hot melt adhesives (HMA) blends of several commercial HMAs, EVA hot melt adhesive and polyamide adhesive as shown in the table following. HMA physical properties were evaluated for the formulations shown in the table below. These were cured by water soaking for two weeks at room temperature followed by conditioning 24 hours at 50°C prior to testing. Physical property results revealed that Silquest A-Link 597 silane may affect some physical properties specific to HMA type. For example the polyamide adhesive HMA showed increased tensile, modulus and elongation properties while the EVA hot melt adhesive did not. These findings were typical for the other high temperature HMAs tested (polyolefins, polyester) and indicated that A-Link 597 silane might affect physical properties and this factor should be considered in the specific application.

Figure 1: Adhesion-in-Peel Test

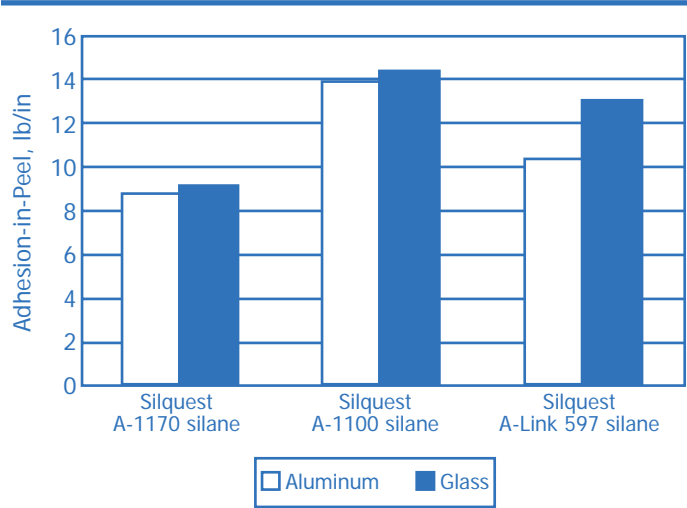

Physical Properties of Commercial Hot Melt Adhesives with Silquest A-Link 597 Silane Adhesion Promoter

	Tensile psi (mPa)	100% Modulus psi (mPa)	Elongation %	Tear lbs/in (N/mm)
EVA Hot Melt Adhesive				
0%	469 (3.23)	468 (3.23)	96	198 (34.7)
0.50%	435 (3.00)	434 (3.00)	93	168 (24.4)
1.00%	597 (4.12)	591 (4.07)	88	204 (35.7)
1.50%	476 (3.28)	476 (3.28)	95	184 (32.2)
Polyamide Adhesive				
0%	473 (3.26)	380 (2.62)	56	240 (42.0)
0.50%	434 (3.00)	434 (3.00)	45	210 (36.8)
1.00%	705 (4.86)	–	62	263 (46.1)
1.50%	679 (4.68)	753 (5.19)	60	269 (47.1)

Applications (continued)

Improved adhesion of these commercial HMAs with Silquest A-Link 597 was further evaluated by lap shear testing using various substrates. Samples were prepared with 0.5 inch x 1 inch overlap and 0.125 inch of adhesive thickness. Typical results are shown below. As in the SPUR+* prepolymer-based sealant case, Silquest A-Link 597 demonstrated effective adhesion promoter results. Optimum level was found to be dependent on the hot melt adhesive type, i.e. polyester, polyamide, EVA etc and should be evaluated on the specific HMA to be used.

Figure 2: Polyamide HMA


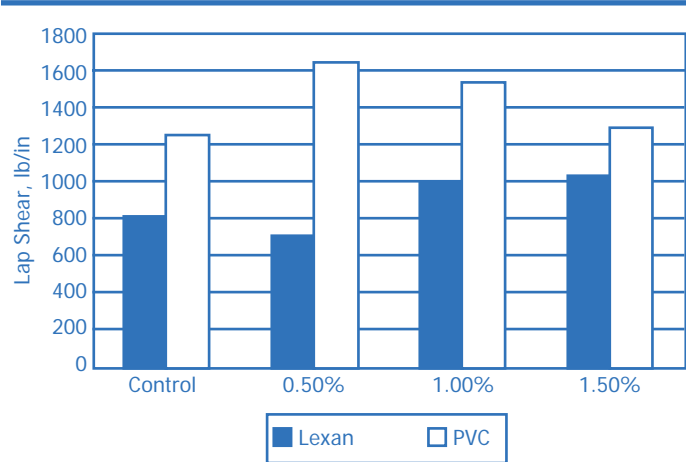



Figure 3: Polyester HMA

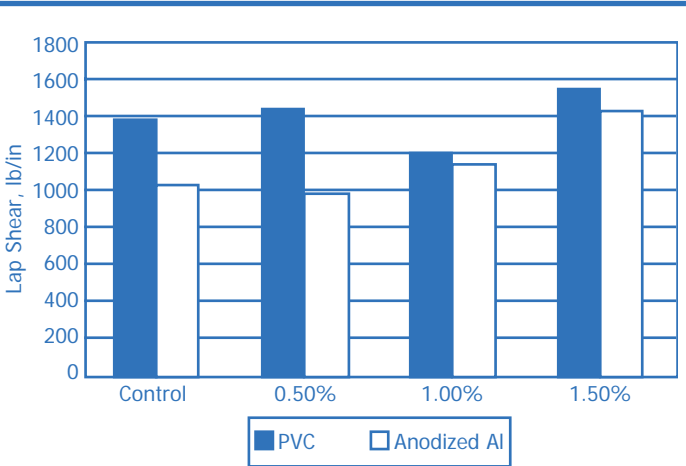

Applications (continued)

Silquest A-Link 597 demonstrates enhanced adhesion as demonstrated for the EVA hot melt shown below. Further evaluation using a blended A-Link 597 with A-1100* at a 4/1-weight ratio blend enhanced lap shear adhesion. Such a blend can affect both mechanical and hot melt properties (viscosity, color, open time) therefore a thorough evaluation should be done prior to use.

Figure 4: EVA HMA

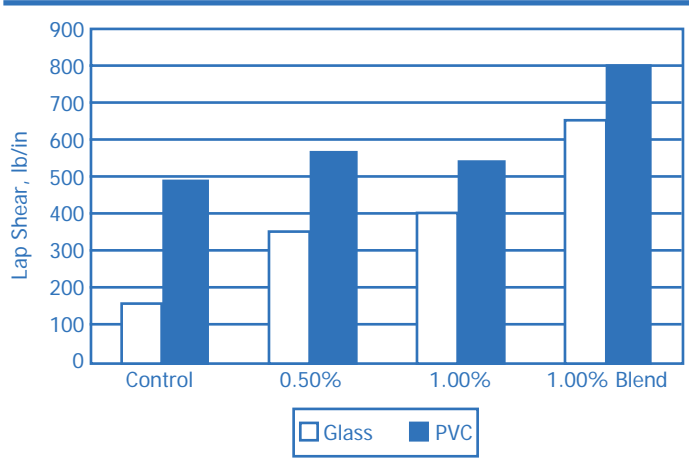

Silquest A-Link 597 silane has a characteristic low volatility and oxidative stability that makes it well suited as an adhesion promoter in both SPUR** prepolymer-based sealants and higher temperature applications such as hot melt adhesives.

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers considering the use of this product should review the latest Material Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage conditions required. Material Safety Data Sheets are available at www.momentive.com or, upon request, from any Momentive Performance Materials representative. Use of other materials in conjunction with Momentive Performance Materials products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

Emergency Service

Momentive Performance Materials maintains an around-the-clock emergency service for its products. The American Chemistry Council (CHEMTREC), Transport Canada (CANUTEC), and the Chemical Emergency Agency Service also maintain an around-the-clock emergency service for all chemical products:

Location	Momentive Performance Materials Products	All Chemical Products
Mainland U.S., Puerto Rico	518.233.2500	CHEMTREC: 800.424.9300
Alaska, Hawaii	518.233.2500	CHEMTREC: 800.424.9300
Canada	518.233.2500	CANUTEC: 613.996.6666 (collect) or CHEMTREC: 800.424.9300
Europe, Middle East, Africa	+32.(0)14.58.45.45 (Belgium)	CHEMTREC: +1-703.527.3887 (collect)
Latin America, Asia/Pacific, all other locations worldwide	+518.233.2500	CHEMTREC: +1-703.527.3887 (collect)
At sea	Radio U.S. Coast Guard, which can directly contact Momentive Performance Materials at 518.233.2500 or CHEMTREC at 800.424.9300.	

DO NOT WAIT. Phone if in doubt. You will be referred to a specialist for advice.

Principal Locations

Regional Information	Phone	Fax
North America World Headquarters 187 Danbury Road Wilton, CT 06897, USA	800.295.2392	607.754.7517
Latin America Rodovia Eng. Constâncio Cintra, Km 78,5 Itatiba, SP – 13255-700 Brazil	+ 55.11.4534.9650	+ 55.11.4534.9660
Europe, Middle East, Africa and India Leverkusen Germany	00.800.4321.1000 + 31.164.293.276	+ 31.164.241750
Pacific Akasaka Park Building 5-2-20 Akasaka Minato-ku, Tokyo 107-6112 Japan	+ 81.3.5544.3100	+ 81.3.5544.3101
Customer Service Centers		
North America Charleston, WV 25314, USA E-mail: cs-na.silicones@momentive.com	Specialty Fluids 800.523.5862	304.746.1654
	UA, Silanes, Resins, and Specialties 800.334.4674	304.746.1623
	RTV Products-Elastomers 800.332.3390	304.746.1623
	Sealants and Adhesives and Construction 877.943.7325	304.746.1654
Latin America Argentina and Chile Brazil Mexico and Central America Venezuela, Ecuador, Peru, Colombia, and Caribbean E-mail: cs-la.silicones@momentive.com	+ 54.11.4862.9544 + 55.11.4534.9650 + 52.55.5899.5135 + 58.212.285.2149	+ 54.11.4862.9544 + 55.11.4534.9660 + 52.55.5899.5138 + 58.212.285.2149
Europe, Middle East, Africa and India E-mail: cs-eur.silicones@momentive.com	00.800.4321.1000 + 31.164.293.276	+ 31.164.241750
Pacific E-mail: cs-ap.silicones@momentive.com Japan China Korea Singapore	+ 81.276.20.6182 + 86.21.5050.4666 (ext. 1523) + 82.2.6201.4600 + 65.6220.7022	
Worldwide Hotline Worldwide Web	800.295.2392 + 607.786.8131 www.momentive.com	+ 607.786.8309

THE MATERIALS, PRODUCTS AND SERVICES OF THE BUSINESSES MAKING UP MOMENTIVE PERFORMANCE MATERIALS INC., ITS SUBSIDIARIES AND AFFILIATES, ARE SOLD SUBJECT TO MOMENTIVE PERFORMANCE MATERIALS INC.'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, MOMENTIVE PERFORMANCE MATERIALS INC. MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN MOMENTIVE PERFORMANCE MATERIALS INC. STANDARD CONDITIONS OF SALE, MOMENTIVE PERFORMANCE MATERIALS INC. BUSINESS AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Momentive Performance Materials Inc.'s materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Momentive Performance Materials Inc.'s products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Momentive Performance Materials Inc.'s Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Momentive Performance Materials. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Momentive Performance Materials Inc. or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.