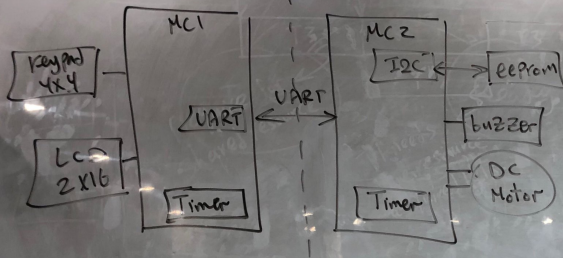


HMI-ECU

F=8MHz

Control-ECU

Door Locker security system

①

Please enter Pass:

Then enter.

Please re-enter same Pass:

Then enter.

Match → Save Pass. inside eeprom.
→ goto step ②.

Mismatch → repeat step ①

Door Locker security system

②

Main Options

+ : open door
- : change Password


③

+ open door

please enter Pass:

then enter.

Match → rotates motor for 1S-sec. CW
→ hold motor for 3-seconds.
→ rotates motor for 1S-seconds A-CW

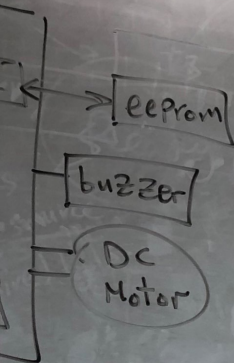

Door Locker security system

②

Main options

+ : open door

- : change Password

④


- change Password

please enter Pass:

* * * * *

then enter.

Match → repeat step ①

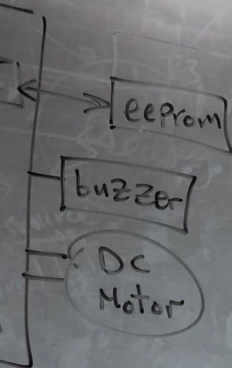

Door Locker security system

②

Main options

- + : open door
- : change Password

⑤

+ on

please enter Pass.:

then enter.

Mis Match for 3 times

- activate buzzer for 1-minute.
- error Message on Screen.
- go to step ②

