

	ADBD lab Test Report	R024588	PAXAR Bangladesh Ltd. A subsidiary of Avery Dennison Corporation Plot#167-169, Dhaka-EPZ-Ext. Area Savar, Dhaka-1349, Bangladesh
Doc.Update date:	8/6/2024	Revision No.	50.3
Sample received date	16-May-2026	Report update Date	17-May-2026
Order informations details: The following samples is identified on behalf of the customer as:			
RBO	TOMMY JOHN	Customer name	DIVINE INTIMATES LTD / FOUR H FASHION LTD
Item Number	TJ_HTL_WHT	SO +Line	138115809+2.1
Customer P.O Number	DIL-TB-25-03379/Shihab	Fabric Color	Phalaenopsis-500316
Fabric composition	93% MODAL 7% ELASTANE	Print Quality	AG
Bonding date	5/16/2026	Bonding side	Inside of the Fabric
Bonding parameters setting details			
Temperature (° C)	150	Peel method	Hot
Line Pressure	4.97	Silicon type	soft
Applied Pressure(kg/cm ²)	2	Fabric attached	Yes
Dwell time	10	Need to Use Stream	No
Silicon size	6.5x7.5	Bonded by	Lovelu Mia
Bonding machine model	Green tech 2015	If model no is changed then may need to changed bonding parameters.	
Bonding comments	Shinny mark		
NB: Applied Pressure calculation =	3.14 X Piston radius ² (cm ²) X air pressure kg/cm ² into cylinder		
	Platen size cm ² (Lenght *Width)		
Tracking No	TR-21308	Folder no	
Appearance after Washing AATCC 135 Pass- All Ok- Go Bulk			
AATCC 61 2A modified Pass- All Ok- Go Bulk			
Lab comment			
Approved By		Mohammad Delwar Hossan	
			
"Avery Dennison RBIS is committed to providing quality product services on time and inconformance to requirements for customer satisfaction at all times.Additionally it is prohibited the undue influence oever third party laboratories from employees to alter test methods ot test result that serve as th ebasis for certifying a products compliance under federal law of every site location. Achievement of this objectives requires us to establish and maintain an effective quality system that aims at superior preformance, while conforming to all product safety, environment and legal requirement.we review quality improvment as a continous process abd will provide training and create an environment for employees to conform to standards and customer requirements. we will also aim at building long-term partnership with our customers and suppliers."			

Standard: Appearance after Washing AATCC 135 , washing temp: 30°C, No. of Washing Cycles:10 cycles, Washing Duration per cycle:40 mins,Washing Machine: Domestic washing machine, Detergent: AATCC 1993 66 +/- 1 gm , Load Weight: Ballast Material of 92 x 92 cm with 1.8 kg, Drying: Tumble dry low(medium), Dry and wash cycle: 1 dry after 1 wash, Wash program: Normal.


Assessment criteria:

1. No cracking	☐	3. Peeling off from the base fabric	☐
2. Delamination	☐	4. Observation	☐

UNTESTED SAMPLE



TESTED SAMPLE

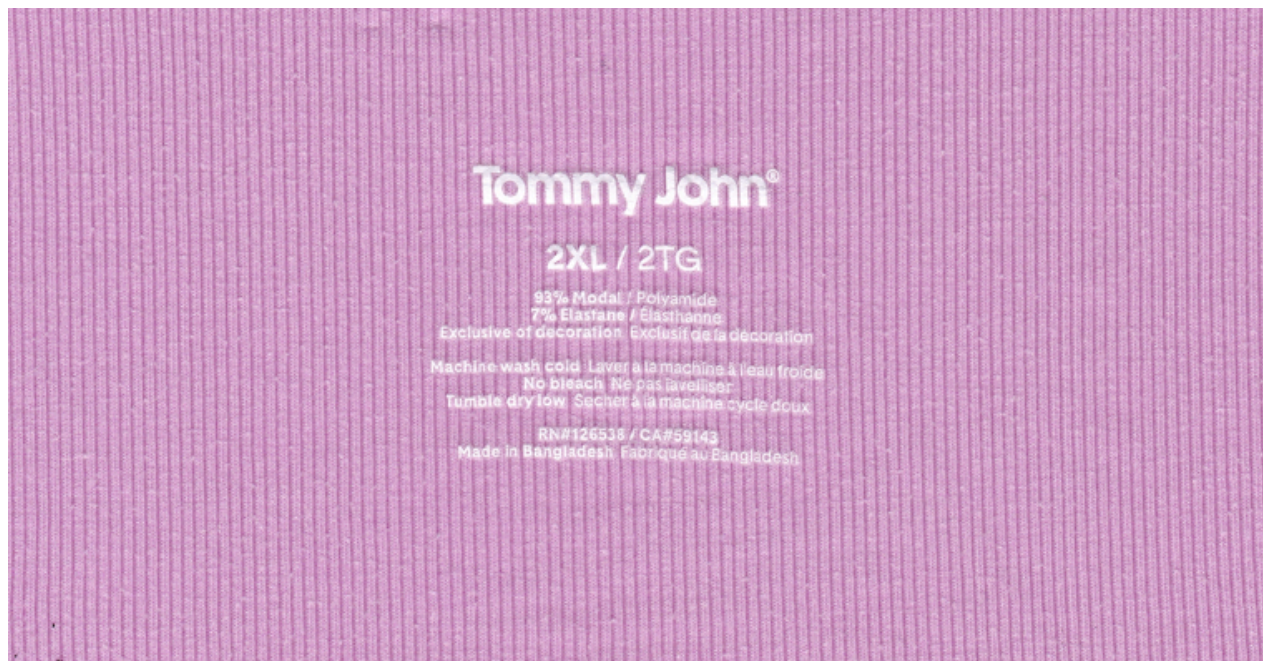

Standard: AATCC 61 2A modified , washing temp: 31°C, No. of Washing Cycles:2 cycle, Washing Duration per cycle: 45 mins,Washing Machine: Laundrometer, Detergent: 150ml, 0.15% AATCC 1993 WOB , Steel Ball: 50, Load Weight: N/A, Drying: Oven (temp not exceeding 60 °C), Dry and wash cycles: 1 dry after 1 wash.Multifabric: Yes.

Assessment criteria:

Gray Scale of Passing Grade of Colour Change	Color staining: 4.0 MIN
Gray Scale of Passing Grade of Colour Stain	Self staining: 4.5 MIN

Color assessment

Accetate	4.5	Cotton	4.5
Nylon	4.5	Polyester	4.5
Acrylic	4.5	Wool	4.5
Color change grade: 4.0	Achieved grade	4.5	

TESTED SAMPLE- AATCCA 61 2A



REPORT END