

PAXAR Bangladesh Ltd. A subsidiary of Avery Dennison Corporation Plot#167-169, Dhaka-EPZ-Ext. Area Savar, Dhaka-1349, Bangladesh	BD LAB Test Report	DHK26P057		
Order informations details: The following samples is identified on behalf of the customer				
Sample received date	19-May-2026	Report update Date	21-May-2026	
Sample description(Item code)	AW-005328-001-014-22-02	Sample description(Item Color)	N/A	
Fabric Composition	70% VISCOSE , 30% Recycle Cotton	Fabric content: Fabric colour	Ligh Pink	
T1 name and Fabric Mill	PUMA	SO +Line	S4228887-1	
Print Quality	AGILITY	Bonding side	Face side	
Customer PO	N/A			
Bonding parameters setting details				
Temperature (° C)	150	Dwell Time (Second)	10	
Applied Pressure(kg/cm²)	1.5	Peel Method	Cold	
Bonding Remark:	Carrier mark & Shinny mark			
NB: Applied Pressure calculation =	$3.14 \times \text{Piston radius}^2 (\text{cm}^2) \times \text{air pressure kg/cm}^2 \text{ into cylinder}$ $\text{Platen size cm}^2 (\text{Lenght} \times \text{Width})$			
Tracking No	HT57	Folder no		
Test items and Results				
Test Description	Test Standard	Test Result	Comments	
Oven Migration Test	(PCF12, JIS L0854:2013 Modified)	Pass		
Print Durability Test – Appearance after washing/drying	(PT65, ISO 5077/ ISO 3759/ ISO 6330/ ISO 16322-1/-2/-3 + ISO 16322-2 Amd. 1 modified)	Pass		
Print Hand Stretch Test	(Puma F-01-PT66 Puma Method)	Pass		
Note:NA = Not Applicable, Result: Refer to next pages				
Approved By		MOHAMMAD DELWAR HOSSAN		
				

Address:Paxar Bangladesh Ltd | Avery Dennison (RBIS) 167-169, DEPZ, Savar, Dhaka-1349, Bangladesh


"Avery Dennison RBIS is committed to providing quality product services on time and inconformance to requirements for customer satisfaction at all times.Additionally it is prohibited the undue influence oever third party laboratories from employees to alter test methods ot test result that serve as th ebasis for certifying a products compliance under federal law of every site location.
Achievement of this objectives requires us to establish and maintain an effective quality system that aims at superior preformance, while conforming to all product safety, environment and legal requirement.we review quality improvment as a continous process abd will provide training and create an environment for employees to conform to standards and customer requirements. we will also aim at building long-term partnership with our customers and suppliers."

PAXAR Bangladesh Ltd. A subsidiary of Avery Dennison Corporation Plot#167-169, Dhaka-EPZ-Ext. Area Savar, Dhaka-1349, Bangladesh	BD LAB Test Report	DHK26P057		
Test item: . Oven Migration Test (PCF12, JIS L0854:2013 Modified)				
Test condition	Test conditions: Sample was placed into the drying cabinet at 90 °C for 24hours			
Description	Result	Requirement		
Control Sample (Bonding Test)		N/A		
Colour Change (body & print)	4-5	Min. 4-5		
Colour Staining onto polyester (body & print)	5	Min. 4-5		
Cross staining (dk to Lt.)	5	Min. 4-5		
Remarks: Grey Scale Rating is based on the 5-step scale of 1 to 5, where 1 is bad and 5 is good. Applicable on white/light print color over 100% polyester / □50% polyester blended fabric base				
Conclusion	Pass	☒	Fail	☐
Test item: Print Durability Test – Appearance after washing/drying				
Test condition	ISO 3759:2011 / ISO 5077:2007 / Modified ISO 6330:2021 Procedure No.4N; Using Wascator, Machine wash at 40 degree C with 2 kg total dry mass (type III (100% polyester) ballast + specimen) and 'ECE' reference detergent 98 without optical brightener,tumble dry less than 60 degree C).			
After 1 wash	Result	Requirment		
1. Colour change of fabric	4-5	4-5		
2. Colour change of print	4-5	4-5		
3. Appearance after washing	Description	Result	Requirment	
3.1	Removal appearance of prints	No Romoval	No Romoval	
3.2	Peeling off appearance of prints	No peeling off	No peeling off	
3.3	Cracking off appearance of prints	No Cracking	No Cracking	
3.4	Wrinkled appearance of prints	No Wrinkle	No Wrinkle	
Conclusion	Pass	☒	Fail	☐
Test item: Print Durability Test – Appearance after washing/drying				
Test condition	ISO 3759:2011 / ISO 5077:2007 / Modified ISO 6330:2021 Procedure No.4N; Using Wascator, Machine wash at 40 degree C with 2 kg total dry mass (type III (100% polyester) ballast + specimen) and 'ECE' reference detergent 98 without optical brightener,tumble dry less than 60 degree C).			
After 5 wash	Result	Requirment		
1. Colour change of fabric	4-5	4-5		
2. Colour change of print	4-5	4-5		
3. Appearance after washing	Description	Result	Requirment	
3.1	Removal appearance of prints	No Romoval	No Romoval	
3.2	Peeling off appearance of prints	No peeling off	No peeling off	
3.3	Cracking off appearance of prints	No Cracking	No Cracking	
3.4	Wrinkled appearance of prints	No Wrinkle	No Wrinkle	
Conclusion	Pass	☒	Fail	☐

PAXAR Bangladesh Ltd. A subsidiary of Avery Dennison Corporation Plot#167-169, Dhaka-EPZ-Ext. Area Savar, Dhaka-1349, Bangladesh		BD LAB Test Report		DHK26P057					
Test item: Print Durability Test – Appearance after washing/drying									
Test condition		ISO 3759:2011 / ISO 5077:2007 / Modified ISO 6330:2021 Procedure No.4N; Using Wascator, Machine wash at 40 degree C with 2 kg total dry mass (type III (100% polyester) ballast + specimen) and 'ECE' reference detergent 98 without optical brightener, tumble dry less than 60 degree C).							
After 10 washes				Result			Requirement		
1. Colour change of fabric				4-5			4-5		
2. Colour change of print				4-5			4-5		
3. Appearance after washing		Description		Result			Requirement		
3.1		Removal appearance of prints		No Removal			No Removal		
3.2		Peeling off appearance of prints		No peeling off			No peeling off		
3.3		Cracking off appearance of prints		No Cracking			No Cracking		
3.4		Wrinkled appearance of prints		No Wrinkle			No Wrinkle		
Conclusion		Pass		☒		Fail		☐	
Test item: Print Hand Stretch Test									
Test condition		Print Hand Stretch Test (PT66, Puma Method)							
Observation Items		Immediate		Result			Requirement		
Same visual appearance				No Change			Print must retain same visual appearance		
No crack when stretching				No crack observed			No crack when stretching		
For non-elastic pigment prints lines must not be visible after relaxation				No Change			For non-elastic pigment prints lines must not be visible after relaxation		
Solid bond for all edges and corners				No Change			Solid bond of all edges and corners		
No peel off				No peel off			No peel off		
Observation Items		Evaluation After 10 minutes relaxation		Result			Requirement		
Same visual appearance				No Change			Print must retain same visual appearance		
No crack when stretching				No crack observed			No crack when stretching		
For non-elastic pigment prints lines must not be visible after relaxation				No Change			For non-elastic pigment prints lines must not be visible after		
Solid bond for all edges and corners				No Change			Solid bond of all edges and corners		
No peel off				No peel off			No peel off		
Conclusion		Pass		☒		Fail		☐	

Appendix

Control sample image:

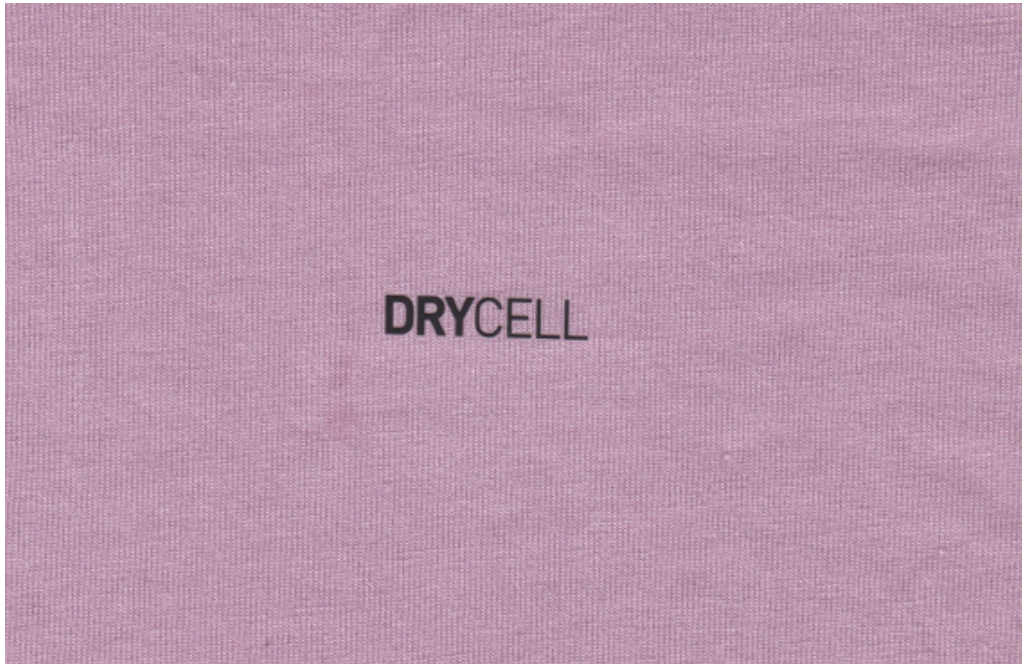

Appendix

Print Durability Test – Appearance after washing/drying



Oven Migration Test



Appendix

Print Hand Stretch Test



REPORT END