

**START HERE**

Write the card. Plug it in. Add your printers.

Everything is on the image: Bambuddy, the updater, the admin panel. Writing the card takes about ten minutes, and setting it up takes another five.

1	What you need	page 2
2	Get the image	page 3
3	Write the card	page 4
4	Before you begin	page 5
5	Power on	page 6
6	The setup wizard	page 7
7	The wizard, screen by screen	page 8
8	Set your password	page 10
9	The network switch	page 11
10	Bambuddy, and your first printer	page 12
11	Everyday things	page 13
12	The appliance's own page	page 14
13	Extra IPs, and reaching it from anywhere	page 16
14	Updates and backups	page 17
15	If something goes wrong	page 18
16	Getting help	page 19

WHAT YOU NEED

You supply the computer; we supply everything that runs on it. Four parts from any Raspberry Pi dealer, plus a case you print yourself.

PART	WHAT TO BUY
Computer	Raspberry Pi 5 — 4 GB, or 8 GB for a large fleet
Power supply	The official Raspberry Pi 27 W USB-C supply
Cooling	The official Raspberry Pi Active Cooler
Memory card	microSD, 64 GB minimum , endurance-rated
Case	Print it yourself, and hold the Pi in it with 4 × M2.5 × 5 screws and 4 × M2.5 nuts . Free 3MF: bambuddy.cool/appliance.html

You will also want a card reader and a computer to write from. Nothing else — no monitor, no keyboard, not even an ethernet cable.

A Pi 5, not a Pi 4

The appliance keeps two copies of its operating system, so an update that goes wrong falls back to the one that worked. That layout needs the Pi 5's bootloader. On a Pi 4 the card may simply never start, with nothing on screen to explain why.

The official power supply and cooler

An underpowered Pi does not announce itself — it drops printer connections and corrupts the card, months later. The Active Cooler matters for the same reason: this box runs every hour of every day, and a throttled Pi looks exactly like slow software.

Why 64 GB is a floor rather than a suggestion

The two operating-system copies and their boot partitions claim 21 GB before anything of yours is stored, so the appliance refuses to start on a 32 GB card. A 64 GB one leaves around 38 GB for prints, models and history. Buy an endurance-rated card — they are made for this kind of constant writing.

GET THE IMAGE

1 Download it, and check that it arrived whole

Your purchase includes the image and its updates: for a year with Personal, for as long as the appliance is developed with Lifetime, and while subscribed with Business. The download link is in your purchase email.

Two files arrive together: the image itself, whose name ends in `.img.xz`, and a short SHA256SUMS beside it.

Do not unpack the `.img.xz`

Raspberry Pi Imager reads the compressed file as it is. Unpacking it first costs you time and about 22 GB of disk, and gains you nothing.

Verify the download

A card written from a half-finished download boots to nothing in particular, and the failure looks like a hardware fault. One command rules it out. Run it in the folder holding both files.

```
# macOS and Linux
shasum -a 256 -c SHA256SUMS
```

```
# Windows, in PowerShell
Get-FileHash *.img.xz -Algorithm SHA256
```

On macOS and Linux you are looking for the word **OK**. On Windows, compare the hash it prints with the one inside SHA256SUMS — they should match character for character.

If it doesn't match

Download it again rather than trying to use it. A mismatch means the file is incomplete or corrupted, and neither Imager nor the Pi will tell you that is what went wrong — you will spend the evening suspecting the card.

Keep the file

It is around 1.2 GB and it is the same file every time. Writing a second card, or starting over after a bad experiment, is then a five-minute job instead of another download.

WRITE THE CARD

2 Seven screens in Raspberry Pi Imager

Free, official, and available for Windows, macOS and Linux at

raspberrypi.com/software . Put the card in your reader before you start.

1

Device — choose Raspberry Pi 5

This only filters the list on the next screen. It does not change what gets written.

2

Operating system — scroll to the very bottom

Use **custom** is the last entry, below **Erase**. Almost everyone scrolls past it.

3

Pick the .img.xz you downloaded

Select the compressed file itself. Imager handles the rest.

4

Storage — choose your card

It shows the size and where the card is mounted. Read it before you continue.

5

Write, then confirm the erase warning

Imager asks once, in red, and it means it. Everything on the card goes.

6

Let it verify

It writes, then reads the card back to check every byte. There is a button offering to skip this. Don't.

7

Write complete

The card is ejected for you. Take it out and put it in the Pi.

Customisation stays greyed out. That is correct.

Imager skips its own settings screen for a custom image, so it jumps straight from Storage to writing. Hostname, WiFi, password and time zone all belong to the appliance's own setup wizard — which you meet on page 7.

Check the storage device twice

Imager hides internal drives by default, but an external disk plugged into the same computer will appear in that list looking much like a card reader. The confirmation is the last thing standing between you and the wrong drive.

BEFORE YOU BEGIN

Two of these live on your printer, not on the appliance. Get them ready now and the rest takes minutes.

On your printer

- ☐ **Storage, inserted — if your model takes any**
A microSD card on the X1 and P1 series; a USB stick on the H2 series. The A1 and A1 Mini have storage built in and need nothing. Without somewhere to put a file, a printer that takes storage cannot receive one.

- ☐ **LAN Only Mode, on**
On the printer's touchscreen: Settings > Network.

- ☐ **Developer Mode, on**
It appears once LAN Only Mode is on. Without it, Bambuddy can watch your printer but not control it.

- ☐ **Write down the Access Code**
Eight characters, shown when you switch Developer Mode on. Also note the printer's **IP address** and **serial number**.

The access code changes

Every time you toggle LAN Only or Developer Mode off and on again, your printer generates a new access code. If Bambuddy stops connecting later, this is usually why.

Where to find all three

The **IP address** and **serial number** are on the printer's own screen, under Settings > Network and Settings > Device respectively. The **access code** appears the moment you switch Developer Mode on. Write down all three now and page 12 takes a minute.

POWER ON

3 Connect power, and wait

Screw the Pi into its case if you printed one, put the card in, and plug in the power supply. The first boot takes a couple of minutes while Bambuddy is unpacked from the card. Then pick whichever describes you.

An ethernet cable, if you have one

Not included, and not required — but plugging one in **before** you power on is simpler, faster, and skips the trickiest part of setup entirely.

With an ethernet cable

The appliance joins your network by itself. Open a browser on any computer or phone on that network and go to:

`http://bambuddy.local:8000`

Without ethernet

The appliance starts its own WiFi network so you can talk to it. Join it from a phone or laptop:

Bambuddy-Setup

Give it two to three minutes to appear.

The appliance waits to see whether an ethernet cable turns up, then scans for nearby networks, before starting its own. Refresh your WiFi list.

The setup page usually opens by itself. If not, go to

`http://bambuddy.local:8000`

If the name doesn't work

`bambuddy.local` relies on a discovery service some networks and browsers don't support. Find the appliance's IP address in your router's list of connected devices and use `http://<that-address>:8000` instead. It works the same.

Why the wizard pauses on its first screen

It waits for the clock. A Raspberry Pi has no battery to keep time while unplugged, and a wrong clock breaks every secure connection it needs to make. A few seconds, once.

THE SETUP WIZARD

4 Answer five questions

The wizard shows you one screen at a time. On ethernet, the WiFi screen is skipped — you are already connected.

SCREEN	WHAT IT ASKS
Welcome	Nothing. Press continue.
Connect to your WiFi	Pick your home network and enter its password. Skipped on ethernet.
Configure your appliance	Three settings — see below.
Your licence key	The key from your purchase email. Can be skipped — see below.
Set a password	Required, and the one that matters — see page 10.

"Configure your appliance" asks for three things

Device name. Becomes the address you type into your browser. Call it *workshop* and it answers at `http://workshop.local:8000` . Lowercase letters, digits and hyphens.

Time zone. So your print history has the right timestamps.

Language. For Bambuddy's interface. All three are changeable later, from Bambuddy's settings.


Your licence key

Twenty characters in four groups, in your purchase email; dashes and capitals do not matter. It is what lets the appliance fetch its updates — Bambuddy itself runs either way, which is why the screen offers **Skip for now**. Skip it and the appliance's own page carries an **Enter a key** notice until you add one.

THE WIZARD, SCREEN BY SCREEN

What the screens look like. On ethernet, the WiFi one is skipped.

Connect to your WiFi

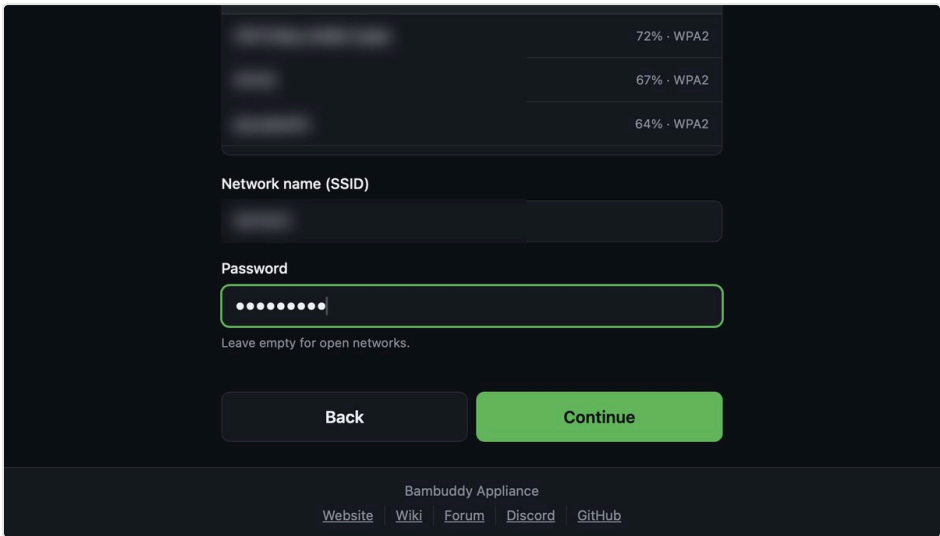

The screenshot shows a dark-themed interface for connecting to a WiFi network. At the top, there is a list of three nearby networks, each with a signal strength indicator and the security type 'WPA2'. Below this list, there are two input fields: 'Network name (SSID)' and 'Password'. The password field is currently filled with ten dots. A small text note below the password field says 'Leave empty for open networks.' At the bottom of the form, there are two buttons: 'Back' and 'Continue'. The footer of the screen displays the 'Bambuddyy Appliance' logo and a row of links: 'Website', 'Wiki', 'Forum', 'Discord', and 'GitHub'.

Signal Strength	Security
72%	WPA2
67%	WPA2
64%	WPA2

Network name (SSID)

Password

Leave empty for open networks.


Back Continue

Bambuddyy Appliance

[Website](#) [Wiki](#) [Forum](#) [Discord](#) [GitHub](#)

Nearby networks, strongest first. Pick yours and type its password.

Configure your appliance

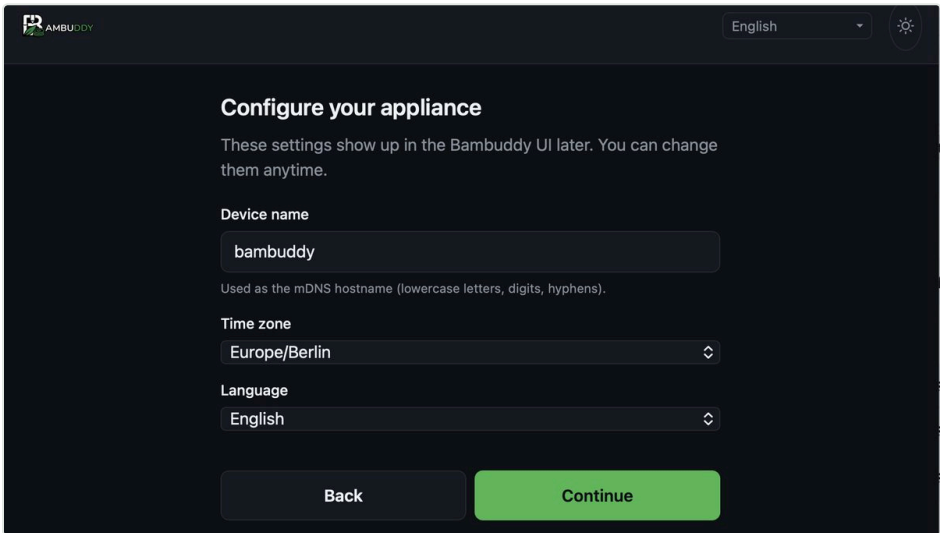

The screenshot shows a dark-themed interface for configuring the appliance. At the top left is the 'BAMBUDDY' logo. At the top right, there is a language dropdown menu set to 'English' and a settings gear icon. The main heading is 'Configure your appliance', followed by a subtext: 'These settings show up in the Bambuddyy UI later. You can change them anytime.' Below this, there are three configuration sections: 'Device name' with a text input field containing 'bambuddyy' and a note 'Used as the mDNS hostname (lowercase letters, digits, hyphens).'; 'Time zone' with a dropdown menu set to 'Europe/Berlin'; and 'Language' with a dropdown menu set to 'English'. At the bottom, there are 'Back' and 'Continue' buttons.

Configure your appliance

These settings show up in the Bambuddyy UI later. You can change them anytime.

Device name

bambuddyy

Used as the mDNS hostname (lowercase letters, digits, hyphens).

Time zone

Europe/Berlin

Language


English

Back Continue

Device name, time zone and language — all three changeable later, from Bambuddyy's settings.

THE WIZARD, SCREEN BY SCREEN


Your licence key

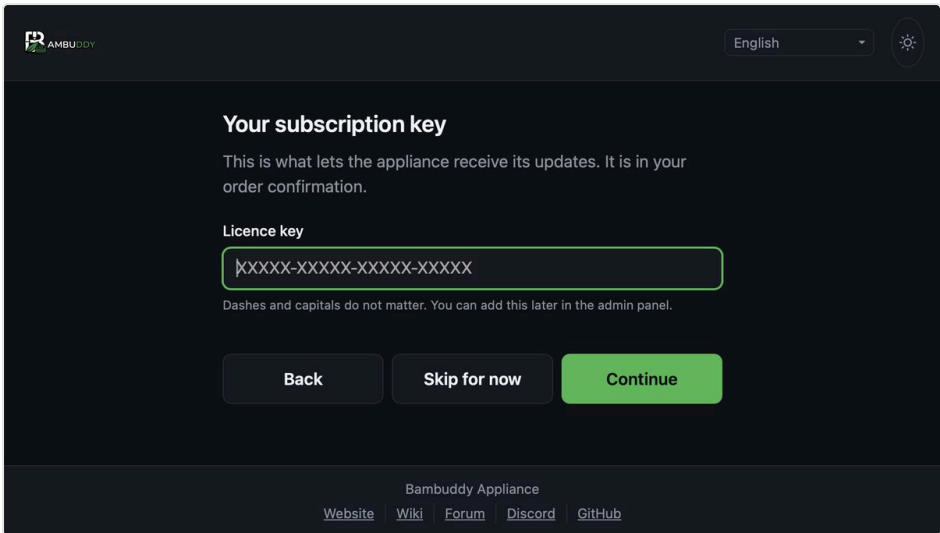

The screenshot shows a dark-themed web interface for the 'Bambudddy' appliance. At the top left is the 'BAMBUDDDY' logo. At the top right, there is a language dropdown menu set to 'English' and a settings icon. The main heading is 'Your subscription key'. Below it, a paragraph explains that this key allows the appliance to receive updates. A text input field labeled 'Licence key' contains the placeholder text 'XXXXX-XXXXX-XXXXX-XXXXX'. Below the input field, a note states: 'Dashes and capitals do not matter. You can add this later in the admin panel.' At the bottom, there are three buttons: 'Back', 'Skip for now', and 'Continue'. The 'Continue' button is highlighted in green. A footer bar contains the text 'Bambudddy Appliance' and links to 'Website', 'Wiki', 'Forum', 'Discord', and 'GitHub'.

Skip for now is a real option: the appliance runs without a key and simply receives no updates until one is entered.

Set a password

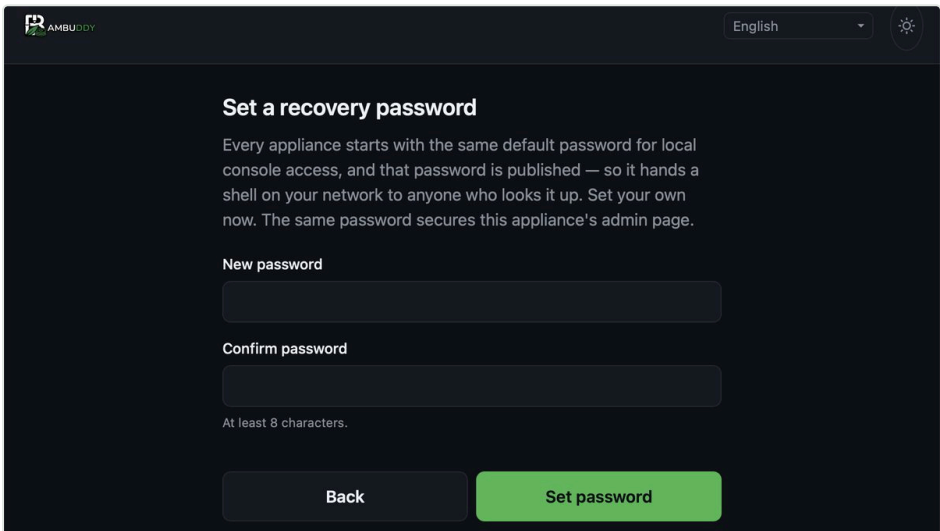

The screenshot shows a dark-themed web interface for the 'Bambudddy' appliance. At the top left is the 'BAMBUDDDY' logo. At the top right, there is a language dropdown menu set to 'English' and a settings icon. The main heading is 'Set a recovery password'. Below it, a paragraph explains that every appliance starts with a default password for local console access, and that this password is published on the network. It instructs the user to set their own password now, as the same password secures the admin page. There are two text input fields: 'New password' and 'Confirm password'. Below the 'Confirm password' field, a note states: 'At least 8 characters.' At the bottom, there are two buttons: 'Back' and 'Set password'. The 'Set password' button is highlighted in green.

The one screen you cannot pass without answering. What it replaces, and what it unlocks, is on page 10.

SET YOUR PASSWORD

5 Give the appliance a password of your own

The last screen of the wizard, and the one that matters most. It is also the only one you cannot move past without answering.

There is no way past this screen, on purpose

On its first boot the appliance gave itself a password of its own, printed in `bambuddy-password.txt` on the card. Yours replaces it. Either way, one password unlocks three separate things:

- the appliance's admin page, as user **admin**
- the local console
- **SSH — a remote shell, reachable from every device on your network**

Typing a new password here replaces it in all three at once, and deletes the file from the card. Setup cannot be completed until you do. Eight characters minimum.

You can change it later at any time, from a terminal:

```
$ sudo bambuddy-appliance set-admin-password
```

Put it somewhere you will find it again

There is no "forgot password" link and no email to send one to — the appliance has no account with us and no way to reach you. A password manager, or wherever you keep your router's password.

If you forget it

The factory reset on page 13 clears this password along with your Bambuddy data, and the wizard that comes back asks you to set a new one. So a forgotten appliance password costs you your print history, but never the card.

THE NETWORK SWITCH

This is the only confusing part, and only if you set up over WiFi. Read it before you press the button.

6 Hand the appliance over to your network

If you set up over WiFi

1

Press "Apply and switch networks"

The appliance shows its progress: loading Bambuddy, joining your WiFi, starting up.

2

The Bambuddy-Setup network disappears

This is meant to happen. The appliance has stopped being a WiFi hotspot and joined your network instead.

3

Your phone goes quiet — reconnect it to your normal WiFi

It will not do this on its own. Nothing is broken.

4

Open the address the wizard showed you

Usually `http://bambuddy.local:8000`. Give it thirty to sixty seconds.

If you set up over ethernet

Press **Start Bambuddy**, wait thirty to sixty seconds, and open the address shown. Your network never changes, so nothing disconnects.

Mistyped the WiFi password?

The appliance notices it cannot join, and brings **Bambuddy-Setup** back. Rejoin that network, and the wizard is waiting where you left it. Try again.

BAMBUDDY, AND YOUR FIRST PRINTER

7 Set up Bambuddy

The first time Bambuddy opens, it asks how you want to sign in. Create an account with a username and password, or choose to run without one on a trusted home network. You can change your mind later.

This account is **Bambuddy's**, and is separate from the appliance password you set in the wizard. They are different doors.

8 Add your printer

Go to the **Printers** page and press **Add Printer**. You need the three things you wrote down on page 5:

FIELD	WHERE IT COMES FROM
Name	Whatever you like — "Workshop X1C"
IP address	Your printer's screen, or your router
Access code	Eight characters, from Developer Mode
Serial number	Your printer's screen

Press save. The indicator turns green when the printer is connected, and temperatures start updating on their own.

Not turning green?

Nine times out of ten it is the access code — check it hasn't changed — or Developer Mode being off. Both live on the printer's touchscreen, not in Bambuddy.

EVERYDAY THINGS

Where everything lives

ADDRESS	WHAT YOU'LL FIND
<code>bambuddy.local:8000</code>	Bambuddy — your printers, queue and history
<code>bambuddy.local:8001</code>	The appliance's own admin page: health, logs, updates, network
<code>ssh pi@bambuddy.local</code>	A shell, for recovery

The admin page manages the **box**. Bambuddy's settings live inside Bambuddy. They are deliberately separate, so you can still fix the box when Bambuddy itself is down.

Factory reset

On the admin page, open **Dashboard** and press **Factory reset** — or run

`sudo bambuddy-appliance factory-reset` over SSH. Your data is erased and the setup wizard returns. Use it when Bambuddy's own page is unreachable, when you've forgotten your Bambuddy account, or before passing the appliance on to someone else.

It clears the appliance password from page 10 as well, so the wizard that returns asks you to set a new one. To change it without wiping anything, use the command on that page.

No undo

Two confirmations and your print history is gone. It is the last resort, not the first. Download a backup before you press it (page 17).

THE APPLIANCE'S OWN PAGE

Port 8001, user **admin**, your password.

Dashboard

DashboardNetworkUpdatesDiagnosticsSupport

Health

CPU temperature47.7 °C

Power/thermalOK

Uptime1h 14m

Services

bambuddyrunning

bambuddy-dbrunning

bambuddyactive

dockeractive

Storage & memory

/2.6 GiB / 9.8 GiB (26.5%)

/var/lib/bambuddy3.8 GiB / 37.8 GiB (10.1%)

Memory827.5 MiB / 4.0 GiB

Network

Hostnamebambuddy

mDNSbambuddy.local

IP192.168.255.170,

addresses172.17.0.1, 172.18.0.1

Hardware

Memory4.0 GiB

Boot medium63.9 GB

BoardRaspberry Pi 5 Model B Rev 1.1

Power supply5000 mA

Power stabilityOK

CoolingPresent

Subscription

StatusActive

Updates until14 October 2027

Days remaining371

Versions

OSDebian GNU/Linux 13 (trixie)

Appliance1.0.14

Bambuddy imageghcr.io/maziggy/bambuddy:daily

Health, storage, the hardware it found, and your licence: its edition and how long updates run. Below: reboot, Bambuddy Backup and factory reset.

Network

DashboardNetworkUpdatesDiagnosticsSupport

LAN connection

Connection

Interfacewlan0

Addresses192.168.255.170/24

Secondary IP aliases

Extra IPs on the LAN interface — one per virtual printer that needs its own address. Added alongside the primary DHCP address; the primary configuration is not changed here.

No aliases configured.

New alias

192.168.1.50/24

Add alias

The addresses it answers on, plus the secondary IP aliases and remote access from page 16.

The appliance's own page

14

THE APPLIANCE'S OWN PAGE

Updates

Dashboard

Network

Updates

Diagnostics

Support

Bambuddy

Current image

ghcr.io/mazlggy/bambuddy:daily

Check for updates

Target tag

e.g. v0.2.5.0

Upgrade Bambuddy

The container is health-checked after the swap and rolled back automatically if it fails to come up. Your data is untouched.

Operating system

OS

Debian GNU/Linux 13 (trixie)

Install OS updates

Applies all pending Debian package updates. There is no automatic rollback — a bad update may require re-flashing the SD card. A reboot may be required afterwards.

The two lanes from page 17, each with its own button and a log you can watch. Nothing installs itself.

Diagnostics

Dashboard

Network

Updates

Diagnostics

Support

Service log

Bambuddy (container)

Refresh

Download support bundle

2026-10-07T10:00:10.249841915Z 2026-10-07 12:00:10,248 INFO [backend.app.api.routes.websocket] [-] WebSocket client disconnected normally

2026-10-07T10:00:10.353981359Z 2026-10-07 12:00:10,353 INFO [backend.app.api.routes.websocket] [-] WebSocket client connecting (principal=canonymous)

2026-10-07T10:00:10.354163524Z INFO: fe80::14d9:5f44:426d:9475:0 - "WebSocket /api/v1/ws" [accepted]

2026-10-07T10:00:10.354284690Z INFO: connection open

2026-10-07T10:00:10.354469226Z 2026-10-07 12:00:10,354 INFO [backend.app.api.routes.websocket] [-] WebSocket client connected

2026-10-07T10:00:10.354568891Z 2026-10-07 12:00:10,354 INFO [backend.app.api.routes.websocket] [-] Sent initial status for 0 printers

2026-10-07T10:00:10.362044816Z 2026-10-07 12:00:10,361 INFO [backend.app.api.routes.websocket] [-] WebSocket client disconnected normally

2026-10-07T10:00:12.292916470Z 2026-10-07 12:00:12,292 INFO [backend.app.api.routes.auth] [1ea3e2b2] Setup completed: auth_enabled=False, admin_created=False

2026-10-07T10:00:12.889811120Z 2026-10-07 12:00:12,809 INFO [backend.app.api.routes.websocket] [-] WebSocket client connecting (principal=canonymous)

2026-10-07T10:00:12.810027155Z INFO: fe80::14d9:5f44:426d:9475:0 - "WebSocket /api/v1/ws" [accepted]

2026-10-07T10:00:12.810150586Z INFO: connection open

2026-10-07T10:00:12.810332449Z 2026-10-07 12:00:12,810 INFO [backend.app.api.routes.websocket] [-] WebSocket client connected

2026-10-07T10:00:12.810431522Z 2026-10-07 12:00:12,810 INFO [backend.app.api.routes.websocket] [-] Sent initial status for 0 printers

2026-10-07T10:00:29.295396591Z 2026-10-07 12:00:29,295 INFO [backend.app.services.discovery] [95d4600d] Starting subnet scan of 192.168.255.0/24 (254 hosts)

2026-10-07T10:00:31.514452858Z 2026-10-07 12:00:31,514 INFO [backend.app.services.discovery] [95d4600d] Found potential Bambu printer at 192.168.255.134

2026-10-07T10:00:35.340806550Z 2026-10-07 12:00:35,340 INFO [backend.app.services.discovery] [95d4600d] Subnet scan complete. Found 1 printers.

2026-10-07T10:00:42.942828371Z 2026-10-07 12:00:42,941 INFO [backend.app.api.routes.websocket] [-] WebSocket client disconnected normally

2026-10-07T10:00:49.203712058Z 2026-10-07 12:00:49,203 INFO [backend.app.api.routes.websocket] [-] WebSocket client connecting (principal=canonymous)

2026-10-07T10:00:49.203868890Z INFO: fe80::14d9:5f44:426d:9475:0 - "WebSocket /api/v1/ws" [accepted]

2026-10-07T10:00:49.203982075Z INFO: connection open

2026-10-07T10:00:49.204159463Z 2026-10-07 12:00:49,204 INFO [backend.app.api.routes.websocket] [-] WebSocket client connected

2026-10-07T10:00:49.204255481Z 2026-10-07 12:00:49,204 INFO [backend.app.api.routes.websocket] [-] Sent initial status for 0 printers

2026-10-07T10:00:51.819637061Z 2026-10-07 12:00:51,819 INFO [backend.app.services.camera] [e08d5cf4] Found ffmpeg at: /usr/bin/ffmpeg

2026-10-00:52.517057638Z 2026-10-07 12:00:52,516 INFO [backend.app.services.mqtt.relay] [e307d0ed] MQTT relay disabled

Logs, service state and the support bundle — the page to open before you ask for help.

EXTRA IPS, AND REACHING IT FROM ANYWHERE

Two things on the admin page's **Network** tab. Neither is needed for a normal setup. Reach for them when one address isn't enough, or when you aren't home.

Secondary IP aliases

A virtual printer impersonates a real one so your slicer can send straight to it — and each one needs an address of its own. Add one alias per virtual printer under **Network >**

Secondary IP aliases:

```
$ bambuddy-appliance net-alias-add 192.168.1.50/24
$ bambuddy-appliance net-alias-remove 192.168.1.50/24
```

Aliases sit **alongside** the appliance's own DHCP address, never in place of it, so you cannot strand the box off its own network from here.

Pick an address your router won't hand out

Choose one outside the DHCP range, or your router will eventually lease the same address to something else and the two will fight over it.

Remote access (Tailscale)

Reach your printers from anywhere without opening a single port on your router. Tailscale builds a private link between your own devices; the account is free and takes about a minute.

1

Network > Set up remote access

The appliance ships logged out, and stays that way until you do this.

2

Scan the code with your phone

Sign up or log in, then approve the appliance. The page notices by itself.

3

Use the name it gives you

Paste the MagicDNS name into your slicer's Add Printer dialog to reach your virtual printers from anywhere.

UPDATES AND BACKUPS

Two update lanes

Both live on the admin page under **Updates**, each showing what you have and what's available. Both stream their progress, and both survive you closing the tab.

LANE	WHAT HAPPENS
Bambuddy	Pulls the new version and waits for it to come up healthy. If it doesn't, the appliance puts the old one back by itself. Your data is never touched.
Operating system	A Debian upgrade. No rollback , may want a reboot, and refuses to start with under 1 GB free.

Back it up, before you need to

In Bambuddy: **Settings > Backup & Restore**. One file, holding your database and everything you have uploaded.

Keep it somewhere other than the appliance. A backup living on the card you are about to lose is not a backup.

The backups Bambuddy saves on the appliance (**Scheduled Backups**, or **Run Now**) can also be downloaded from the admin page: **Dashboard > Bambuddy Backup**. That works even when Bambuddy itself will not start.

What the backup does not hold

It is Bambuddy's backup, not the appliance's. Your appliance password, the Tailscale sign-in, your WiFi credentials and any IP aliases stay behind.

Restore onto a freshly flashed card and your printers, queue and history all come back. You redo the setup wizard by hand.

IF SOMETHING GOES WRONG

bambuddy.local doesn't resolve	Use the appliance's IP address from your router instead. Same page, same everything.
Stuck on the first wizard screen	It's waiting for the clock. Give it a minute with a working internet connection.
No Bambuddy-Setup network appears	Wait two minutes for the first boot. If an ethernet cable is plugged in, the appliance uses it and never starts its own WiFi — that's normal.
Bambuddy-Setup came back on its own	The WiFi password was wrong. Rejoin it and the wizard is waiting for you.
The printer won't connect	Check the access code hasn't changed, that Developer Mode is on, and that your printer's storage is in place.
The slicer can't find a virtual printer	It needs an address of its own. Add a secondary IP alias — page 16.
Slow, or printers keep dropping	Open the admin page and look for undervoltage warnings. This is almost always a power supply that is not the official 27 W one.
Forgot your Bambuddy account	A factory reset (admin page, or SSH). Your printers and history go with it, so restore a backup afterwards.
Forgot the appliance password	A factory reset clears it and the wizard asks for a new one — at the cost of your Bambuddy data. If SSH still works, the command on page 10 is the cheaper fix.

GETTING HELP

Nothing here is a dead end. There is a way back from every state this box can get itself into.

Send the support bundle

The admin page's **Diagnostics** tab packages every log the appliance keeps into a single download, with credentials stripped out. Attach it to any question and you will get a better answer, faster.

Ask a human

Questions, bug reports and ideas — the community and the maintainers are here.

GitHub Issues

github.com/maziggy/bambuddy/issues

Forum

forum.bambuddy.co.uk

Discord

discord.gg/aFS3ZfScHM

Before you ask

Three things turn a long thread into a short one: the appliance version, shown on the admin page's dashboard; the support bundle above; and what changed just before it broke — an update, a new printer, a router swapped out.

Your purchase includes support

The channel to use, and what you can expect back, are set out in the terms linked from your purchase email. The links above stay open to everyone regardless — Bambuddy is free software and its community is not gated behind a purchase.



APPLIANCE

AT A GLANCE

ADDRESS	WHAT IT IS
<code>bambuddy.local:8000</code>	Bambuddy — printers, queue, history
<code>bambuddy.local:8001</code>	The appliance's admin page
<code>ssh pi@bambuddy.local</code>	A shell, for recovery

Substitute the device name you chose in the wizard. If the name does not resolve, the appliance's IP address works everywhere the name does.

The two commands worth keeping

```
$ sudo bambuddy-appliance set-admin-password
$ sudo bambuddy-appliance factory-reset
```

Everything else is online.

wiki.bambuddy.cool/appliance

The full manual, the command line reference, and an honest account of the three things your appliance reports back — a random identifier, its hardware model, and its version. Never your prints, and never your data.

Bambuddy is open-source software under the AGPL. Your appliance runs exactly the same Bambuddy anyone can download and run for free — what you bought is the card that maintains itself, and someone to ask.