


SCREW TYPE QUICK CONNECT COUPLINGS – PARTEK


- Heavy duty stainless steel for high durability in waterblasting service
- Easy-grip texturing for hand-tight connections
- Interchangeable 3/4 and 1" NPT coupling halves
- Seal kits with O-ring and backup ring available

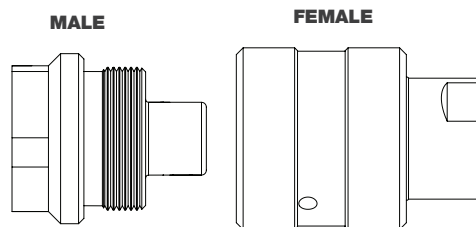

| PART NO. | CONNECTION TYPE | COUPLING HALVES | | SEAL KIT | RETAINING RING | MAX. OPERATING PRESSURE | |
|------------|-----------------|-----------------|-------------|------------|----------------|-------------------------|------|
| | | Female | Male | | | psi | bar |
| GP 060-P6 | 3/8 NPT Female | GP 060-P6F | GP 060-P6M | GP 660-P8 | GP 661-P8 | 15k | 1000 |
| GP 060-P8 | 1/2 NPT Female | GP 060-P8F | GP 060-P8M | GP 660-P8 | GP 661-P8 | 15k | 1000 |
| GP 060-P12 | 3/4 NPT Female | GP 060-P12F | GP 060-P12M | GP 660-P12 | GP 661-P12 | 12k | 830 |
| GP 060-P16 | 1" NPT Female | GP 060-P16F | GP 060-P16M | GP 660-P16 | GP 661-P16 | 10k | 690 |

LUG STYLE QUICK CONNECT COUPLINGS

- Quick connection to hoses and other components with retracting spring-loaded sleeve
- Safety pin prevents accidental disconnect
- Interchangeable 3/8 and 1/2 coupling halves
- High quality plated steel

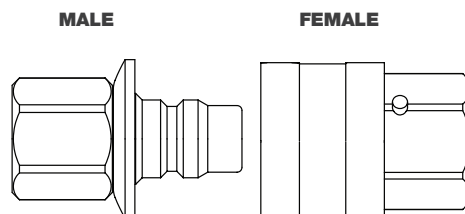

| PART NO. | CONNECTION TYPE | COUPLING HALVES | | MAX. OPERATING PRESSURE | | SEAL KIT | RETAINING RING | O-RING | B/U RING |
|-----------|-----------------|-----------------|------------|-------------------------|------|-----------|----------------|----------|----------|
| | | Male | Female | psi | bar | | | | |
| GP 160-P8 | 1/2 NPT Female | GP 160-P8F | GP 160-P8M | 15k | 1000 | GP 665-P8 | GP 667-P8 | GP 665.1 | GP 665.2 |