


## NATIONAL PIPE TAPER (NPT)

- Most widely used connection type at pressures of 15,000 psi (1000 bar) and below.

### SIZE REFERENCE CHART

SINGLE PIECE MALE • ACTUAL SIZE

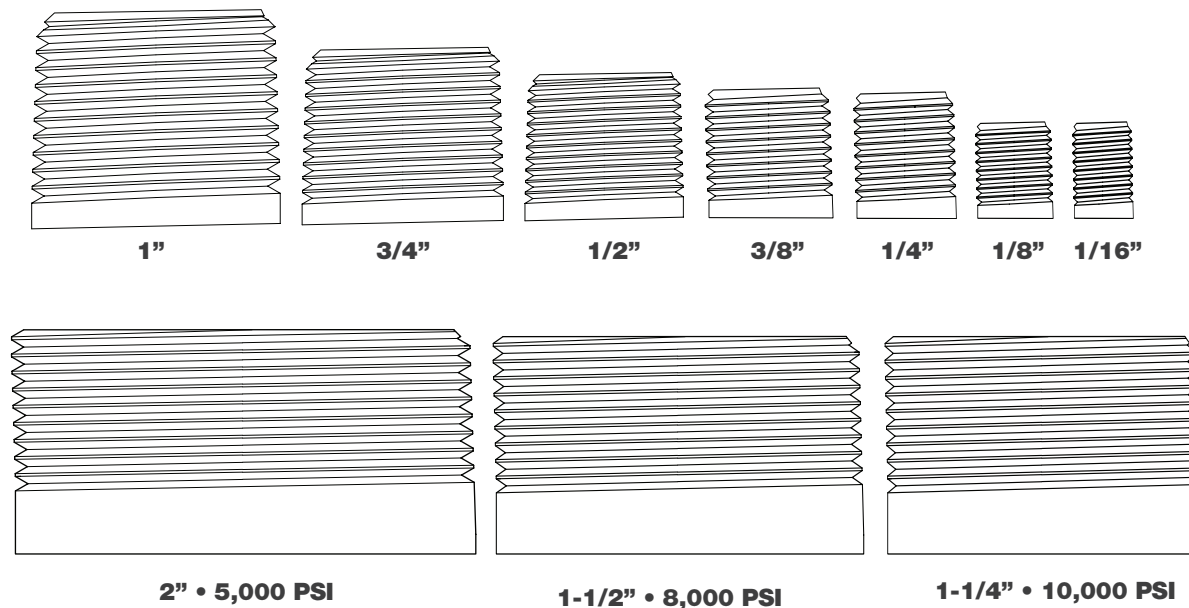


## TYPE M

- Industry standard connection

### SIZE REFERENCE CHART

SINGLE PIECE MALE • ACTUAL SIZE

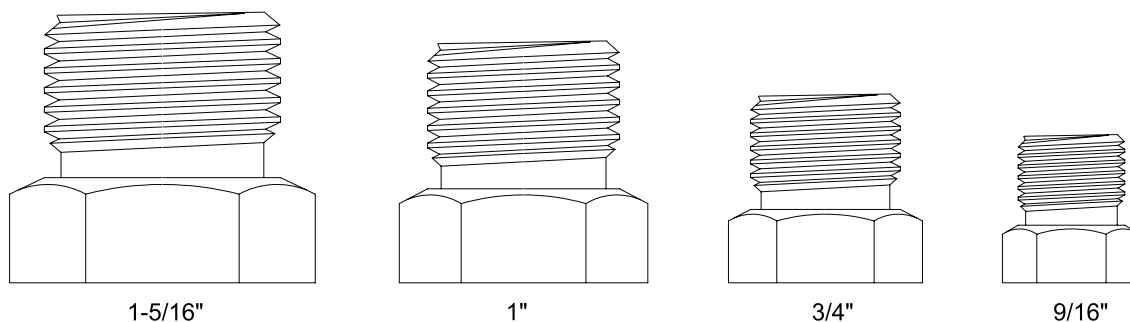

SIZE	CONNECTION THREAD	RECOMMENDED TORQUE	
		ft-lb	Nm
9/16 Type M	9/16 – 18UNF	30	41
3/4 Type M	3/4 – 16UNF	45	61
Type M	1" – 12UNF	70	95
1-5/16 Type M	1-5/16 – 12UN	110	149

Note: Always apply anti-seize to male threads before assembling waterblast connections.