# BANSHEE 22k (1500 bar) Head Options



### **BN9.5 HEAD SELECTION PRESSURE PART NUMBER** STYLE **FLOW RANGE** BN9.5 042-A Polisher 4.5-5.5 apm (17-21 l/min) 10-15K PSI (700-1000 BAR) BN9.5 043-A Unplugger 5-6 gpm (19-23 l/min) BN9.5 042-B 5-6 gpm (19-23 l/min) Polisher 15-22K PSI (1000-1500 BAR) BN9.5 043-B 5.5-6.5 gpm (21-25 l/min) BN9.5 044-1 7.0-8.0 gpm (27-30 l/min)

BN13 HEAD SELECTION		STONEAGE BANSHEE 13		
PRESSURE	PART NUMBER	STYLE	FLOW RANGE	
10-15K PSI (700-1000 BAR)	BN13 042-A	Polisher	7-9 gpm (27-34 l/min)	
	BN13 043-A	Unplugger	7-9 gpm (27-34 l/min)	
	BN13 044-A	Universal	8-10 gpm (30-38 l/min)	
15-22K PSI (1000-1500 BAR)	BN13 042-C	Polisher	7-9 gpm (27-34 l/min)	
	BN13 043-C	Unplugger	7-9 gpm (27-34 l/min)	
	BN13 044-C	Universal	8-10 gpm (30-38 l/min)	

BN18 HEAD SELECTION		STONEAGE BANSHEE 18		
PRESSURE	PART NUMBER	STYLE	FLOW RANGE	
10-15K PSI (700-1000 BAR)	BN18 042-A	Polisher	11-14 gpm (42-53 l/min)	
	BN18 042-B	Polisher	8-10 gpm (30-38 l/min)	
	BN18 043-A	Unplugger	11-14 gpm (42-53 l/min)	
	BN18 043-B	Unplugger	8-10 gpm (30-38 l/min)	
	BN18 044-A	Universal	11-14 gpm (42-53 l/min)	
	BN18 044-B	Universal	8-10 gpm (30-38 l/min)	
15-22K PSI (1000-1500 BAR)	BN18 042-C	Polisher	11-14 gpm (42-53 l/min)	
	BN18 042-D	Polisher	8-10 gpm (30-38 l/min)	
	BN18 043-C	Unplugger	11-14 gpm (42-53 l/min)	
	BN18 043-D	Unplugger	8-10 gpm (30-38 l/min)	
	BN18 044-C	Universal	11-14 gpm (42-53 l/min)	

BN24 HEA	D SELECTION	11035 car	STONFAGE BANSHEE 24
PRESSURE	PART NUMBER	STYLE	FLOW RANGE
	BN24 042-A	Polisher	20-25 gpm (76-95 l/min)
	BN24 042-B	Polisher	15-19 gpm (57-72 l/min)
10-15K PSI	BN24 042-C	Polisher	12-14 gpm (45-53 l/min)
(700-1000 BAR)	BN24 044-A	Universal	20-25 gpm (76-95 l/min)
	BN24 044-B	Universal	15-19 gpm (57-72 l/min)
	BN24 044-C	Universal	12-14 gpm (45-53 l/min)
	BN24 042-D	Polisher	18-21 gpm (68-80 l/min)
	BN24 042-E	Polisher	15-17 gpm (57-64 l/min)
15-22K PSI (1000-1500 BAR)	BN24 042-F	Polisher	12-14 gpm (45-53 l/min)
	BN24 044-D	Universal	18-21 gpm (68-80 l/min)
	BN24 044-E	Universal	15-17 gpm (57-64 l/min)
	BN24 044-F	Universal	12-14 gpm (45-53 l/min)

BN33 HEA	AD SELECTION	V	STONEAGE SANOYEE 53
PRESSURE	PART NUMBER	STYLE	FLOW RANGE
10-15K PSI (700-1000 BAR)	BN33 044-A	Universal	40-49 gpm (150-190 l/min)
	BN33 044-B	Universal	33-39 gpm (130-150 l/min)
	BN33 044-C	Universal	26-32 gpm (98-120 l/min)
	BN33 044-D	Universal	20-25 gpm (76-95 l/min)
	BN33 044-E	Universal	15-19 gpm (57-72 l/min)
15-22K PSI (1000-1500 BAR)	BN33 044-F	Universal	22-26 gpm (83-98 l/min)
	BN33 044-G	Universal	18-21 gpm (68-80 l/min)
	BN33 044-H	Universal	15-17 gpm (57-64 l/min)
	BN33 044-I	Universal	12-14 gpm (45-53 l/min)

# **BANSHEE** 40k (2800 bar) Models

## **HOSE CHARTS FOR BANSHEE TOOLS ARE NOW AVAILABLE** ON OUR WEBSITE

#### **BANSHEE SPECIFICATIONS 40K PSI (2800 BAR)** MODEL **BN18 BN27 BN13** 0.60-1.0 in. 0.87-1.3 in. Tube ID 1.25-2.0 in. 15-25 mm 22-33 mm 32-51 mm 40k psi 40k psi 40k psi 2800 bar 2800 bar 2800 bar 4.5-6 gpm 5-8.5 gpm 5-8.5 gpm Flow Range 17-23 l/min 19-32 I/min 19-32 I/min 3/8-24 LH or 9/16-18 LH or 1/4-28 LH or 3/8-24 LH M14 LH M14 LH 0.52 in. 0.69 in. 1.06 in. 27 mm 13 mm 18 mm 4.7 in. 5.5 in. 3.5 in. 89 mm 120 mm 140 mm

0.60-1.0 in. ID Tubes (15-25 mm)

DO bar BANSHEE 13 40K

# BN18-40K LEFT-HANDED INLET NOW AVAILABLE

0.87-1.3 in. ID Tubes (22-33 mm)



### BN27-40K

1.25-2.0 in. ID Tubes (32-51 mm)



<sup>\*</sup> When cleaning 5/8" diameter tubes at 40k psi please contact our Technical Support team for hose specifications

# **BANSHEE**

40k (2800 bar) Head Options

BN13 40K HEAD SELECTION			
PRESSURE	PART NUMBER	STYLE	FLOW RANGE
30-40K PSI (2100-2800 BAR)	BN13 442-C	Polisher	5.5-6 gpm 21-23 l/min
	BN13 442-D	Polisher	4.5-5 gpm 17-19 l/min
	BN13 443-C	Unplugger	5.5-6 gpm 21-23 l/min
	BN13 443-D	Unplugger	4.5-5 gpm 17-19 l/min


BN18 40K HEAD SELECTION  STONEAGE BANSHEE 18 40K			
PRESSURE	PART NUMBER	STYLE	FLOW RANGE
	BN18 442-A	Polisher	8-8.5 gpm (30-32 l/min)
	BN18 442-B	Polisher	7-7.5 gpm (27-28 l/min)
	BN18 442-C	Polisher	6-6.5 gpm (23-25 l/min)
30-40K PSI	BN18 442-D	Polisher	5-5.5 gpm (19-21 l/min)
(2100-2800 BAR)	BN18 443-A	Unplugger	8-8.5 gpm (30-32 l/min)
	BN18 443-B	Unplugger	7-7.5 gpm (27-28 l/min)
	BN18 443-C	Unplugger	6-6.5 gpm (23-25 l/min)
	BN18 443-D	Unplugger	5-5.5 gpm (19-21 l/min)

## IMPORTANT! /////////

All **BANSHEE** tube cleaning tools require the use of a correctly sized open-end wrench to fit the flats provided on the inlet nut when attaching the tool to the lance.

## **DO NOT USE A PIPE WRENCH OR PLIERS WITH TEETH**

This can crush and crack the hardened steel body, leading to tool breakage during operation. It is also recommended to flush the tool with WD-40® for storage.

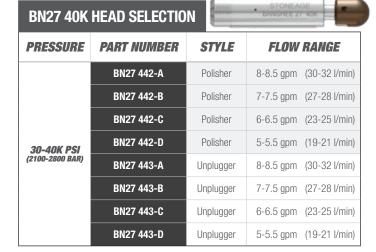

56 WWW.STONEAGETOOLS.COM • 1.970.259.2869 WWW.STONEAGETOOLS.COM • 1.970.259.2869 57