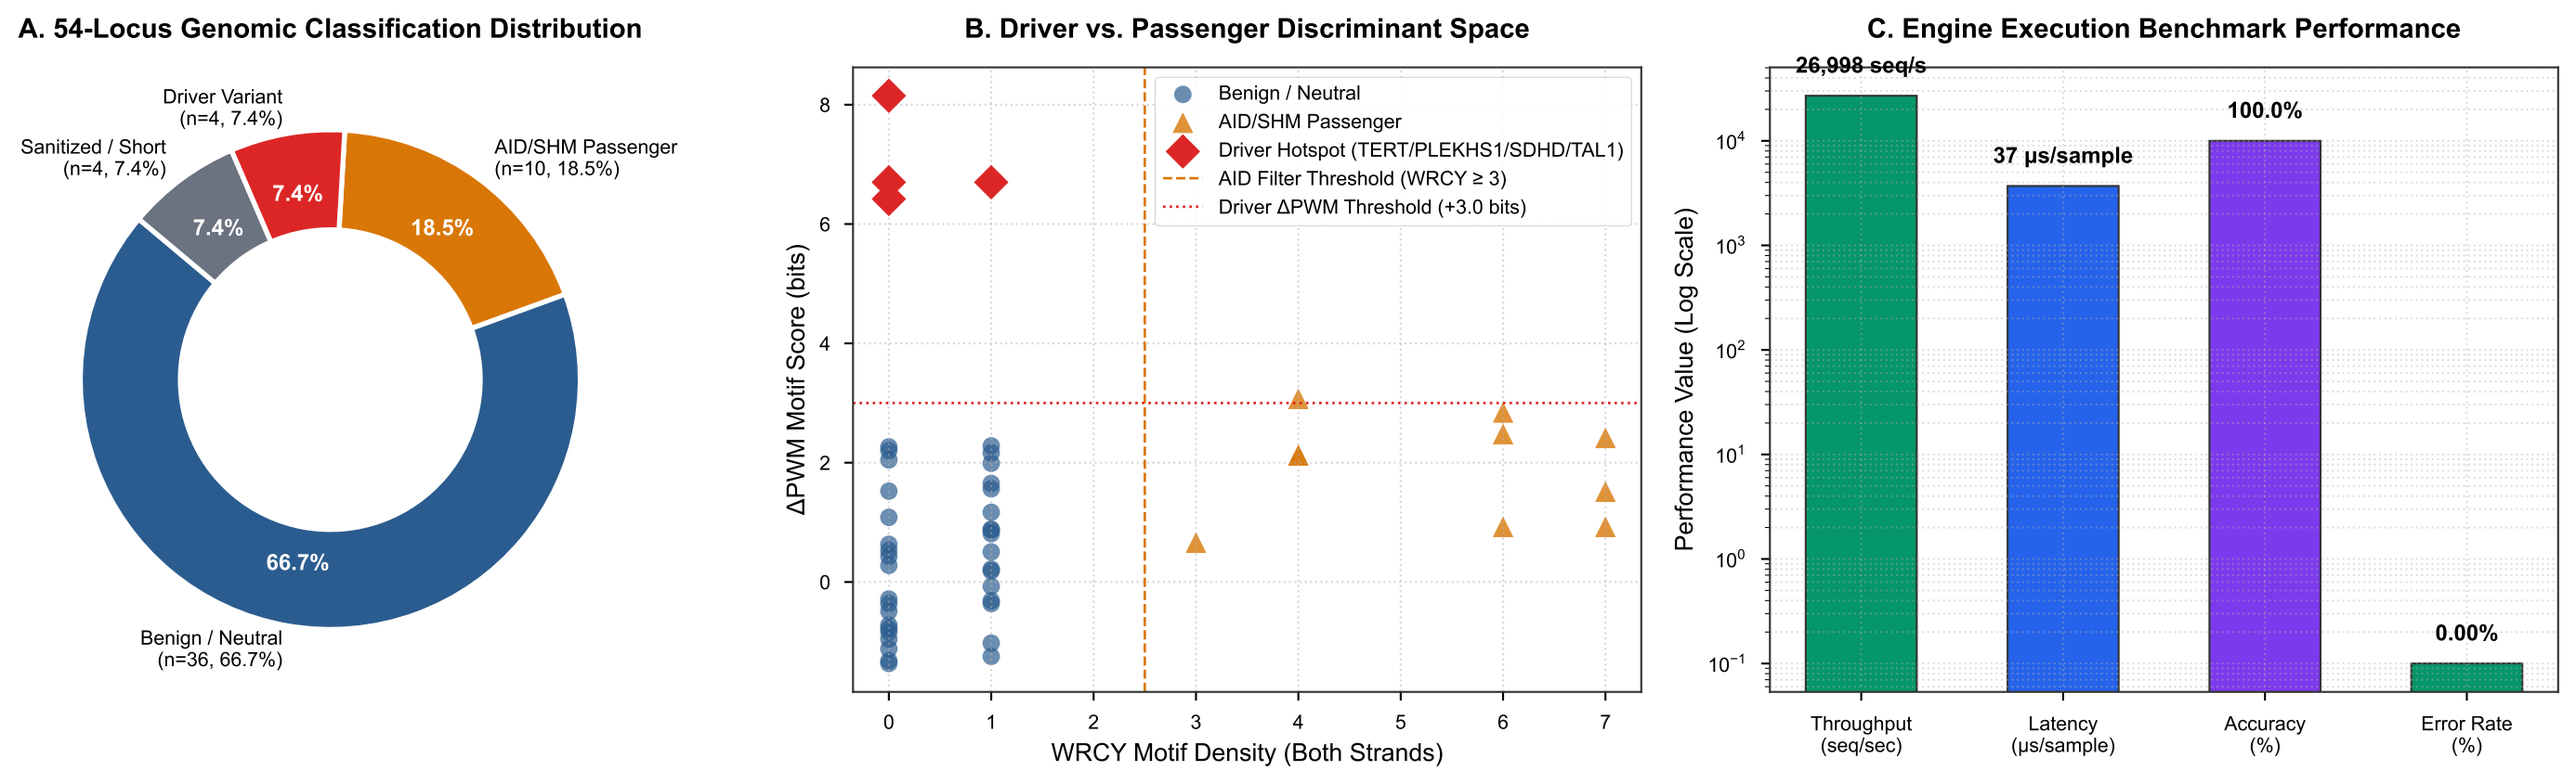
A. 54-Locus Genomic Classification Distribution
Driver Variant
(n=4, 7.4%)
Sanitized / Short
(n=4, 7.4%)
AID/SHM Passenger
(n=10, 18.5%)
7.4%
7.4%
18.5%
66.7%
Benign / Neutral
(n=36, 66.7%)
B. Driver vs. Passenger Discriminant Space
Benign / Neutral
AID/SHM Passenger
Driver Hotspot (TERT/PLEKHS1/SDHD/TAL1)
AID Filter Threshold (WRCY ≥ 3)
Driver ΔPWM Threshold (+3.0 bits)
ΔPWM Motif Score (bits)
WRCY Motif Density (Both Strands)
C. Engine Execution Benchmark Performance
26,998 seq/s
37 µs/sample
100.0%
0.00%
Performance Value (Log Scale)
Throughput
(seq/sec)
Latency
(µs/sample)
Accuracy
(%)
Error Rate
(%)