



Permissible depth of M2.5
screw insertion : 2.8 max
Mounting torque : 0.2 Nm max

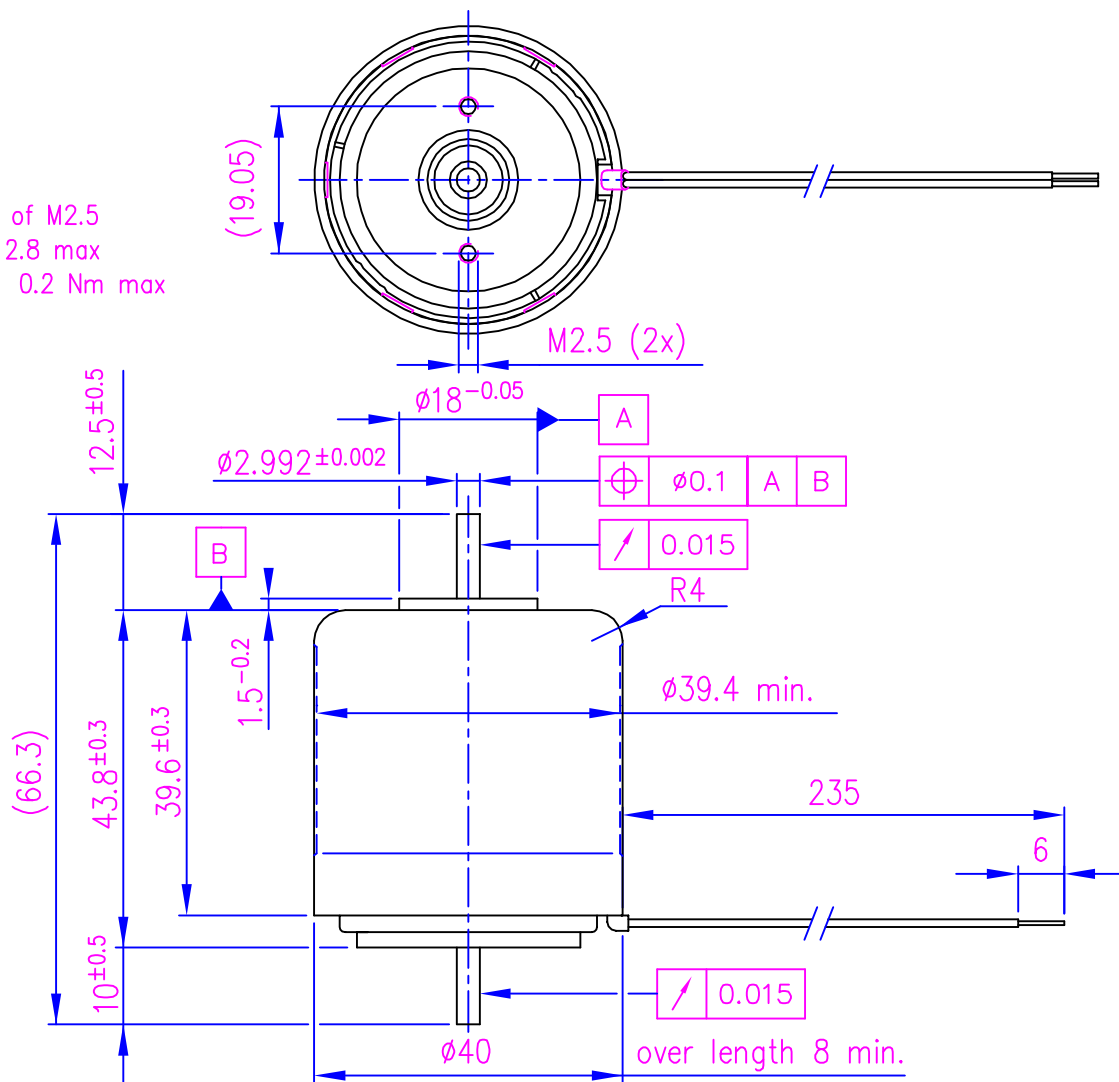

The direction of rotating is given
in connection with the polarity.

Permissible depth of M3
screw insertion: 3 max.
Permissible torque: 0.6Nm

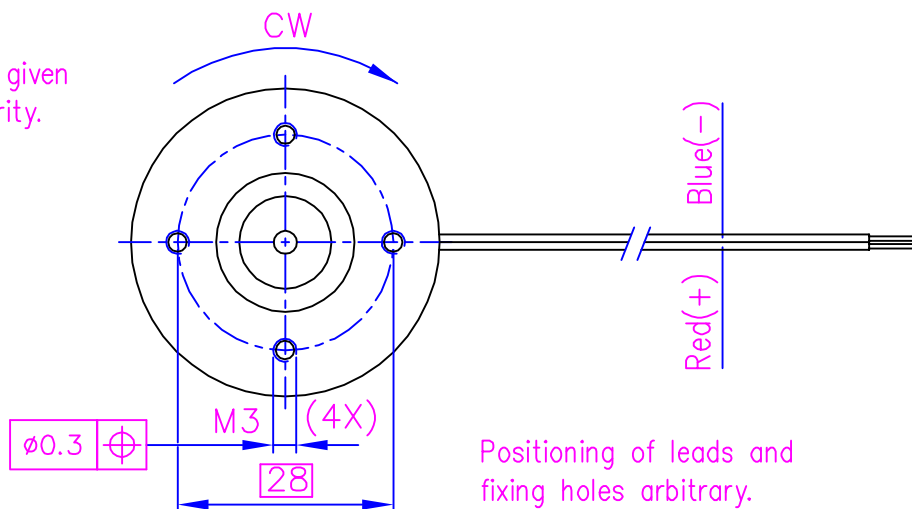

Positioning of leads and
fixing holes arbitrary.

12-06-13	Initial drawing	Wilco Rook
DATE	DESCRIPTION	ENGINEER

REVISION HISTORY

SCALE	EUROP. PROJ.	MATERIAL	CL40
1:1			

CHECK.	Motor assy	9904 120 16913
--------	------------	----------------

SUPERS.	SHEET. 112-1 1	PROPERTY OF
NAME. Wilco Rook	CREATION DATE. 12-06-13	PRECISION MOTOR TECHNOLOGY BV
FILE NAME. 9904 120 16913 112-1 12-06-13		DORDRECHT - THE NETHERLANDS