

REV2 REFERENCE / REDESIGN IN PROGRESS

22 September 2026: the current print order is N1 nose only.

Use Manufacturing/Nose_Print_N1/A59_Nose_N1_mm.stl and Nose_N1_Print_Guide.pdf. Quantity one, millimetres, 100%.

The following pages retain the old Rev2 design for reference. They are not the current full-aircraft manufacturing instructions. Their original page numbers remain unchanged; this notice is an additional page.

Superseded for the new design

Landing gear and steering system; the old 42-piece print order; A59 cover screw holes, columns, spacers and shaped washers; the large nose pitot-access notch. Do not fabricate these from the old instructions.


N1 restores the original upper nose shell. It uses a proposed simple ledge/tape attachment and a probe passage drilled to actual hardware during assembly. It retains the original rear mating envelope.

The rest of the aircraft will be simplified around the plywood skeleton and foamboard. Remaining mounts, control construction, belly protection, installation details and mass/CG estimates still require that redesign. Do not use the old mass, CG or gear clearance numbers for the new configuration.

Existing cutting templates are retained until a reuse/change list is complete. The N1 release is a nose-only handoff, not a completed redesign of every file in this manual.

A26 / motor mounting

Emax ECO II 2807 1300 KV / 5 mm plywood firewall

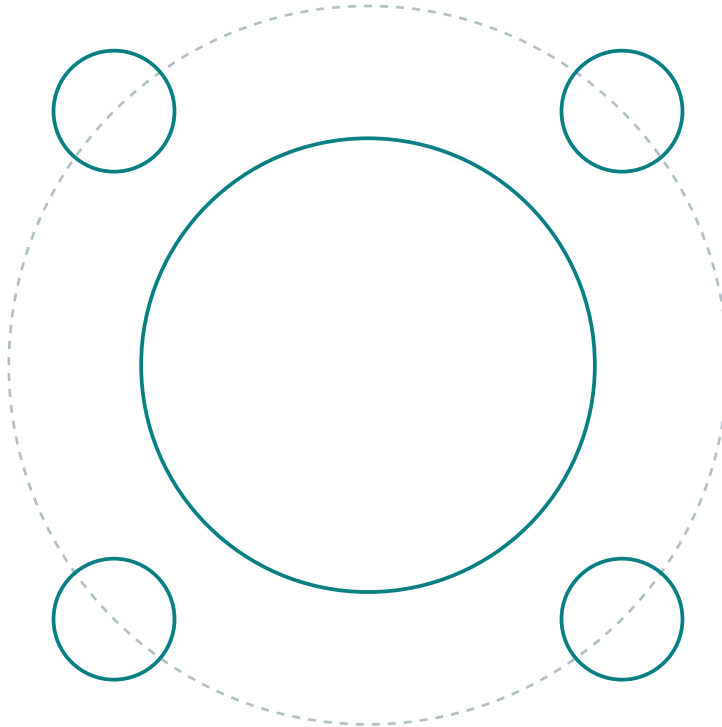

Four clearance holes: diameter 3.2 mm on a 19 mm bolt circle

Adjacent hole spacing: 13.435 mm. Centre opening: diameter 12 mm.

Use the A26 DXF or actual-size plywood template for cutting.

This enlarged reference is not a cutting template.

Use four M3 motor screws and washers. Measure safe thread engagement on the actual motor so no screw can reach a winding.

The rear spine ends flush at Y=582.65, the motor mounting face.

No plywood tab may extend behind this plane into the motor envelope.

Keep phase leads secured and clear of the rotating bell.