


A26 / motor mounting

Emax ECO II 2807 1300 KV / 5 mm plywood firewall

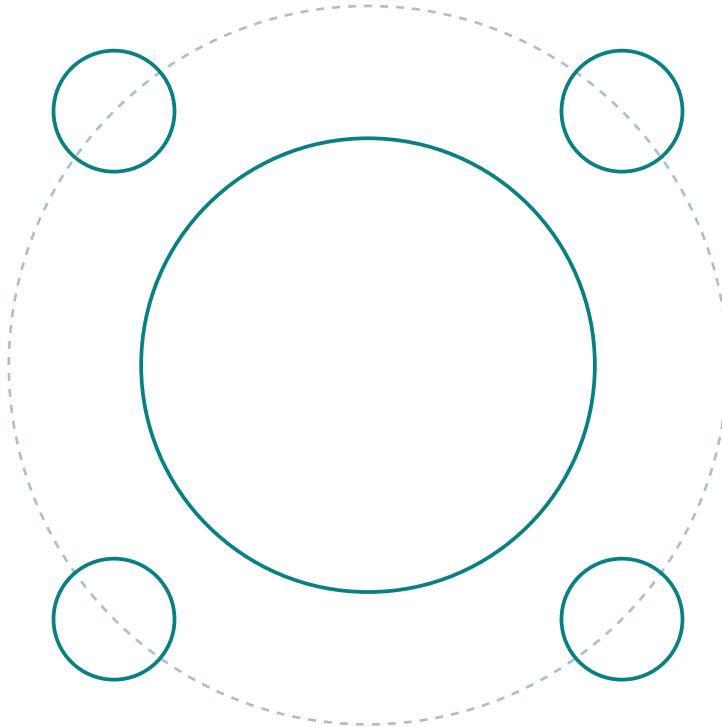

Four clearance holes: diameter 3.2 mm on a 19 mm bolt circle

Adjacent hole spacing: 13.435 mm. Centre opening: diameter 12 mm.

Use the A26 DXF or actual-size plywood template for cutting.

This enlarged reference is not a cutting template.

Use four M3 motor screws and washers. Measure safe thread engagement on the actual motor so no screw can reach a winding.

The rear spine ends flush at Y=582.65, the motor mounting face.

No plywood tab may extend behind this plane into the motor envelope.

Keep phase leads secured and clear of the rotating bell.