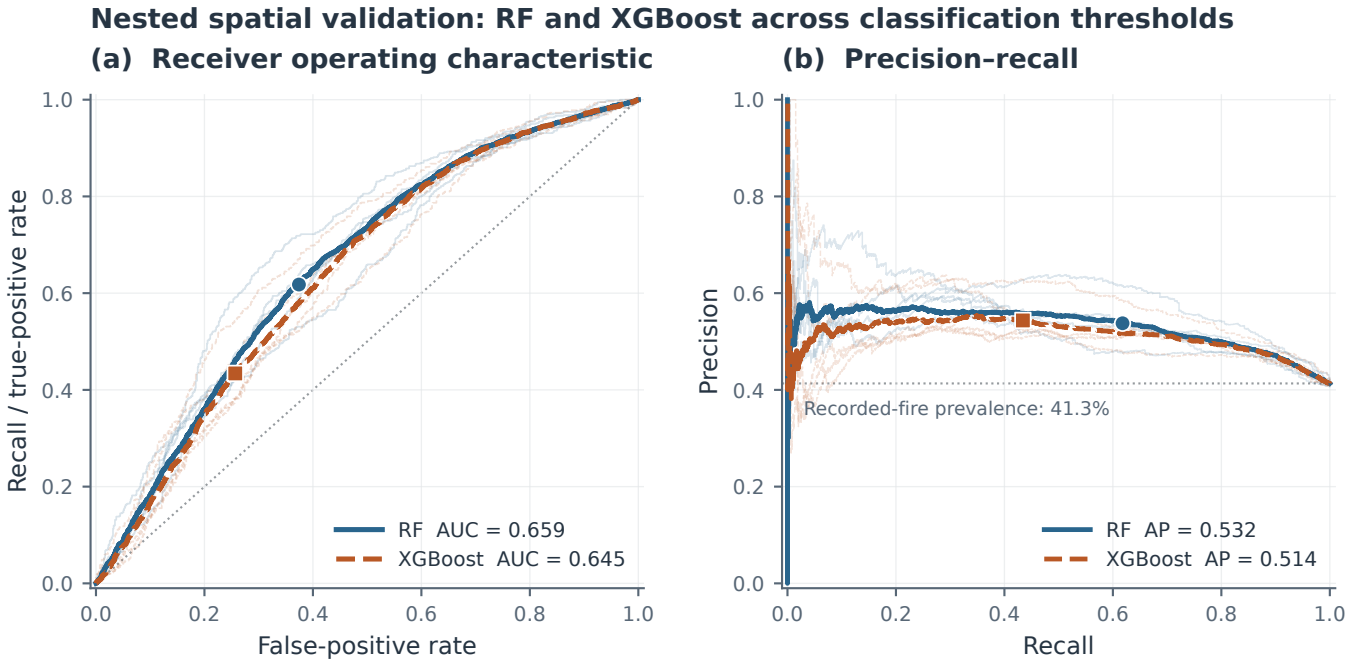

Nested spatial validation: RF and XGBoost across classification thresholds
(a) Receiver operating characteristic
(b) Precision–recall
Recall / true-positive rate
False-positive rate
RF AUC = 0.659
XGBoost AUC = 0.645
Precision
Recall
Recorded-fire prevalence: 41.3%
RF AP = 0.532
XGBoost AP = 0.514
Bold curves: pooled held-out predictions. Thin curves: five outer folds, shown descriptively.
Points: saved 0.50 classifications. AP: average precision. No threshold selection or confidence bands.