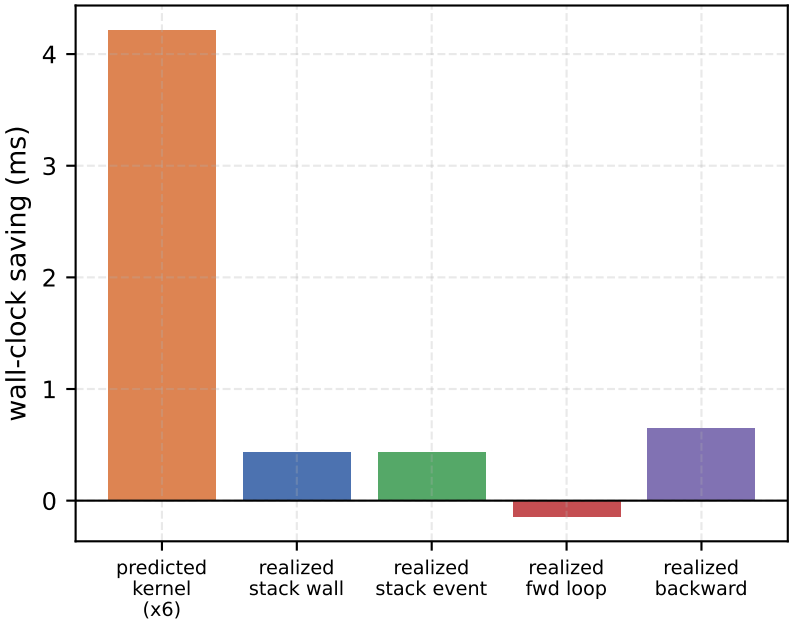
Predicted versus realized saving
wall-clock saving (ms)
4
3
2
1
0
predicted kernel (x6)
realized stack wall
realized stack event
realized fwd loop
realized backward

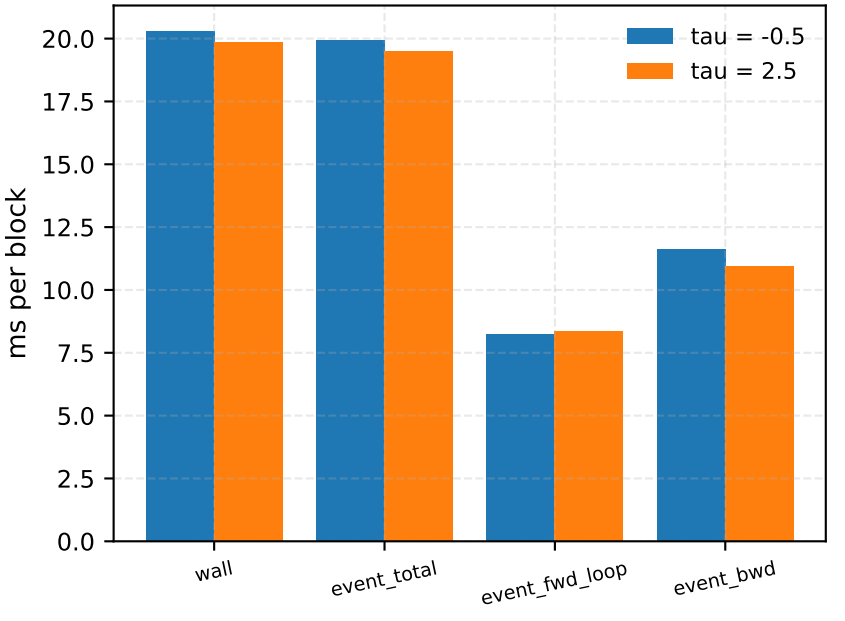
6-layer stack: timing components
ms per block
20.0
17.5
15.0
12.5
10.0
7.5
5.0
2.5
0.0
tau = -0.5
tau = 2.5
wall
event_total
event_fwd_loop
event_bwd

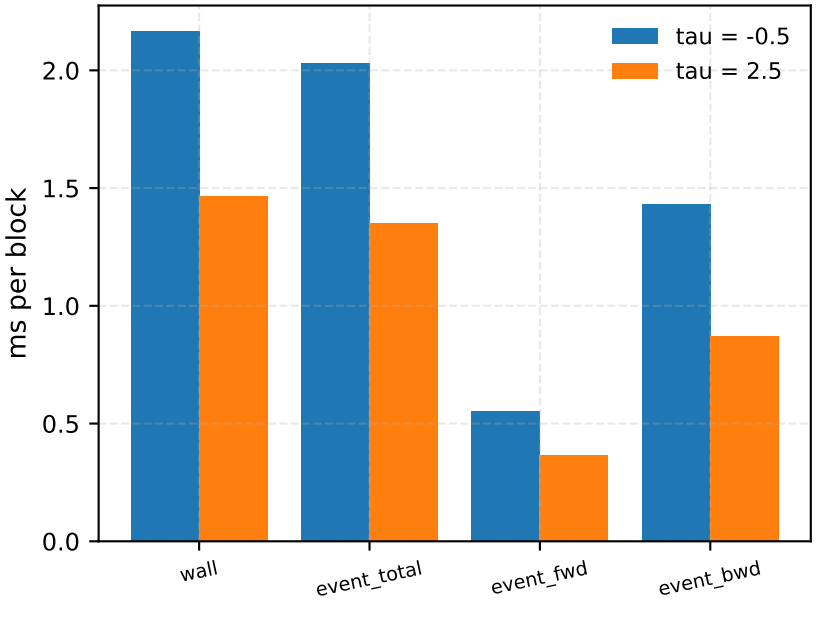
single kernel: timing components
ms per block
2.0
1.5
1.0
0.5
0.0
tau = -0.5
tau = 2.5
wall
event_total
event_fwd
event_bwd