DATASHEET

FLUXX.KUBUZ.2.5.EXT.OWH
FLUXX.KUBUZ.2.5.EXT.PGO
FLUXX.KUBUZ.2.5.EXT.POR
FLUXX.KUBUZ.2.5.EXT.PGBF
LUXX.KUBUZ.2.5.EXT.PGR
FLUXX.KUBUZ.2.5.EXT.PRR

FLUXX
Advanced Battery Technology

KUBUZ
KUBUZ EXT

Smart Expansion Battery Module for Kubuz 2.5 INV Micro Power Plant Systems

WALL-MOUNTED, PLUG-AND-PLAY EXTENSION - DESIGNED TO CONNECT SEAMLESSLY TO THE MAIN INVERTER BATTERY (FLUXX-KUBUZ-INV-2.5)



Designed and manufactured by

TMRWS. ENERGY


FLUXX
Advanced Battery Technology

KUBUZ
KUBUZ EXT
Smart Expansion Battery Module for Kubuz 2.5 INV Micro Power Plant Systems


the product


the ac connected detail


vibrant colours

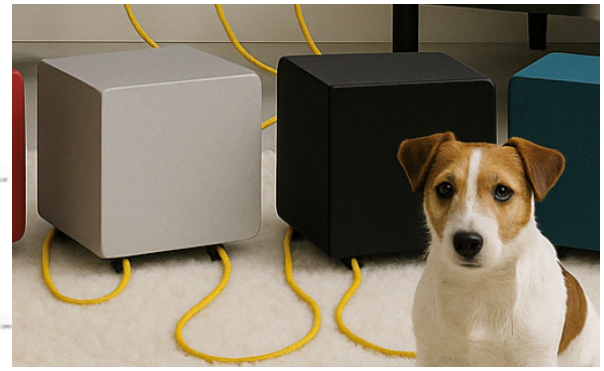
expandable

EARN AND SAVE MORE
Increased capacity (2.56 kWh) to boost savings and self-consumption

PLUG+>PLAY
10-min setup with two cables + precision wall bracket

PERFORMANCE
2.56kWh Capacity · **Upto 2.5kW** Grid-Tied Output · 2.5kW Backup Output

PARALLEL OPERATION
No inverter needed - **expands storage** alongside the main unit

EXPANDABLE
Add up to 3 extension batteries on a single circuit **(10 kWh)**

SMART MONITORING
Real-time **data tracking** via Emon app (through the connected KUBUZ with integrated inverter).

SAFE
Fire-suppression & pressure-relief built in

RGB BACKLIGHT
Programmable effects (breathing, night, solid, off) for **ambient wall lighting** and comfort

AESTHETIC HARMONY
Vibrant colors matched for a sleek, unified energy wall

Designed and manufactured by
TMRWS. ENERGY

FLUXX
Advanced Battery Technology

KUBUZ
KUBUZ EXT
Smart Expansion Battery Module for Kubuz 2.5 INV Micro Power Plant Systems

Battery Info

Rated Voltage	51.2 V (16S)
Capacity	2560 Wh
Nominal Capacity (Ah)	50 Ah (2560 Wh ÷ 51.2 V)
Life Cycle (Times)	>6000 (@25°C, 90% DoD)
Battery Type	LiFePO4
DoD	90%
Battery Connection	16S1P, series-wired, single module
Scalable Configuration	Up to 4 modules in parallel (max. 10 kWh)

Efficiency

Battery-AC Side Max. Efficiency	> 93.5 %

Protection

Protection Class	Class I
Overvoltage / Voltage Withstand Level	DC Category II / AC Category III

Packaging

Packaging Type	Carton Box
Packaging Dimensions	500 x 500 x 200 mm
Quantity per Package	1 unit
Gross Weight	29 kg




Safety

Pressure Relief Valve	Integrated pressure-relief valve with safety mechanism
Fire Suppression	Smart thermal-aerosol fire extinguishing system

Mechanical Specifications

Dimensions (L x W x H)	450 x 450 x 150 mm
Weight	25 kg
Installation Requirement	Optional
Cooling Method	
Noise Level	≤10 dB (full load, quiet mode active)
Mounting	Wall-mounted with precision brackets
Enclosure Material	Aluminium-metal combination (rustproof)
Front Finish	KUBUZ-2.5-EXT-OWH (Oyster White) - RAL 1013 KUBUZ-2.5-EXT-PGO (Pearl Gold) - RAL 1036 KUBUZ-2.5-EXT-POR (Pearl Orange) - RAL 2013 KUBUZ-2.5-EXT-PGB (Pearl Gentian Blue) - RAL 5025 KUBUZ-2.5-EXT-PGR (Pearl Green) - RAL 6035 KUBUZ-2.5-EXT-PRR (Pearl Ruby Red) - RAL 3032
Rear Finish	Signal Black (RAL 9004)


Front View



Top view



Side view



FLUXX
Advanced Battery Technology

KUBUZ
KUBUZ EXT
Smart Expansion Battery Module for Kubuz 2.5 INV Micro Power Plant Systems

General Specifications

Isolation Type	Isolated
Operating Temperature Range	–20°C to +55°C (storage: –30°C to +85°C) 0% – 95% (non-condensing)
Relative Humidity	
Ingress Protection Rating	Designed for indoor use – compliant with IP20 (non-waterproof).
Cooling Strategy	Natural convection
Maximum Operating Altitude	2000 m above sea level
Grid Connection Standards	VDE 4105/0124, TOR R25, NF EN 50549-1, UNE 217002, TS 631, CEI 0-21, PETREE, PN-EN 50549-2, G98, AS/NZS 4777.2
Certifications / Regulatory / EMC	IEC 62040, IEC 62477, IEC/EN 61000-6-1/-2/-3/-4, IEC/EN 61000-3-2/-3, EN 300 328, EN 301 489-1/-17, EN 50665, CB IEC 61619

Additional Data

On-grid AC Connection	Power Connection (DC link) Dedicated DC power cable (included) connects directly to the main inverter battery (KUBUZ 2.5 INV) to share energy storage capacity.
AC Cable	Communication Link (Data cable)
Backup AC Output Connection	RS-type data cable enables real-time monitoring, smart control, and synchronization with the main system via Emon.
Display	Multi-function LED indicators panel Battery Status LEDs (SoC) Power / Activity LED Wireless Connectivity LEDs Error / Warning LED Link / Sync LED
Ambient LED Lighting	RGB backlight with programmable visual effects (breathing, night, solid color, off)

Accessories & Monitoring (Included)

EMON

Smart Plug



Emon-SMP-16A
1 x EMON Smart Plug
(Wi-Fi enabled, for appliance control and load monitoring)

Emon APP



System Scheduling & Management
(via main KUBUZ 2.5 INV)
Controlled and monitored through the **Emon App** (iOS/Android)

System Scheduling & Management



Smart-plug integration for load management (requires main inverter)mic-tariff scheduling to optimize cost savings
Dynamic-tariff scheduling and whole-home optimization
Grid-balancing and smart-meter connectivity managed centrally
Note: This module does not operate the Emon system independently. All EMS functions are accessed via the main battery inverter.



Included Cables
Power Connection (DC link):
Pre-assembled cable for direct parallel connection to main KUBUZ 2.5 INV battery
Communication Link (Data cable):
RS485 cable with waterproof aviation connectors for system communication

Mounting System Included
Precision Metal Wall Bracket
included for secure and aligned installation alongside the main KUBUZ 2.5 INV battery
Ensuresmcorrect spacing and stable support for parallel-mounted configuration

FLUXX
Advanced Battery Technology

KUBUZ
KUBUZ EXT
Smart Expansion Battery Module for Kubuz 2.5 INV Micro Power Plant Systems

Expansion


Flexible Expansion

Plug-and-play connection to the main inverter battery via two cables
Combined system storage >10 kWh when used with multiple modules, no inverter or daisy-chain logic required.
Expandable with up to three extra extension modules on the same circuit, parallel wiring only
Precision Metal Wall Bracket ensures secure, aligned, and stable side-by-side mounting with the main KUBUZ 2.5 INV.
Note: Confirm compliance with local electrical regulations before expanding




Single-Room Parallel Configuration

Designed for **direct connection to the main inverter** battery in the same room
Modules operate in parallel to **increase usable capacity**
Minimal cabling and **compact system** layout



Multi-Room Distributed Configuration

Supports **flexible placement in other rooms** (if local regulations allow)
Connects via **standard sockets** to the same circuit
Enables **distributed energy availability** across spacesbuted power delivery for optimized load balancing
Note: Installation must comply with local electrical codes



Warranty Information

Factory Warranty	Valid for 10 years or 6,000 cycles, whichever comes first
Activation Requirement	Warranty must be activated via online registration on the official website or app
Unlock EMS	Access to free, country-specific EMS system features is revealed only after completing warranty registration

⚠ Warning
Electrical codes and installation requirements vary by country and region.
Before installing a plug-and- play micro power plant, you must review all relevant local regulations and consult a **licensed electrician** to ensure the system is installed safely and in **full compliance** with applicable laws.

Proudly designed in Europe by passionate European product designers and engineers. These designs are registered with the European Design Register. Any unauthorised copying or use is strictly prohibited and will result in immediate legal action.
*Specifications are subject to change without further notification
info@tmrws.energy | www.tmrws.energy