FLUXX
Advanced Battery Technology


KUBUZ
KUBUZ INV
Micro Power Plant (Home Battery and Inverter Design) Featuring a Unique Aesthetic


WALL-MOUNTED, AC-COUPLED, BI-DIRECTIONAL PLUG-AND-PLAY SYSTEM DESIGN




FLUXX
Advanced Battery Technology

KUBUZ
KUBUZ INV
Micro Power Plant (Home Battery and Inverter Design) Featuring a Unique Aesthetic


the product

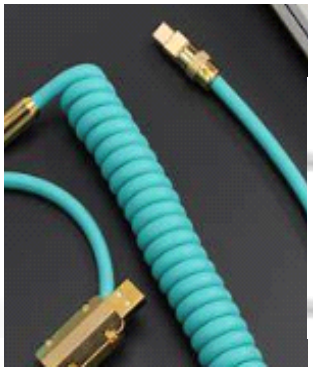
the ac connected detail


vibrant colours

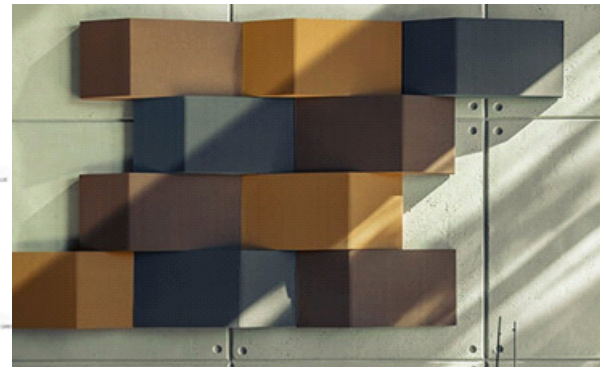
expandable

EARN
Save and earn through **dynamic-tariff automation, smart day/night modes or grid balancing**

BI-DIRECTIONAL INVERTER
Allows both AC charging and discharging for smart grid interaction, battery backup, and self-consumption

PLUG+>PLAY
10-minute install with just two connections

PERFORMANCE
2.56kWh Capacity · **2.5kW Bi-Directional** Output · Backup and Smart Charging via AC or PV

UNIVERSAL COMPATIBILITY
Works with **any existing** solar PV system; supports **anti-feed**-in mode

EXPANDABLE
Wall-mount up to 3 extra batteries **(10 kWh)**

SMART MONITORING
Real-time **data tracking** via Emon app

SAFE
Fire-suppression & pressure-relief built in

RGB BACKLIGHT
Programmable effects (breathing, night, solid, off) for **ambient wall lighting** and comfort

AESTHETIC HARMONY
Pearl white design with vibrant accents

Designed and manufactured by
TMRWS. ENERGY

FLUXX
Advanced Battery Technology

KUBUZ
KUBUZ INV
Wall-mounted, AC-coupled, plug-and-play home battery design incl. inverter

Battery Info
FLUXX

Rated Voltage	51.2 V (16S)
Capacity	2560 Wh
Nominal Capacity (Ah)	50 Ah (2560 Wh ÷ 51.2 V)
Life Cycle (Times)	>6000 (@25°C, 90% DoD)
Battery Type	$LiFePO_4$
DoD	90%
Battery Connection	16S1P, series-wired, single module
Scalable Configuration	Up to 4 modules in parallel (max. 10 kWh)

AC Input / Output (On Grid)
MOEBIUS

Rated Output Power	2.5 kW (AC)
Rated Input Power (Battery Charge)	Selectable: 2400W or 800W (programmable setting)
Operating Phase	Single-phase (L / N / PE)
Rated Grid Voltage	230 V
Grid Voltage Range	187 V – 253 V
Rated Grid Frequency	50 Hz
Rated Output Current	10.90 A
Power Factor	>0.99 (default); adjustable from 0.8 leading to 0.8 lagging
Total Harmonic Distortion (THDi)	<0.3%

Back-Up Output (Off-Grid Mode)
MOEBIUS

Rated Output Power	2.5 kW
Maximum Apparent Output Power	3.5 kVA (for 10 seconds)
Output Voltage	230 V
Output Current	10.9 A
Output Frequency	50 Hz<
Total Harmonic Distortion (THDu)	3% (with linear load)

Efficiency

Battery-AC Side Max. Efficiency	> 93.5 %

Protection

Protection Class	Class I
Overvoltage / Voltage Withstand Level	DC Category II / AC Category III


Safety

Pressure Relief Valve	Integrated pressure-relief valve with safety mechanism
Fire Suppression	Smart thermal-aerosol fire extinguishing system


Mechanical Specifications

Dimensions (L x W x H)	450 x 450 x 150 mm
Weight	34 kg
Installation Requirement	Required
Cooling Method	Passive cooling rib and Axial fan integrated
Noise Level	≤ 35 dB (full load, quiet mode active)
Mounting	Wall-mounted
Enclosure Material	Aluminium-metal combination (rustproof)
Front Finish	Oyster White (RAL 1013)
Rear Finish	Signal Black (RAL 9004)


Front View



Top view



Side view



Packaging

Packaging Type	Carton Box
Packaging Dimensions	500 x 500 x 200 mm
Quantity per Package	1 unit
Gross Weight	38 kg



Designed and manufactured by
TMRWS. ENERGY

FLUXX
Advanced Battery Technology

KUBUZ
KUBUZ INV
Wall-mounted, AC-coupled, plug-and-play home battery design incl. inverter

General

Isolation Type	Isolated
Operating Temperature Range	–20°C to +55°C (storage: –30°C to +85°C)
Relative Humidity	0% – 95% (non-condensing)
Ingress Protection Rating	Designed for indoor use – compliant with IP20 (non-waterproof).
Cooling Strategy	Natural Convection
Maximum Operating Altitude	2000 m above sea level
Grid Connection Standards	VDE 4105/0124, TOR R25, NF EN 50549-1, UNE 217002, TS 631, CEI 0-21, PETREE, PN-EN 50549-2, G98, AS/NZS 4777.2
Certifications / Regulatory / EMC	IEC 62040, IEC 62477, IEC/EN 61000-6-1/-2/-3/-4, IEC/EN 61000-3-2/-3, EN 300 328, EN 301 489-1/-17, EN 50665, CB IEC 61619

Additional Data

On-grid AC connection	3-wire household plug (Type E/F, 16A, Euro standard)
AC cable	Spiral cable – 2.5m (extendable to 3m)
Back-up Output Connection	3-pin socket (CEE 16A, 230V – "Euro Blue" type)
Display	Multi-function LED indicators panel Battery Status LEDs (SoC) Wireless Connectivity LED Wi-Fi Wireless Connectivity LED Bluetooth Error / Warning LED Inverter / System Status LEDs
Ambient LED Lighting	RGB backlight with programmable visual effects (breathing, night, solid color, off)






Accessories & Monitoring (Included) EMON

Smart plug	Emon-SMP-16A 2 x EMON Smart Plugs (Wi-Fi enabled, for appliance control and load monitoring) Emon-SMP-16A
Emon APP	Mobile application available for iOS (App Store) and Android (Google Play)






Expansion

Flexible Expansion

Add up to **3 extra battery modules** (plug-and-play, same circuit)
Total usable storage capacity >10 kWh
Daisy-chain layout allows parallel expansion **without additional inverter**
Note: Confirm compliance with local electrical regulations before expanding


Single-Room Parallel connection Configuration

Ideal for installations in a **single indoor space**
Battery modules connect in parallel to the inverter's input, maximizing usable capacity
Simplified wiring with **minimal spatial footprint**



Multi-Room Distributed Configuration

Supports battery modules installed in separate rooms
Flexible placement via **standard power outlets** (where permitted)
Distributed power delivery **improves load balancing** across zones
Note: Subject to local electrical code requirements and socket safety limits



Accessories & Monitoring (Included) EMON

System Scheduling & Management	**Smart plug control** for appliance on/off switching and energy usage tracking **Dynamic-tariff** scheduling to optimize usage based on **real-time electricity prices** **Grid-balancing** features via Emon app to support local grid load management **Whole-home automation** with smart meter (P1)connectivity and programmable schedules

FLUXX
Advanced Battery Technology

KUBUZ
KUBUZ INV
Wall-mounted, AC-coupled, plug-and-play home battery design incl. inverter

Accessories & Monitoring (Not included) — EMON

Single phase energy meter (with 2 pcs CT - clamp)	Emon-EM-1p For whole-home scheduling on single-phase setups




Three phase energy meter (with 3 pcs CT - clamp)	Emon-EM-1p For whole-home scheduling on 3-phase systems




P1 smart meter interface (Rj12 compatible)	Emon-p1-v1 For whole-home scheduling via digital smart meter (P1 port)



⚠ Note: These optional accessories enable full Emon integration, dynamic tariff scheduling, and advanced load control - depending on your local grid setup. Required for full Emon app integration and dynamic tariff scheduling, depending on your local grid connection.

Accessories & Monitoring (Optional) — EMON

EMS Display	EMON-DIS-10.1 10.1" EMS Energy Display for whole-home energy management and smart meter visualization



Warranty Information

Factory Warranty	Valid for 10 years or 6,000 cycles, whichever comes first
Activation Requirement	Warranty must be activated via online registration on the official website or app
EMS Software Access	Access to free, country-specific EMS system features is revealed only after completing warranty registration

⚠ Warning
Electrical codes and installation requirements vary by country and region.
Before installing a plug-and- play micro power plant, you must review all relevant local regulations and consult a **licensed electrician** to ensure the system is installed safely and in **full compliance** with applicable laws.

Designed and manufactured by
TMRWS. ENERGY
Proudly designed in Europe by passionate European product designers and engineers. These designs are registered with the European Design Register. Any unauthorised copying or use is strictly prohibited and will result in immediate legal action.
*Specifications are subject to change without further notification
info@tmrws.energy | www.tmrws.energy

Online Datasheet (PDF) | Product Catalogue | Installation / Commissioning Video | Support or Contact Form