



Service Bulletin

Customer Service Department

TELEPHONE: 419-661-9000 FAX: 419-661-9639

INTERNET: <http://www.glasstech.com>

Reference #051

**Bender Conveyor Helical Worm Gearbox, Glasstech part numbers listed below
(Manufactured by Nord) installed from December 2003 until November 2006,
Oil Replacement**

Glasstech Part numbers: S-GGB7SA012E-xx, where xx can be 02, 04, 05, 10, 11, 12, 14, 16, 18, 21 or 25


Glasstech recommends that the bender conveyor gearbox oil be drained and replaced with synthetic oil. In a limited number of applications, it is possible that a very low level electrical charge may flow through the gearbox. This low level charge will allow dissimilar metals in the gearbox to erode over time. The dielectric properties of the synthetic oil will greatly reduce the opportunity of an electrochemical reaction occurring. Glasstech, Inc. and Nord recommend the following procedure be used to exchange the oil:

“Nord recommends SHC (Synthetic hydrocarbon) 636 Mobile oil for helical worm gearboxes that are susceptible to low levels of electrical current.”

Procedure for flushing & refilling helical worm gearboxes is as follows:

1. Warm-up gearbox and drain the existing oil (Polyglycol) from Gearbox.
 - To warm-up gearbox run conveyor for approximately 10 minutes or more.
2. Refill the gearbox with 200 viscosity oil and run for approximately 5 minutes.
 - Recommended Flushing Oil: **Keystone Lubricants Nevastane SL460** (Available through Glasstech)
3. Drain the “Flushing” oil and refill with the SHC oil. (The approximate 5% remaining Polyglycol oil in the gearbox is acceptable).
 - Recommended Oil: **Mobile SHC 636** (Available through Glasstech)
 - Gearbox oil capacity: **3 liters**

Plug locations shown on next page for Nord Bender conveyor Helical Worm gearbox.

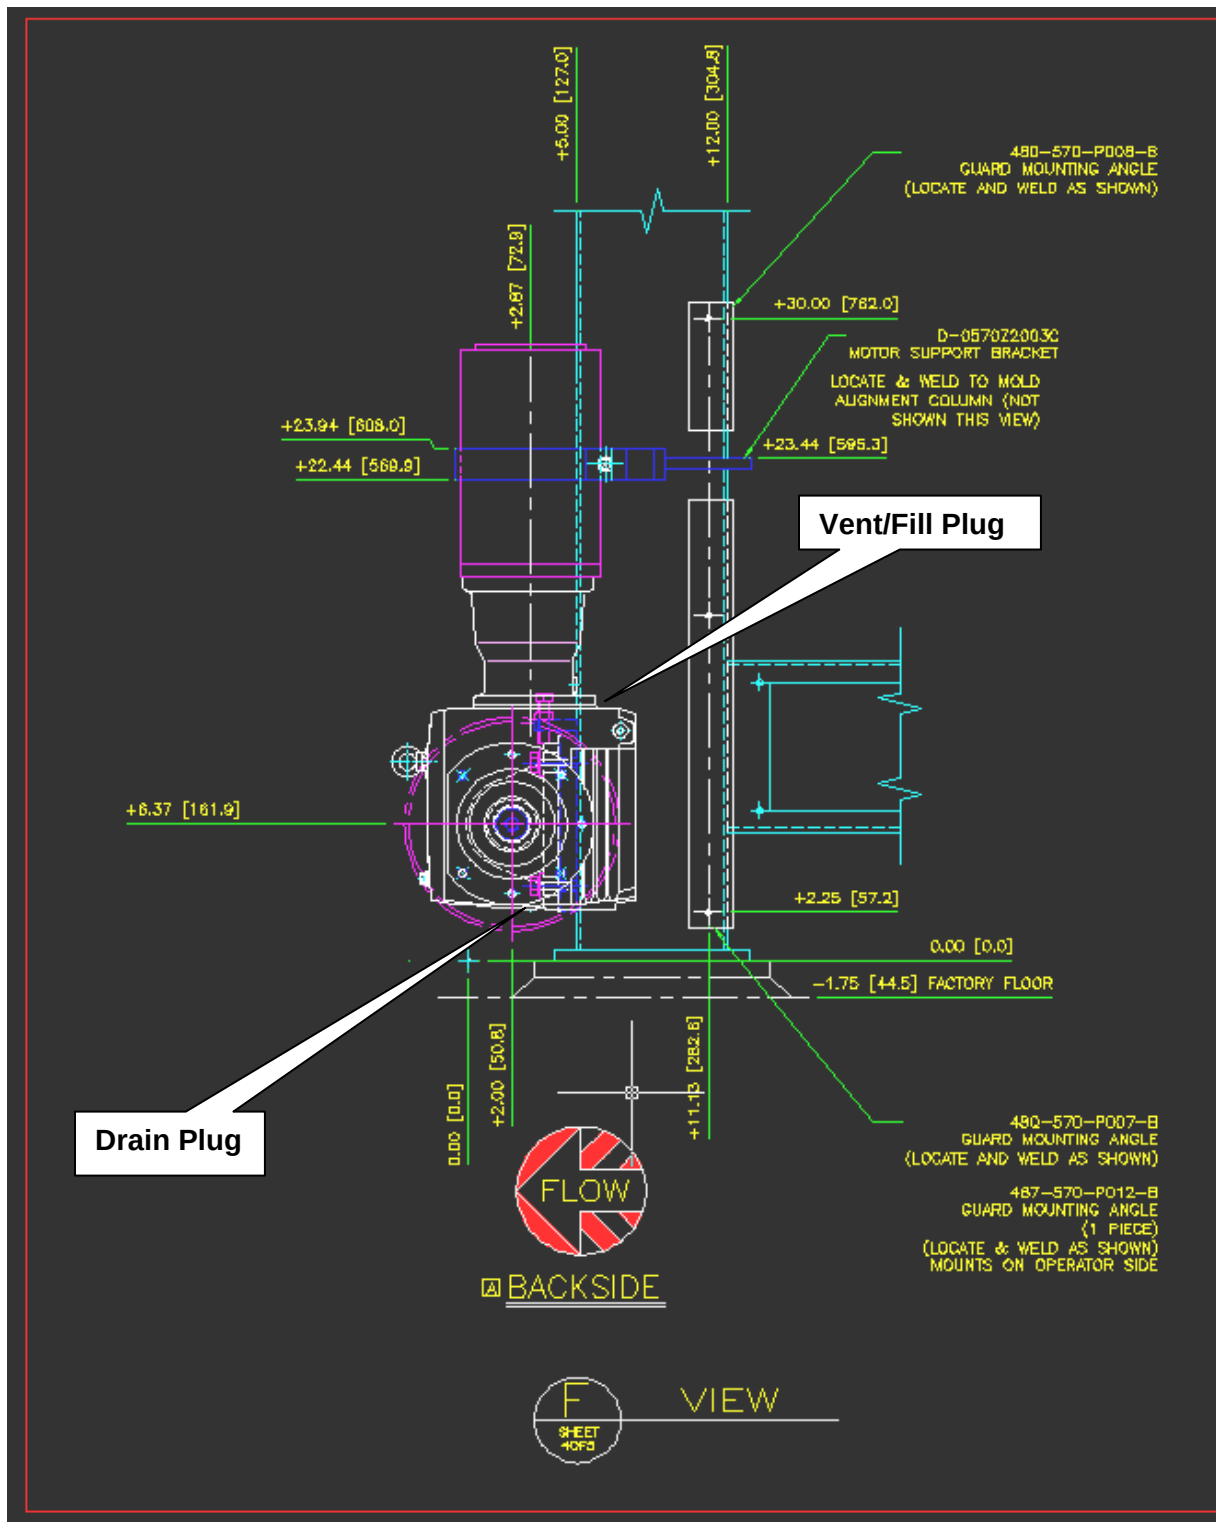

Locations of fill and drain plugs for bender conveyor helical worm gearbox