

glasstech, inc.

Service Bulletin

Customer Service Department

TELEPHONE: 419-661-9000 FAX: 419-661-9639


INTERNET: <http://www.glasstech.com>

Reference #053


Automotive Quench Blasthead Modification

The current design of your quench heads may allow them to be prone to a fatigue problem with the endplates on the outboard surface of the head, causing them to develop cracks. This problem is limited to the outside faces of the outside fins and is not present on other interior fins of the heads.

There is a triangular area of the outside of the quench fin that is currently free to "oilcan" as the head pressurizes and de-pressurizes. Glasstech has designed a stiffening plate (Glasstech part number D-0361Z2167C) that can be welded onto the faces of the existing heads. These plates can be fabricated using the following detail drawing (D-0361Z2167C) or and be provided by Glasstech by contacting Glasstech Customer Service. These plates are intended to be installed on both front and back sides of both upper and lower quench heads. If you have any questions please do not hesitate to contact Glasstech.

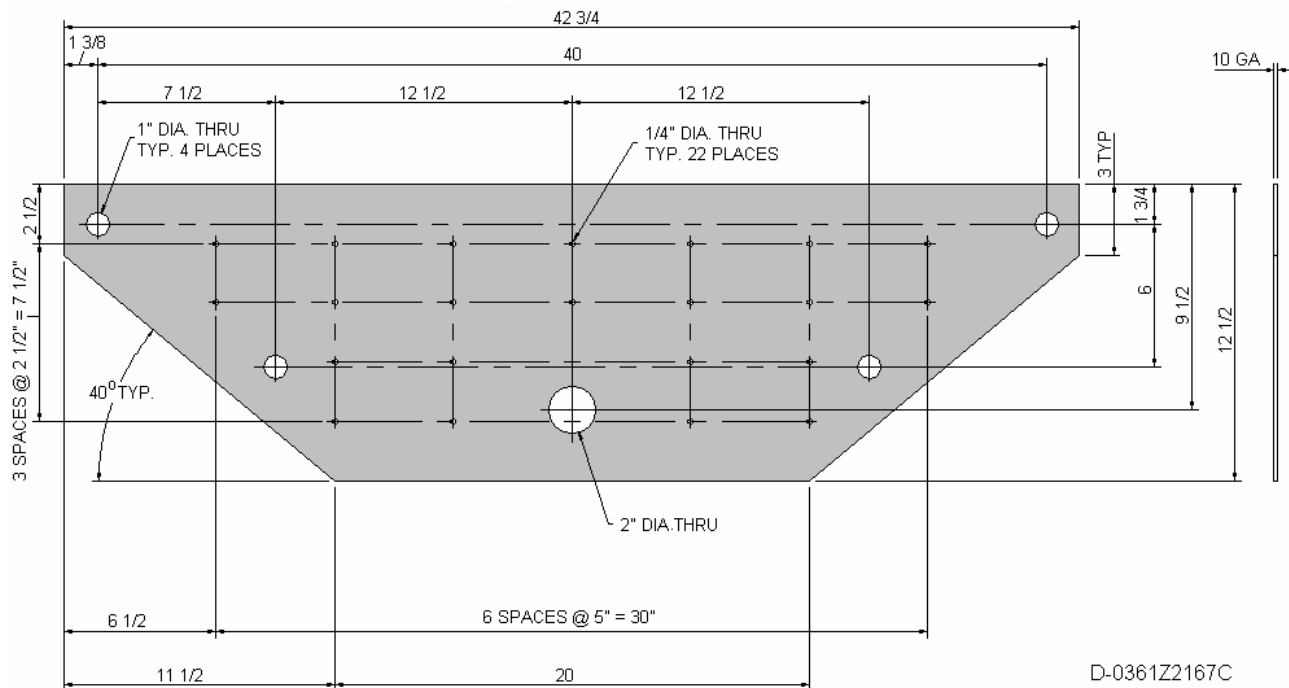

The following drawing illustrates the installation of this stiffener plate. (Reference Glasstech drawing number A-0360E40Z2003C)

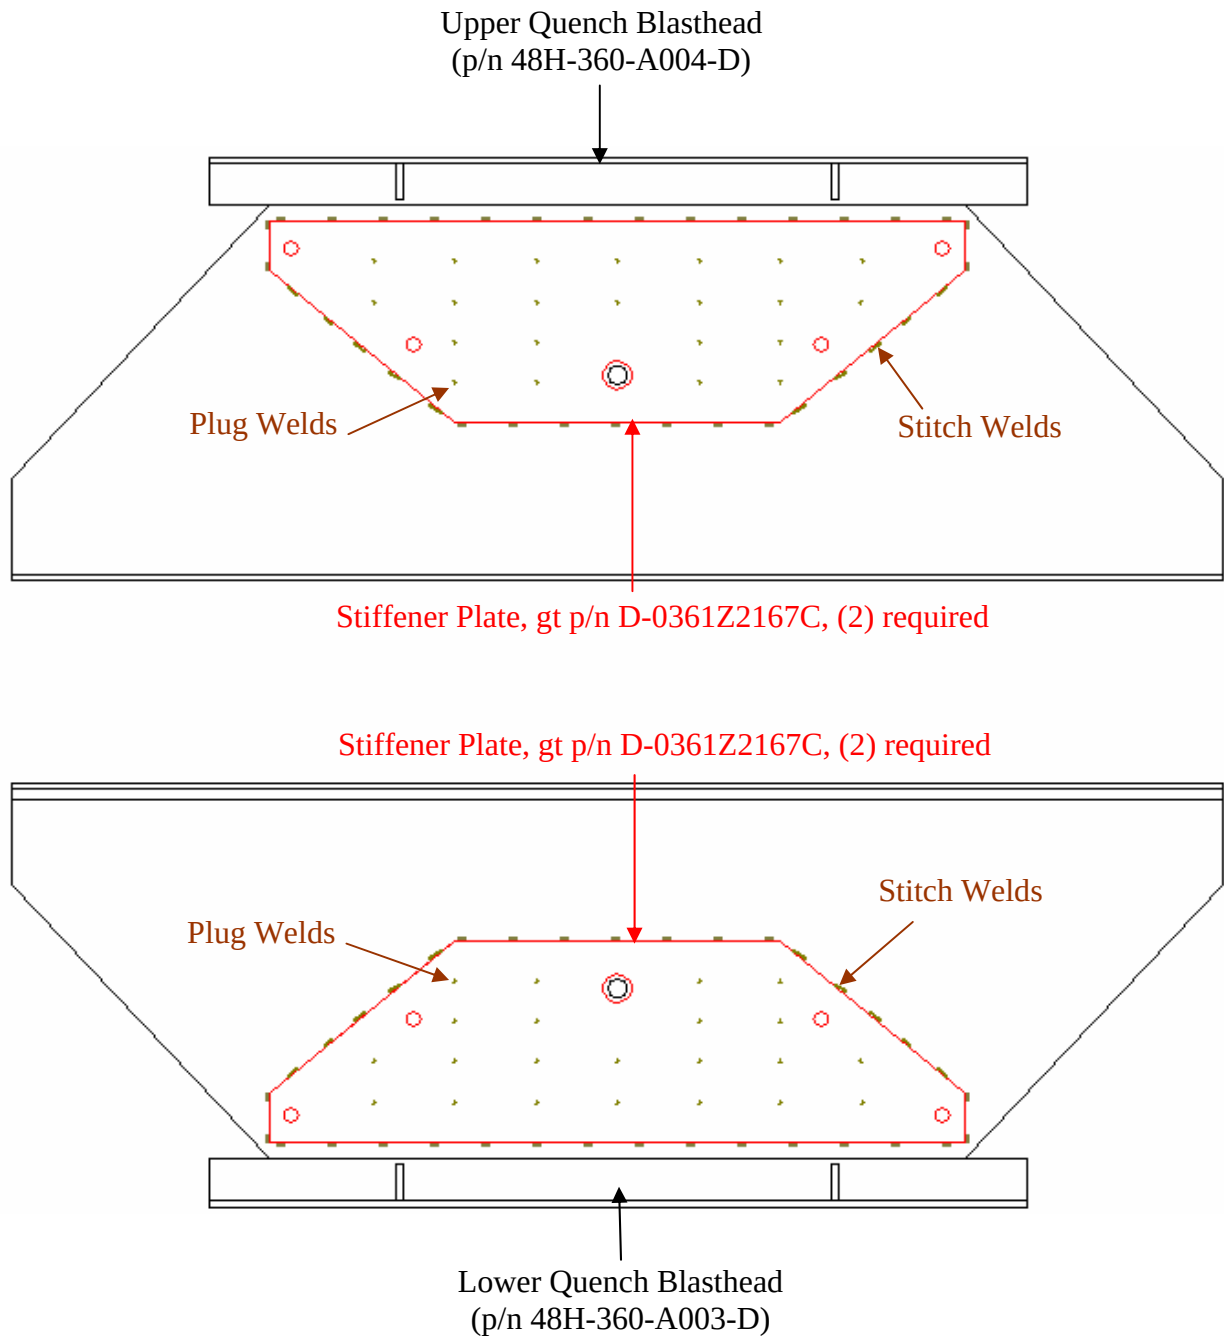

Notes:

1. One (1) inch stitch weld on four (4) inch centers around the entire parameter of the plate.
2. Twenty two (22) plug welds (per plate) are also required.
3. For preparing the surface for welding the stiffener plate, hold the plate on the side of the quench blasthead and mark the areas to be welded. Remove the plate then remove the paint for the weld locations. After the plate has been welded in place repaint the affected areas.