

CONTRACTOR SUBMITTAL TRANSMITTAL FORM REV. A

Owner: County of Hawaii
Contractor: Nan, Inc. **Project No.:** WW-4705R
Project Name: Hilo WWTP Phase 1 **Submittal Number:**
Submittal Title: For Information Only
TO:
From: Nan Inc.

Specification No. and Subject of Submittal / Equipment Supplier	
Spec:	Paragraph:
Authored By:	Date Submitted:

Submittal Certification	
Check Either (A) or (B): ☐ (A) We have verified that the equipment or material contained in this submittal meets all the requirements specified in the project manual or shown on the contract drawings with <u>no exceptions</u> . ☐ (B) We have verified that the equipment or material contained in this submittal meets all the requirements specified in the project manual or shown on the contract drawings <u>except</u> for the deviations listed.	
Certification Statement: By this submittal, I hereby represent that I have determined and verified all field measurements, field construction criteria, materials, dimensions, catalog numbers and similar data, and I have checked and coordinated each item with other applicable approved shop drawings and all Contract requirements.	
General Contractor's Reviewer's Signature: 	
Printed Name and Title:	
In the event, Contractor believes the Submittal response does or will cause a change to the requirements of the Contract, Contractor shall immediately give written notice stating that Contractor considers the response to be a Change Order.	
Firm:	Signature: Date Returned:

PM/CM Office Use
Date Received GC to PM/CM: Date Received PM/CM to Reviewer: Date Received Reviewer to PM/CM: Date Sent PM/CM to GC:

Nan, Inc

 PROJECT: HILO WWTP REHABILITATION
 AND REPLACEMENT PROJECT - PHASE 1

JOB NO. WW-4705R

 THIS SUBMITTAL HAS BEEN CHECKED BY
 THIS CONTRACTOR. IT IS CERTIFIED
 CORRECT, COMPLETE, AND IN
 COMPLIANCE WITH CONTRACT
 DRAWINGS AND SPECIFICATIONS. ALL
 AFFECTED CONTRACTORS AND
 SUPPLIERS ARE AWARE OF, AND WILL
 INTEGRATE THIS SUBMITTAL (UPON
 APPROVAL) INTO THEIR OWN WORK.

 DATE RECEIVED _____
 SPECIFICATION SECTION # _____
 SPECIFICATION _____
 PARAGRAPH _____
 DRAWING _____
 SUBCONTRACTOR _____
 SUPPLIER _____
 MANUFACTURER _____

CERTIFIED BY CQCM or Designee : _____



Submittal Review Response

Project Name: Hilo WWTP Rehabilitation and Replacement Project Phase 1
Submittal No.: 15230-003.0
Date: 9/25/2025

Client: County of Hawai'i Carollo Project No.: 203975
Contractor: Nan, Inc.
Submittal Name: Solvent Cement & Primer SUBMITTED
Reviewed By: Mason Drapesa-Morse, Adria Nyarko, Adrienne Fung

SUBMITTAL REVIEW

Review is for general compliance with contract documents. No responsibility is assumed by Carollo for correctness of quantities, dimensions, and details. No deviation or variation is approved unless specifically addressed in these review comments. Refer to Section 01330 for additional requirements. The Contractor shall assume full responsibility for coordination with all other trades and deviations from contract requirements.

Approved	☐	No Exceptions
	☐	Make Corrections Noted - See Comments
	☐	Make Corrections Noted - Confirm
Not Approved	☒	Correct and Resubmit
	☐	Rejected - See Remarks
Receipt Acknowledged	☐	Filed for Record
	☐	With Comments - Resubmit

Review Comments:

1. As a general comment, clearly mark submittal information to show all solvent cement and primer products that are to be selected per Sections 01330.1.07 and 15052-1.04.B.1.f.
2. Primers do not appear to be selected. Please mark submittal information to show primer products to be used per Section 15230.2.02.A.3.d.
3. Primer Type P70 and cement Type 724 do not appear to be selected. Please confirm those will be used for chemical service piping, per Section 15230.2.02.A.3.e.

All Solvent & Primer products Nan, Inc. chose to utilize for the pipes can be seen as marked.

Change incorporated: selected product is highlighted

Change incorporated: selected product is highlighted

**SPECIFICATION SECTION 15230:
PLASTIC PIPING & TUBING -
SOLVENT CEMENT**

SECTION 15230

PLASTIC PIPING AND TUBING

PART 1 GENERAL

1.01 SUMMARY

- A. Section includes: Plastic pipe, tubing, and fittings.

1.02 REFERENCES

- A. American Society of Mechanical Engineers (ASME):
1. B16.12 - Cast Iron Threaded Drainage Fittings.
- B. ASTM International (ASTM):
1. D1248 - Standard Specification for Polyethylene Plastics Extrusion Materials for Wire and Cable.
 2. D1784 - Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds.
 3. D1785 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80 and 120.
 4. D1869 - Standard Specification for Rubber Rings for Asbestos-Cement Pipe.
 5. D2241 - Standard Specification for Poly(Vinyl Chloride) (PVC) Pressure-Rated (SDR Series).
 6. D2412 - Standard Test Method for Determination of External Loading Characteristics of Plastic Pipe by Parallel-Plate Loading.
 7. D2466 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 40.
 8. D2467 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80.
 9. D2513 - Standard Specification for Thermoplastic Gas Pressure Pipe, Tubing and Fittings.
 10. D2564 - Standard Specification for Solvent Cements for Poly(Vinyl Chloride) (PVC) Plastic Piping Systems.
 11. D2665 - Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Drain, Waste, and Vent Pipe and Fittings.
 12. D2855 - Standard Practice for Making Solvent-Cemented Joints with Poly(Vinyl Chloride)(PVC) Pipe and Fittings.
 13. D3034 - Standard Specification for Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings.
 14. D3212 - Standard Specification for Joints for Drain and Sewer Plastic Pipes Using Flexible Elastomeric Seals.
 15. D3261 - Standard Specification for Butt Heat Fusion Polyethylene (PE) Plastic Fittings for Polyethylene (PE) Plastic Pipe and Tubing.
 16. D3350 - Standard Specification for Polyethylene Plastic Pipes and Fittings Materials.
 17. D4101 - Standard Specification for Polypropylene Injection and Extrusion Materials.

18. F438 - Standard Specification for Socket-Type Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 40.
 19. F439 - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80.
 20. F441 - Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe, Schedules 40 and 80.
 21. F477 - Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe.
 22. F493 - Standard Specification for Solvent Cements for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Pipe and Fittings.
 23. F645 - Standard Guide for Selection, Design and Installation of Thermoplastic Water-Pressure Piping Systems.
 24. F679 - Standard Specification for Poly(Vinyl Chloride) (PVC) Large-Diameter Plastic Gravity Sewer Pipe and Fittings.
 25. F714 - Standard Specification for Polyethylene (PE) Plastic Pipe (SDR-PR) Based on Outside Diameter.
- C. American Water Works Association (AWWA):
1. C900 - Standard for Polyvinyl Chloride (PVC) Pressure Pipe and Fabricated Fittings, 4 Inches to 12 Inches (100 mm Through 300 mm), for Water Transmission Distribution.
- D. NSF International (NSF).
- E. Plastics Pipe Institute (PPI):
1. TR 31 - Underground Installation of Polyolefin Piping.

1.03 ABBREVIATIONS

- A. ABS: Acrylonitrile-butadiene-styrene.
- B. CPVC: Chlorinated polyvinyl chloride.
- C. DR: Dimension ratio.
- D. DWV: Drain, waste, and vent.
- E. ID: Inside diameter of piping or tubing.
- F. NPS: Nominal pipe size followed by the size designation.
- G. NS: Nominal size of piping or tubing.
- H. PE: Polyethylene.
- I. PP: Polypropylene.
- J. PVC: Polyvinyl chloride.
- K. SDR: Standard dimension ratio; the outside diameter divided by the pipe wall thickness.

1.04 SUBMITTALS

- A. Submit as specified in Section 01330 - Submittal Procedures.
- ✓ B. Product data: As specified in Section 15052 - Common Work Results for General Piping.
- C. Shop Drawings:
 - 1. Describe materials, pipe, fittings, gaskets, and solvent cement.
 - 2. Installation instructions.

1.05 QUALITY ASSURANCE

- A. Plastic pipe in potable water applications: Provide pipe and tubing bearing NSF seal.
- B. Fusion machine technician qualifications: 1-year experience in the installation of similar PE piping systems from the same manufacturer.
- C. Mark plastic pipe with nominal size, type, class, schedule, or pressure rating, manufacturer and all markings required in accordance with ASTM and AWWA standards.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Protect piping materials from sunlight, scoring, and distortion.
- B. Do not allow surface temperatures on pipe and fittings to exceed 120 degrees Fahrenheit.
- C. Store and handle PE pipe and fittings as recommended by manufacturer in published instructions.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Extruding and molding material: Virgin material containing no scrap, regrind, or rework material except where permitted in the referenced standards.
- B. Fittings: Same material as the pipe and of equal or greater pressure rating, except that fittings used in drain, waste, and vent (DWV) piping systems need not be pressure rated:
 - 1. The definition of DWV piping systems on this project shall be limited to piping associated with toilets and sinks only.
- C. Unions 2-1/2 inches and smaller: Socket end screwed unions. Make unions 3 inches and larger of socket flanges with 1/8-inch full-face soft EPDM gasket.

2.02 PVC PIPING, SCHEDULE TYPE

A. Materials:

1. PVC Pipe: Designation PVC 1120 in accordance with ASTM D1785 and appendices:
 - a. Pipe and fittings: Extruded from Type I, Grade 1, Class 12454-B material in accordance with ASTM D1784.
 - b. PVC Pipe: Schedule 80 unless otherwise indicated on the Drawings or specified in the Piping Schedule in Section 15052 - Common Work Results for General Piping.
2. Fittings:
 - a. Supplied by pipe manufacturer.
 - b. Pressure fittings: In accordance with ASTM D2466 or ASTM D2467.
 - c. DWV fittings: In accordance with ASTM D2665.
- ✓ 3. Solvent cement: In accordance with ASTM D2564:
 - ✓ a. Manufacturers: The following or approved equal:
 - ✓ 1) IPS Corporation.
 - ✓ b. Certified by the manufacturer for the service of the pipe.
 - ✓ c. In potable water applications: Provide solvent cement listed by NSF 61 for potable water applications.
 - ✓ d. Primer: As recommended by the solvent cement manufacturer.
 - ✓ e. Chemical service: For CPVC or PVC pipe in chemical service, provide the following primer and cement, or approved equal:
 - ✓ 1) Primer: IPS Corp Type P70.
 - ✓ 2) Cement: IPS Corp Type 724 cement or another cement certified by the manufacturer for chemical service.
4. Coating:
 - a. Coat exposed piping as specified in Section 09960 - High-Performance Coatings.

2.03 PVC PIPING, CLASS TYPE

A. PVC pipe, Class Type: In accordance with AWWA C900:

1. Pressure Class: 150 with a minimum DR of 18.
2. Fittings: AWWA C900, DR18.
3. Joint design: Push-on or mechanical joint type as identified in Piping Schedule.
4. Gaskets: Neoprene in accordance with ASTM D1869 or ASTM F477.

2.04 CPVC PIPING

A. Materials:

1. CPVC pipe: Schedule 40 or Schedule 80, as specified in the Piping Schedule in Section 15052 - Common Work Results for General Piping, in accordance with ASTM F441 and Appendix, CPVC 4120:
 - a. Pipe: Extruded from Corzan Type IV, Grade 1, Class 24448 for sizes 8-inch and below and Class 23447 for sizes 8-inch and above material in accordance with ASTM D1784.
 - b. Manufacturers: One of the following:
 - 1) IPEX USA, LLC.
 - 2) GF Harvel.

2. Fittings: In accordance with ASTM F438 or ASTM F439 for pressure fittings, as appropriate to the service and pressure requirement:
 - a. Fittings: Supplied by the pipe manufacturer.
 - b. Manufacturers: One of the following:
 - 1) IPEX USA, LLC.
 - 2) Chemtrol.
3. Solvent cement: In accordance with ASTM F493:
 - a. Manufacturers: The following or approved equal:
 - 1) IPS Corporation.
 - b. Certified by the manufacturer for the service of the pipe.
 - c. Primer: As recommended by the solvent cement manufacturer.
 - d. In potable water applications: Provide solvent cement listed by NSF 61 for potable water applications.
 - e. For CPVC pipe in chemical service, provide the following primer and cement, or approved equal:
 - 1) Primer: IPS Corp Type P70.
 - 2) Cement: IPS Corp Type 724 cement or another cement certified by the manufacturer for high strength hypochlorite service.
 - f. Contractor to submit solvent cement and primer selections prior to use.
4. Coating:
 - a. Coat exposed piping as specified in Section 09960 - High-Performance Coatings.

2.05 PP PIPING

- A. Materials:
 1. Pipe: Schedule 40 dimensions, extruded from Type I-19509 material in accordance with ASTM D4101.
 2. Fittings: Molded from the same material and same laying length in accordance with ASME B 16.12:
 - a. Fittings: Manufactured by pipe manufacturer.
 3. Coating:
 - a. Coat exposed piping as specified in Section 09960 - High-Performance Coatings.

2.06 PE TUBING AND FITTINGS

- A. Materials:
 1. Small bore PE tubing: Black flexible virgin PE tubing, OD copper tubing size:
 - a. Plastic tubing ID as follows:
 - 1) For NS 1/4 inch, ID of 0.170 inch.
 - 2) For NS 5/16 inch, ID of 0.187 inch.
 - 3) For NS 3/8 inch, ID of 0.251 inch.
 - 4) For NS of 1/2 inch, an ID of 0.375 inch.
 2. Fittings: Compression fittings, Dekoron E-Z, or approved equal.
 3. Protective sheath:
 - a. Manufacturers: One of the following:
 - 1) Dekoron, "Poly-Cor."
 - 2) Parker Hannifin Corp./Fluid connector Products, Parflex® Division, Multitube.
 4. Plug-in fittings for connection to instruments: Brass quick-connect fittings.

2.07 POLYETHYLENE PIPING FOR DRAIN, WASTE, AND VENT PIPING SYSTEMS

- A. General:
 - 1. Pipe and fittings: High-density polyethylene.
 - 2. Dimensions of pipe and fittings: Based on controlled outside diameter in accordance with ASTM F714:
 - a. SDR: Maximum of 11.
- B. Manufacturers: One of the following:
 - 1. DuPont™, Sclairpipe®.
 - 2. Polaris, Dura-Tuff, Inc.
- C. Pipe, fittings, and adapters: Furnished by the same manufacturer, and compatible with components in the same system and with components of other systems to which connected.
- D. Materials:
 - 1. Polyethylene: In accordance with ASTM D1248, Type III, Class C, Category 5, Grade P34; listed by the Plastic Pipe Institute under the designation PE 3408; and have a minimum cell classification, in accordance with ASTM D3350.
 - 2. Pipe and fittings: Manufactured from material with the same cell classification.
- E. Coating:
 - 1. Coat exposed piping as specified in Section 09960 - High-Performance Coatings.

2.08 SOURCE QUALITY CONTROL

- A. PVC piping, Schedule Type:
 - 1. Mark pipe and fittings in accordance with ASTM D1785.
- B. PVC piping, Class Type:
 - 1. Hydrostatic proof testing in accordance with AWWA C900: Test pipe and integral bell to withstand, without failure, two times the pressure class of the pipe for a minimum of 5 seconds.
- C. CPVC piping:
 - 1. Mark pipe and fittings in accordance with ASTM F441.
- D. PP piping:
 - 1. Test samples and testing: Cut test samples of pipe, 6 inches long, from full length sections and test by the method outlined in accordance with ASTM D2412:
 - a. Deflect pipe at least 35 percent without failure. Stiffness at 5 percent deflection equals or exceeds 55 pounds per square inch after the test samples have been immersed in a 5 percent solution by weight of sulfuric acid and n-Heptane for a period of 24 hours prior to testing.
 - b. Failure is defined as rupture of the pipe wall.
 - c. Stiffness factor may be computed by the method outlined in accordance with ASTM D2412 or by dividing the load in pounds per linear inch by the deflection in inches and 5 percent deflection.

PART 3 EXECUTION

3.01 INSTALLATION

- A. General:
 - 1. Where not otherwise specified, install piping in accordance with ASTM F645, or manufacturer's published instructions for installation of piping, as applicable to the particular type of piping.
 - 2. Provide molded transition fittings for transitions from plastic to metal or IPS pipe. Do not thread plastic pipe.
 - 3. Locate unions where indicated on the Drawings, and elsewhere where required for adequate access and assembly of the piping system.
 - 4. Provide serrated nipples for transition from plastic pipe to rubber hose.
- B. Installation of PVC piping, Schedule Type:
 - 1. Solvent weld joints in accordance with ASTM D2855:
 - a. For PVC pipe in chemical service use IPS Corp. Type 724 cement and IPS Corp. Type P70 primer in accordance with manufacturer's instructions.
 - 2. Install piping in accordance with manufacturer's published instructions.
- C. Installation of PVC piping, Class Type:
 - 1. Install piping in accordance with the Appendix of AWWA C900 complemented with manufacturer's published instructions.
- D. Installation of CPVC piping:
 - 1. Clean dirt and moisture from pipe and fittings.
 - 2. Bevel pipe ends in accordance with manufacturer's instructions with chamfering tool or file. Remove burrs.
 - 3. Use solvent cement and primer formulated for CPVC:
 - a. For CPVC pipe in chemical service use IPS Corp. Type 724 cement and IPS Corp. Type P70 primer in accordance with manufacturer's instructions.
 - 4. Use primer on pressure and non-pressure joints.
 - 5. Do not solvent weld joints when ambient temperatures are below 40 degrees F or above 90 degrees F unless solvent cements specially formulated for these conditions are utilized.
- E. Installation of PP piping:
 - 1. Install piping in accordance with manufacturer's published instructions.
- F. Installation of polyethylene (PE) tubing and fittings:
 - 1. Install small bore PE tubing in accordance with manufacturer's printed instructions, in neat straight lines, supported at close enough intervals to avoid sagging, and in continuous runs wherever possible.
 - 2. Bundle tubing in groups of parallel tubes within protective sheath.
 - 3. Tubes within protective sheath may be color coded, but protect tubing other than black outside the sheath by wrapping with black plastic electrician's tape.
 - 4. Grade tubing connected to meters in one direction.

- G. Installation of PE piping for drain, waste, and vent:
1. Install piping as recommended in manufacturer's published instructions.

3.02 FIELD QUALITY CONTROL

- A. Test pipe as specified in Section 15052 - Common Work Results for General Piping and Section 15956 - Piping Systems Testing.
- B. Leakage test for PVC piping, Class Type:
1. Polyvinyl chloride (PVC) piping, Class Type: Subject to visible leaks test and to pressure test with maximum leakage allowance, as specified in Section 15956 - Piping Systems Testing.
 2. Pressure test with maximum leakage allowance: Perform test after backfilling:
 - a. Pressure: 125 pounds per square inch, gauge.
 - b. Maximum leakage allowance as follows, wherein the value for leakage is in gallons per 100 joints per hour:

NPS, Inches	1-1/2	2	2-1/2	3	4	6	8	10	12
Leakage	0.41	0.52	0.63	0.76	0.98	1.45	1.88	2.35	2.80

END OF SECTION

SOLVENT CEMENT PRODUCT DATA

WELD-ON®

LOW VOC



PRODUCT GUIDE

All Low VOC • All the Time

- Plastic Pipe Cements, Primers, and Cleaners
- Specialty Products
- Applicators and Accessories

OUR COMPANY

Established in 1954, **IPS® Corporation** has consistently grown over the past 60+ years. Today, we are the trusted leader in manufacturing solvent cements, adhesives, and components for the plumbing, construction and plastic fabrication industries. Our core brands include **WELD-ON®**, **WATER-TITE**, **TEST-TITE®**, **GUY GRAY™**, **TRUEBRO®**, and **STUDOR®**. Our quality products are manufactured with proven formulation and design using state-of-the-art equipment and manufacturing techniques.

Headquartered in California, **Weld-On, a division of IPS Corp.**, has operations throughout the United States, as well as China, and a worldwide network of sales representatives and distributors.

OUR COMMITMENT

Weld-On is committed to our customers in all aspects of our operation and in all functions of our company:

Quality products – We are committed to manufacturing quality products for professionals. In fact, our California facility is ISO 9001: 2008 certified for its excellent quality management system. Our products are manufactured to the highest standards available and face stringent quality control tests prior to sale and distribution.


Excellent customer service – Our skilled team is readily available to help customers with product selection and ordering. We are experts in international shipping and our international customer service staff is certified in hazardous material shipment.

Professional technical service – Our technical specialists provide professional recommendations and product application/ job-site installation training to suit the needs of our customers.

Expert R&D – Our research scientists and engineers have vast technical knowledge to develop the most technically advanced and innovative products to meet our customers' needs.



Our California facility takes pride in limiting volatile organic compound (VOC) emissions into the environment. Two regenerative thermo oxidizers are utilized to eliminate 99% of the VOC from our ventilation system before emitting air to the atmosphere.

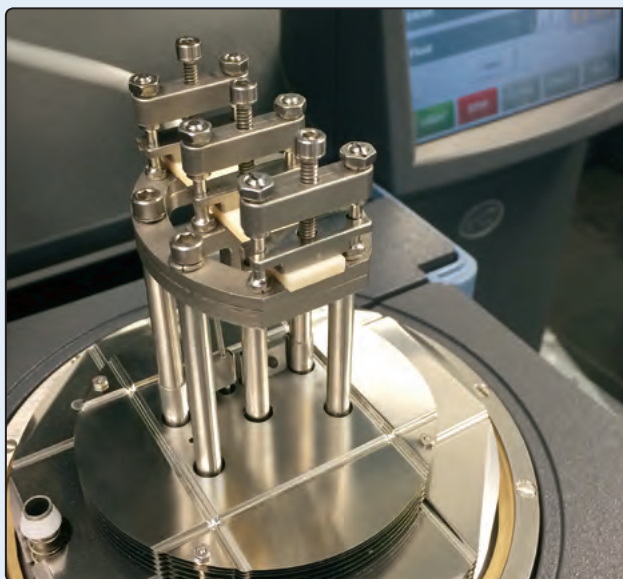


Our laboratory is equipped with state-of-the-art equipment to ensure that our formulations and product performance meet the most stringent testing standards.

WELD-ON® SOLVENT CEMENTS, PRIMERS, AND CLEANERS

Weld-On is the original innovator of solvent cements, primers and cleaners for PVC, CPVC, and ABS plastic piping systems. Our Weld-On® name is globally-recognized as **the premium brand** of products for joining plastic pipes and fittings. We are committed not only to providing the best product performance, but to do so in the **most environmentally-responsible** manner. All Weld-On solvent cements, primers and cleaners **meet the requirements for Low VOC (volatile organic compound) emission limits** established by the California South Coast Air Quality Management District (SCAQMD), one of the nation's strictest air quality regulatory bodies. Low VOC emissions contribute to cleaner air.



Advanced automated filling and packaging lines of Weld-On products ensure fast, efficient and accurate completion of product orders.

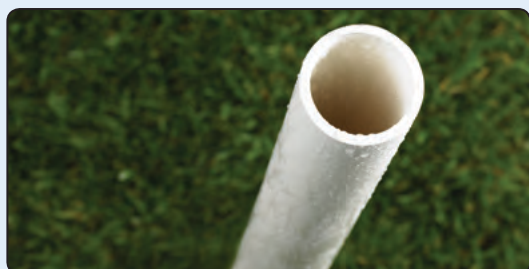

Weld-On's All Low VOC products provide the following benefits:

- **High Quality Performance** with excellent installation properties.
- **User Friendly.** Reduced fumes and odor for the comfort and well-being of pipe installers.
- **NSF, UPC, and/or CSA Listed.** Products are qualified for use in applications such as potable water, turf, irrigation, pool, industrial, fire protection, conduit, DWV and/or sewer.[†]
- **Meet ASTM Standards** for solvent cements and primers used for plastic pipe installation.[‡]
- **Environmentally Responsible. LEED® Compliant (Leadership in Energy and Environmental Design).** Credit can be earned for LEED Project by using Weld-On Low VOC products. This program, developed by the US Green Building Council, uses SCAQMD Rule 1168 as the benchmark for Low VOC products to earn one credit[#] toward LEED certification for green building.

Weld-On Products

Maximum VOC Emission (gram/liter)

Primer	550
PVC Solvent Cement	510
CPVC Solvent Cement	490
ABS Solvent Cement	325

[†]Refer to individual solvent cement and/or primer for specific ASTM Standards, NSF, UPC and/or CSA Listings.

[#]LEED Green Building Rating System For New Construction & Major Renovations Version 2.2 (Indoor Environmental Air Quality: EQ Credit 4.1 Low-Emitting Materials - Adhesives & Sealants)

We offer comprehensive technical assistance to our valued customers; a manned, not pre-recorded, technical hotline (1-877-477-8327) to help answer questions about our Weld-On products and techniques for solvent welding plastic pipe and fittings. Pipe joint installation seminars are also routinely provided. Just call our hotline to learn more.





WELD-ON® SELECTION GUIDE

Choose the right Weld-On products for your application based on the pipe diameter and material (PVC, CPVC, or ABS) being used. Refer to the charts below and see the product description on the following pages for details.

NOMINAL PIPE SIZE		in																		mm		
		1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	6	8	10	12	14	24	30					
WELD-ON PRODUCTS	PVC CEMENTS	REGULAR BODY	COLOR	PRODUCT																		
			CLEAR	700																		
			CLEAR	702																		
			CLEAR	710																		
		MEDIUM BODY	CLEAR	704 [†]																		
			GRAY	705 [†]	INDUSTRIAL GRADE																	
			GRAY	721 [†]																		
		HEAVY BODY	GRAY	711	INDUSTRIAL GRADE																	
			CLEAR	717																		
			GRAY	717																		
		EXTRA HEAVY BODY	GRAY	719	INDUSTRIAL GRADE																	
			WHITE	719																		
			SPECIALTY CEMENTS	AQUA BLUE	725 [†] WET'R DRY™																	
				CLEAR	727 [†] HOT'R COLD™																	
				BLUE to CLEAR	737 [†] TURF'N AG™																	
				BLUE to CLEAR	738 [†] HOT'N FAST™																	
				BLUE	750™ † HOTWELD																	
	CLEAR	795																				
	BLUE	795																				
	CPVC CEMENTS	REGULAR BODY	ORANGE	713	CTS ONLY																	
			YELLOW	FlowGuard ¹³ GOLD	CTS ONLY																	
		HEAVY BODY	ORANGE	714																		
			GRAY	714																		
		EXTRA HEAVY BODY	ORANGE	724 [°]	INDUSTRIAL GRADE																	
	GRAY		729	INDUSTRIAL GRADE																		
	ABS	MEDIUM BODY	MILKY	771	ALL CLASSES & SCHEDULES																	
			YELLOW	771																		
		EXTRA HEAVY BODY	BLACK	773	ALL CLASSES & SCHEDULES																	
	SPECIALTY	MEDIUM BODY	CLEAR	790*																		
			GREEN	794**	ALL CLASSES & SCHEDULES EXCEPT SCHEDULE 80																	
PRIMERS		MEDIUM BODY	PURPLE	P68																		
	CLEAR		P68																			
	PURPLE		P70	INDUSTRIAL GRADE																		
	CLEAR		P70																			
		AQUA BLUE	P75																			
		P75																				
NOMINAL PIPE SIZE		in																		mm		
		mm																				
		1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	6	8	10	12	14	24	30					

REGULAR BODIED CEMENT

for pipe size up to 4"

MEDIUM BODIED CEMENT

for pipe size up to 6"

HEAVY BODIED CEMENT

for pipe size up to 12"

EXTRA HEAVY BODIED CEMENT

for pipe size up to 30"

PIPE FORMAT

- ☐ Schedule 40/PN3.2, PN4, PN6
- ☒ Schedule 80/PN10, PN16

† Can be used without a primer on non-pressure systems with fittings having an interference fit (unless primer required by local code).

◇ For CPVC and PVC Chemical Piping Systems

^a FlowGuard Gold[®] is a registered trademark of the Lubrizol Corp.

* PVC and CPVC

** ABS to PVC Transition Joints

CTS: Copper Tube Size



PVC SOLVENT CEMENTS		Max Pipe Size (Interference Fit)	Set Time	Available Color	Industry Listing	Meets Following Performance Specification	Regular Bodied
	700™ PVC Excellent for irrigation, electrical conduit, pool & spa and plumbing, including PVC foam core pipe.	4" (110 mm) PVC Not for Schedule 80 – PN10 or higher	Fast	CLEAR	UPC NSF PW-G/DWV/SW	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61	
AVAILABLE SIZES Gallon (#10078), Quart (#10079), Pint (#10080), ½ Pint (#10081), ¼ Pint (#10082)							
	702™ PVC Excellent for DWV, irrigation, electrical conduit, pool & spa and plumbing, including PVC foam core pipe.	4" (110 mm) PVC Not for Schedule 80 – PN10 or higher	Fast	CLEAR	UPC NSF PW-G/DWV/SW	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61	
AVAILABLE SIZES Gallon (#10974), Quart (#10975), Pint (#10976), ½ Pint (#10977), ¼ Pint (#10978)							
	710™ PVC Specially formulated for irrigation piping. Suitable for electrical conduit, pool & spa and plumbing, including PVC foam core pipe.	2" (63 mm) PVC Not for Schedule 80 – PN10 or higher	Very Fast	CLEAR	UPC NSF PW-G/DWV/SW	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61	
AVAILABLE SIZES Gallon (#10111), Quart (#10112), Pint (#10113), ½ Pint (#10114), ¼ Pint (#10115)							
	704™ PVC - Quality formulation for irrigation, electrical conduit, pool & spa and plumbing, including PVC foam core pipe. - Can be used without primer on non-pressure systems if local codes permit.	6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC – PN 10 & 16	Fast	CLEAR GRAY	UPC NSF PW-G/DWV/SW NSF C US PW-G/DWV/SW (Gray Only)	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B137.3 CSA B181.2	
AVAILABLE SIZES CLEAR: Gallon (#12122), Quart (#12123), Pint (#12124), ½ Pint (#12125), ¼ Pint (#12126) GRAY: Gallon (#12127), Quart (#12128), Pint (#12129), ½ Pint (#12130), ¼ Pint (#12131)							
	705™ PVC INDUSTRIAL GRADE - High-strength formula for industrial, irrigation, DWV, electrical conduit, pool & spa and plumbing, including PVC foam core pipe. - Can be used without primer on non-pressure systems if local codes permit.	6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC – PN 10 & 16	Fast	CLEAR GRAY	UPC NSF PW-G/DWV/SW NSF C US PW-G/DWV/SW (Gray Only) SP (Gray Only)	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B137.3 CSA B181.2	
AVAILABLE SIZES CLEAR: Gallon (#10085), Quart (#10089), Pint (#10093), ½ Pint (#10097), ¼ Pint (#10100), ¾ Oz (#10103) GRAY: Gallon (#10086), Quart (#10090), Pint (#10094), ½ Pint (#10098), ¼ Pint (#10101)							
	721™ PVC - Premium, high-strength formulation for irrigation, DWV, pool & spa and plumbing. - Can be used without primer on non-pressure systems if local codes permit.	6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC – PN 10 & 16	Fast	BLUE	UPC NSF PW-G/DWV/SW	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61	
AVAILABLE SIZES Gallon (#10160), Quart (#10161), Pint (#10162), ½ Pint (#10163), ¼ Pint (#10849)							

PVC SOLVENT CEMENTS			Max Pipe Size (Interference Fit)	Set Time	Available Color	Industry Listing	Meets Following Performance Specification
Heavy Bodied		711™ PVC INDUSTRIAL GRADE - High-strength formula for large diameter pressure piping systems. - Good gap filling properties. - Medium set allows for more working time in warm weather.	12" (315 mm) PVC all classes & schedules	Medium		  	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B137.3 CSA B181.2
	AVAILABLE SIZES Gallon (#10117), Quart (#10119), Pint (#10121), ½ Pint (#10123)						
		717™ PVC - Quality formulation for plumbing, industrial, pool, irrigation and electrical piping systems. - Good gap filling properties. - Medium set allows for more working time in warm weather.	12" (315 mm) PVC all classes & schedules	Medium	 	  	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B137.3 CSA B181.2
AVAILABLE SIZES CLEAR: Gallon (#10141), Quart (#10144), Pint (#10147), ½ Pint (#10150), ¼ Pint (#10861) GRAY: Gallon (#10142), Quart (#10145), Pint (#10148), ½ Pint (#10151)							
Extra Heavy Bodied		719™ PVC INDUSTRIAL GRADE - Premium, high-strength formulation for large size industrial piping systems. - Ideal for fabrication of large fittings and applications requiring high gap filling properties. - Suitable for irrigation, conduit, other pressure and non-pressure applications.	30" (800 mm) PVC, all classes & schedules	Slow	 	  	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B137.3 CSA B181.2
	AVAILABLE SIZES WHITE: Gallon (#10155), Quart (#10157), Pint (#10159), 10.3 Oz (#12658) GRAY: Gallon (#13078), Quart (#10156)						
	PVC SPECIALTY SOLVENT CEMENTS						
Medium Bodied		725™ WET 'R DRY™ - Premium formula for wet conditions and/or quick pressurization. - Suitable for irrigation, plumbing, and pool & spa applications. - Can be used without primer on non-pressure systems if local codes permit.	6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC – PN 10 & 16	Extremely Fast		 	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61
	AVAILABLE SIZES Gallon (#10164), Quart (#10165), Pint (#10166), ½ Pint (#10167), ¼ Pint (#10850)						
		727™ HOT 'R COLD™ - Premium formula for all weather conditions (-15°F to 110°F / -26°C to 43°C). - Excellent for industrial, irrigation, electrical conduit, pool & spa and plumbing, including PVC foam core pipe. - Can be used without primer on non-pressure systems if local codes permit.	6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC – PN 10 & 16	Very Fast		 	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61
AVAILABLE SIZES Gallon (#10840), Quart (#10841), Pint (#10842)							
Medium Bodied		737™ TURF 'N AG™ - This high quality blue cement has a slightly higher viscosity making it ideal for turf and agricultural applications and excellent for PVC Well casing. - Blue color fades to clear in sunlight for cleaner looking joints. - Can be used without primer on non-pressure systems if local codes permit.	8" (200 mm) PVC 4" (110 mm) Schedule 80 PVC – PN 10 & 16	Very fast		 	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61
	AVAILABLE SIZES Gallon (#10988), Quart (#10989), Pint (#10990), ½ Pint (#11984), ¼ Pint (#11985)						

PVC SPECIALTY SOLVENT CEMENTS		Max Pipe Size (Interference Fit)	Set Time	Available Color	Industry Listing	Meets Following Performance Specification	Medium Bodied
	738™ HOT 'N FAST™ - High strength and fast setting speed make this cement ideal for irrigation, pool and plumbing. - For wet or quick pressurization conditions. - Blue cement fades to clear in sunlight for cleaner looking joints. - Can be used without primer on non-pressure systems if local codes permit.	6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC – PN 10 & 16	Very Fast		  PW-G/DWW / SW	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61	
AVAILABLE SIZES Gallon (#12245), Quart (#12246), Pint (#12247), ½ Pint (#12248)							
	750™ HOTWELD - Medium bodied and extremely fast setting speed make this cement ideal for irrigation, DWV, pool and spa, plumbing and non-pressure applications. - Works great in wet conditions. - Extremely hot, fast set-up blue cement. - Can be used without primer on non-pressure systems if local codes permit.	6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC – PN 10 & 16	Extremely Fast		  PW-G/DWW / SW	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61	
AVAILABLE SIZES Gallon (#13750), Quart (#13751), Pint (#13752), ½ Pint (#13753), ¼ Pint (#13754)							
	795™ PVC - Premium cement specially formulated for use on flexible and/or rigid PVC. - Forms flexible high-strength joints.	6" (160 mm) PVC 3" (90 mm) Schedule 80 PVC – PN 10 & 16	Fast	 	  PW-G/DWW / SW	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61	
AVAILABLE SIZES CLEAR: Gallon (#10278), Quart (#10280), Pint (#10281), ½ Pint (#10282), ¼ Pint (#10283) BLUE: Gallon (#11727), Quart (#11905)							
CPVC SPECIALTY SOLVENT CEMENTS							
	713™ CPVC - For potable water to 180°F (82°C). - Suitable for residential plumbing and industrial systems.	2" (63 mm) CPVC copper tube size	Fast		  PW-G/DWW / SW	ASTM D 2846 ASTM F 493 NSF/ANSI 14 NSF/ANSI 61	Regular Bodied
AVAILABLE SIZES Quart (#10126), Pint (#10127), ½ Pint (#10128), ¼ Pint (#10129)							
	FlowGuard Gold® - ONE STEP CEMENT. Formulated to be used without primer if local codes permit. - For potable water to 180°F (82°C). - Suitable for residential plumbing and industrial systems. - Approved by Lubrizol Advanced Materials, Inc. for use on FlowGuard Gold® Systems.	2" (63 mm) CPVC copper tube size	Fast		  PW-G/DWW / SW	ASTM D 2846 ASTM F 493 NSF/ANSI 14 NSF/ANSI 61 CSA B137.6	Medium Bodied
AVAILABLE SIZES Gallon (#11025), Quart (#11026), Pint (#11027), ½ Pint (#11028), ¼ Pint (#11029)							
	714™ CPVC - Industrial quality for non-chemical applications up to 180°F (82°C). - Approved for use on Corzan® CPVC piping systems.	12" (315 mm) CPVC, all classes & schedules	Medium	 	  PW-G/DWW / SW	ASTM D 2846 ASTM F 493 NSF/ANSI 14 NSF/ANSI 61 CSA B137.6	Heavy Bodied
AVAILABLE SIZES ORANGE: Gallon (#10130), Quart (#10132), Pint (#10135), ½ Pint (#10137) GRAY: Quart (#10131), Pint (#10134)							

CPVC SOLVENT CEMENTS		Max Pipe Size (Interference Fit)	Set Time	Available Color	Industry Listing	Meets Following Performance Specification
Heavy Bodied	 724™ CPVC INDUSTRIAL GRADE - Premium, high-strength, chemical-resistant solvent cement for use with CPVC and PVC piping systems carrying acids, bases, salts, and hypochlorites. - Approved for use on Corzan® CPVC piping systems.	12" (315 mm) CPVC and PVC, all classes & schedules	Medium	GRAY ORANGE	  PW-G/DWV/SW	ASTM F 493 NSF/ANSI 14 NSF/ANSI 61
	AVAILABLE SIZES ORANGE: Gallon (#12817), Quart (#12818) GRAY: Gallon (#12233), Quart (#11659), Pint (#11890)					
	Extra Heavy Bodied	 729™ CPVC INDUSTRIAL GRADE - Extra heavy body industrial quality cement for applications requiring high gap filling properties. Ideal for fabrication of large sized fittings. - May be used for chemical applications.	24" (600 mm) CPVC, all classes & schedules	Slow	GRAY	—
AVAILABLE SIZES Gallon (#10844), Quart (#10845)						

ABS SOLVENT CEMENTS						
Medium Bodied	 771™ ABS For plumbing applications (DWV, sewer & drain pipe), conduit and foam core.	8" (200 mm) ABS	Fast	MILKY YELLOW	 (Milky Only)  DWV/SW  C US DWV/SW (Yellow Only)	ASTM D 2235 NSF/ANSI 14 CSA B181.1
	AVAILABLE SIZES MILKY: Gallon (#10230), Quart (#10232), Pint (#10233) YELLOW: Gallon (#10965), Quart (#10966), Pint (#10967), ½ Pint (#10968), ¼ Pint (#10969) - Canada Only					
	 773™ ABS For plumbing applications (DWV, sewer & drain pipe), conduit and foam core.	8" (200 mm) ABS	Fast	BLACK	  DWV/SW	ASTM D 2235 NSF/ANSI 14
AVAILABLE SIZES Gallon (#10241), Quart (#10243), Pint (#10244), ½ Pint (#10245), ¼ Pint (#10246)						

TRANSITION & SPECIALTY SOLVENT CEMENTS						
Medium Bodied	 790™ MULTI-PURPOSE High-strength multi-purpose cement for PVC and CPVC pipe and fittings.	6" (160 mm) 4" (110 mm) Schedule 80- PN 10 & 16	Fast	CLEAR	—	—
	AVAILABLE SIZES Gallon (#11248), Quart (#10257), Pint (#10258), ½ Pint (#10259), ¼ Pint (#10260)					
	 794™ ABS - PVC - For use only on ABS to PVC transition joints in non-pressure systems. - Suitable for sewer, DWV and conduit.	6" (160 mm) Not for Schedule 80- PN 10 or higher	Fast	GREEN	  DWV/SW	ASTM D 3138
AVAILABLE SIZES Gallon (#10272), Quart (#10273), Pint (#10274), ½ Pint (#10275), ¼ Pint (#13369)						

PRIMERS & CLEANERS

Available
Color

Industry
Listing

Meet Following
Performance
Specification



P-68™ PRIMER

- Quality primer essential for proper softening and preparation of PVC and CPVC pipe and fitting surfaces.

CLEAR
PURPLE



ASTM F 656
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES

PURPLE: Gallon (#10208), Quart (#10210), Pint (#10212), ½ Pint (#10214), ¼ Pint (#10216)
CLEAR: Gallon (#10207), Quart (#10209), Pint (#10211), ½ Pint (#10213), ¼ Pint (#10215)



P-70™ PRIMER

INDUSTRIAL GRADE

- Premium industrial strength primer essential for proper softening and preparation of PVC and CPVC pipe and fitting surfaces.
- Specially recommended for use on Schedule 80 (PN 10 and higher) and large size pipe.
- Excellent for cold weather applications.

CLEAR
PURPLE



ASTM F 656
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES

PURPLE: Gallon (#10221), Quart (#10223), Pint (#10225), ½ Pint (#10227), ¼ Pint (#10229)
CLEAR: Gallon (#10220), Quart (#10222), Pint (#10224), ½ Pint (#10226), ¼ Pint (#10228)



P-75™ PRIMER

- Premium, fast acting, industrial strength primer essential for proper softening and preparation of PVC and CPVC pipe and fitting surfaces.
- Specially formulated for wet and/or quick set applications.

AQUA
BLUE



ASTM F 656
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES

Gallon (#10247), Quart (#10248), Pint (#10249), ½ Pint (#10250)



PC-64™ PRIMER/CLEANER

- For cleaning and surface preparation of PVC and CPVC pipe and fittings before bonding with solvent cements.

CLEAR
PURPLE

—

—

AVAILABLE SIZES

PURPLE: Gallon (#10871), Quart (#10872), Pint (#10873), ½ Pint (#10874), ¼ Pint (#10875)
CLEAR: Quart (#12656)



C-65™ CLEANER

- For removal of oil and grease from the surfaces of PVC, CPVC, ABS and STYRENE pipe and fittings for bonding.
- Recommended for use before priming of pipe and fittings.

CLEAR

—

—

AVAILABLE SIZES

Gallon (#10200), Quart (#10201), Pint (#10202), ½ Pint (#10203), ¼ Pint (#10204)

NOMINAL PIPE SIZE		in	½	¾	1	1¼	1½	2	2½	3	4	6	8	10	12	14	24	30		
		mm	20	25	32	40	50	63	75	90	110	160	200	250	315	355	600	800		
WELD-ON POOL & SPA PRODUCTS	PVC CEMENTS	REGULAR BODY	COLOR	PRODUCT																
			CLEAR	740 POOL REGULAR																
		MEDIUM BODY	CLEAR	744† POOL MEDIUM																
			GRAY																	
		HEAVY BODY	CLEAR	746 POOL HEAVY																
			GRAY																	
		SPECIALTY PRODUCTS	BLUE to CLEAR	747† POOL 'R SPA™																
			BLUE to CLEAR	748† POOL FAST™																
		PRIMER	PURPLE	Pool Primer																
			CLEAR																	

PIPE FOR

Sched

Sched

† Can be use
non-press
having an i
primer req

PIPE FORMAT

- Schedule 40/PN3.2, PN4, PN6
- Schedule 80/PN10, PN16

† Can be used without a primer on non-pressure systems with fittings having an interference fit (unless primer required by local code).



PVC POOL & SPA SOLVENT CEMENTS

PVC POOL & SPA SOLVENT CEMENTS		Max Pipe Size (Interference Fit)	Set Time	Available Color	Industry Listing	Meets Following Performance Specification
	740™ POOL REGULAR Regular bodied cement for pool & spa applications.	▪ 4" (110 mm) PVC	Fast	CLEAR	  PW-G/DWV/SW	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61
AVAILABLE SIZES Gallon (#13550), Quart (#13551), Pint (#13552), ½ Pint (#13553), ¼ Pint (#13652)						
	744™ POOL MEDIUM - Medium bodied cement for pool & spa applications. - Can be used without primer on non-pressure systems if local codes permit.	▪ 6" (160 mm) PVC ▪ 4" (110 mm) Schedule 80 PVC – PN 10 & 16	Fast	CLEAR GRAY	  PW-G/DWV/SW  US PW-GDWVSW (Gray Only)	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B137.3 CSA B181.2
AVAILABLE SIZES CLEAR: Gallon (#13554), Quart (#13555), Pint (#13556), ½ Pint (#13557), ¼ Pint (#13653) GRAY: Gallon (#13558), Quart (#13559), Pint (#13560), ½ Pint (#13561)						
	746™ POOL HEAVY Heavy bodied cement for pool & spa applications.	▪ 12" (315 mm) PVC ▪ 18" (480 mm) PVC (non pressure applications)	Medium	CLEAR GRAY	  PW-G/DWV/SW  US PW-GDWVSW (Gray Only)	ASTM D 2564 CSA B137.3 CSA B181.2 NSF/ANSI 14 NSF/ANSI 61
AVAILABLE SIZES CLEAR: Gallon (#13562), Quart (#13563), Pint (#13564), ½ Pint (#13565) GRAY: Gallon (#13566), Quart (#13567), Pint (#13568), ½ Pint (#13569)						
	747™ POOL 'R SPA™ - Medium bodied premium PVC cement specially formulated for pool & spa applications. - Ideal for wet or quick pressurization conditions. - Blue cement fades to clear in sunlight for cleaner looking joints. - Can be used without primer on non-pressure systems if local codes permit.	▪ 6" (160 mm) PVC ▪ 4" (110 mm) Schedule 80 PVC – PN 10 & 16	Extremely Fast	BLUE to CLEAR	  PW-G/DWV/SW 	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B45.10
AVAILABLE SIZES Gallon (#10851), Quart (#10852), Pint (#10853), ½ Pint (#10854), ¼ Pint (#10855)						
	748™ POOL FAST™ - Medium bodied high-strength and ultra fast setting cement; specially formulated for pool maintenance and repair. - For wet or quick pressurization conditions. - Blue cement fades to clear in sunlight for cleaner looking joints. - Can be used without primer on non-pressure systems if local codes permit.	▪ 6" (160 mm) PVC ▪ 4" (110 mm) Schedule 80 PVC – PN 10 & 16	Ultra Fast	BLUE to CLEAR	  PW-G/DWV/SW	ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61
AVAILABLE SIZES Gallon (#13655), Quart (#13342), Pint (#13343), ½ Pint (#13344), ¼ Pint (#13654)						
	POOL PRIMER™ Quality Low VOC primer essential for proper softening and preparation of PVC and CPVC pipe and fitting surfaces	—	—	PURPLE CLEAR	 (Purple Only)  PW-G/DWV/SW	ASTM F 656 NSF/ANSI 14 NSF/ANSI 61
AVAILABLE SIZES PURPLE: Gallon (#13570), Quart (#13571), Pint (#13572), ½ Pint (#13658), ¼ Pint (#13659) CLEAR: Gallon (#13574), Quart (#13575), Pint (#13576), ½ Pint (#13656), ¼ Pint (#13657)						

WELD-ON SOLVENT CEMENTS AND PRIMERS ACCESSORIES

Roll-A-Weld Rollers and Swabs



SuperSwab™

A sturdy easy-to-grip 4" swab for pipe diameter from 4" through 8". Adjustable length and dual cap design that fits quart and gallon containers. The swab tip is disposable and swab handle is reusable.

Individual Pack (#14108), **Bulk Pack** (#14111),
Replacement Swab Tip (#14109),
Replacement Swab Tip Bulk Pack (#14112)



7020

Jumbo Roll-A-Weld 7" roller for pipe diameters of 6" or larger; fits MT-648 gallon can and cements available in wide mouth cans. (#10008)



4020

4" swab for pipe diameters of 6" or larger; fits MT-648 empty gallon can and cements available in wide mouth cans. (#10009)



3020

Roll-A-Weld 3" roller for pipe diameters from 3" through 6"; fits MT-653 empty quart triple tight neck can. (#10007)



5020

4" swab for pipe diameters from 3" through 8"; fits standard quart can as well as MT-651 empty quart can. (#12071)



6020

Roll-A-Weld 4" roller for pipe diameters from 3" through 8"; fits standard quart can as well as MT-651 empty quart can. (#11957)



8020

4" cotton swab with wire handle for use on pipe diameter 6" or larger. (#13360)

APPLICATORS

Daubers



SuperDauber™

Fully adjustable, telescopic stem that fits quart, pint and ½ pint cans. Easy grip, ribbed handle allows better dauber control. Shed-resistant dauber material is better for smooth, full application of cement or primer. Available in ¾" (#10832) and 1¼" (#10833) dauber sizes.



Cap daubers

DH Daubers fit ¼ pint & ½ pint cans; DP daubers fit ½ pint & pint cans; DQ daubers fit quart cans. Available in ¾", 1", 1½", and 2" dauber sizes.

AVAILABLE SIZES

DH-38 (#13199) **DP-50** (#10003) **DP-75** (#10004)
DP-150 (#10005) **DQ-50** (#11831) **DQ-75** (#12429)
DQ-150 (#10006)

Brushes



PB-1

Plastic handle brush. Fits standard pint and quart cans. (#12121)



CM BCP Can-Mate®

Adjustable plastic handle. Natural bristle brush. Fits standard pint and quart cans. (#10963)



CST-36 Cable Saw

36" cable saw with T-Handle for cutting plastic pipe through 8" diameters. (#12739)



Empty Metal Cans

(dauber not included)

AVAILABLE SIZES

MT-648 Gallon can with 2½" neck (#10010)
MT-651 Quart can with 1¾" neck (#10012)
MT-653 Quart can with triple tight neck (paint style) (#10014)
MT-654 Pint can with 1¾" neck (#10015)

ACCESSORIES



Can-Tote Cement & Primer Carrier

For carrying quart and pint cans.

6 pack (#14147)
24 pack (#12891)



Professional Hand Cleaner Wipes

Advanced hand cleaner disposable wipes for removing residual solvent cements (PVC, CPVC, ABS), primers & sealants. Also removes dirt, oil, grease and much more. (#12762)



DEB-2 Deburring Tool

For PVC, CPVC, ABS, PE & PB pipe from ½" through 2" IPS. (#12079)



Mounted Power Beveling Tool

For beveling the ends of small diameter plastic pipe (PVC, CPVC, ABS). Nominal pipe sizes ½" CTS - 3" IPS. (#12863)



Pipe and Fitting Pullers

For installation of large diameter plastic pipe and fittings (PVC, CPVC, ABS). Available for pipe and fittings sizes 4" - 12" diameter (#12816) and 14" - 20" diameter (#12815). Lightweight, durable and can easily be operated by one person.



SOLVENT CEMENTS SET/CURE TIMES AND APPLICATOR GUIDE

Average Initial Set Schedule For WELD-ON® PVC/CPVC Solvent Cements**

Temperature Range	Pipe Sizes				
	½" to 1¼" (20mm to 40mm)	1½" to 2" (50mm to 63mm)	2½" to 8" (75mm to 200mm)	10" to 15" (250mm to 380mm)	15"+ (380mm +)
60°-100°F/16°-38°C	2 minutes	5 minutes	30 minutes	2 hours	4 hours
40°-60°F/5°-16°C	5 minutes	10 minutes	2 hours	8 hours	16 hours
0°-40°F/-18°-5°C	10 minutes	15 minutes	12 hours	24 hours	48 hours

Note - Initial set schedule is the necessary time to allow before the joint can be carefully handled. In damp or humid weather allow 50% more set time.

Average Joint Cure Schedule For WELD-ON PVC/CPVC Solvent Cements**

Relative Humidity 60% or less	Pipe Sizes							
	½" to 1¼" (20mm to 40mm)		1½" to 2" (50mm to 63mm)		2½" to 8" (75mm to 200mm)		10" to 15" (250mm to 380mm)	15"+ (380mm +)
Temperature range during assembly and cure periods	up to 160 psi/ 11 Bar	160 to 370 psi/ 11 to 26 Bar	up to 160 psi/ 11 Bar	160 to 315 psi/ 11 to 22 Bar	up to 160 psi/ 11 Bar	160 to 315 psi/ 11 to 22 Bar	up to 100 psi / 7 Bar	up to 100 psi / 7 Bar
60°-100°F/16°-38°C	15 min	6 hrs	30 min	12 hrs	1½ hrs	24 hrs	48 hrs	72 hrs
40°-60°F/5°-16°C	20 min	12 hrs	45 min	24 hrs	4 hrs	48 hrs	96 hrs	6 days
0°-40°F/-18°-5°C	30 min	48 hrs	1 hour	96 hrs	72 hrs	8 days	8 days	14 days

Note - Joint cure schedule is the necessary time to allow before pressurizing system. In damp or humid weather allow 50% more cure time.

** These figures are estimates based on testing done under laboratory conditions. Field working conditions can vary significantly. This chart should be used as a general reference only.

Average Number of Joints/Quart (1Kg) of WELD-ON Cement*

Pipe Diameters	½" / 20mm	¾" / 25mm	1" / 32mm	1½" / 50mm	2" / 63mm	3" / 90mm	4" / 110mm	6" / 160mm	8" / 200mm	10" / 250mm	12" / 315mm	15" / 380mm	18" / 450mm
Number of Joints	300	200	125	90	60	40	30	10	5	2-3	1-2	¾	½

Note - For Primer: Double the number of joints shown for cement.

* These figures are estimates based on our laboratory tests. Due to the many variables in the field, these figures should be used as a general guide only. **Note: 1 Joint = 1 Socket**

Pipe Size Equivalent Chart - Inches/Millimeters

in.	½"	¾"	1"	1¼"	1½"	2"	2½"	3"	4"	6"	8"	10"	12"	14"	18"	24"	30"
mm.	20	25	32	40	50	63	75	90	110	160	200	250	315	355	450	600	800

WELD-ON APPLICATOR SELECTION GUIDE

Weld-On solvent cements are packaged with can-lid daubers: ¾" dauber on quarter pint and half pint cans and 1½" dauber on pint and quart cans. For proper solvent welding of pipe and fittings, the cement applicator **must** be no less than half the size of the pipe. See the following charts for applicator (daubers, swabs, and rollers) recommendations pertaining to pipe size.

DAUBERS	Pipe Diameters						
	¼"	½"	¾"	1"	1¼"	1½"	2"
¾" Dauber	•	•	•				
½" Dauber			•	•			
¾" Dauber					•	•	
1½" Dauber							•
ROLLERS & SWABS				SIZE		FOR PIPE DIAMETERS	
3020				3" Roller		3" - 6"	
6020				4" Roller		3" - 8"	
7020				7" Roller		6"+	
4020				4" Swab		6"+	
5020				4" Swab		3" - 8"	
8020				4" Swab		6"+	
SuperSwab™				4" Swab		4" - 8"	

PRODUCT SHELF LIFE

Weld-On Products	Shelf-life	Weld-On Products	Shelf-life
Primers / Cleaners	3 years	CPVC Solvent Cement	2 years
PVC Solvent Cement	3 years	ABS Solvent Cement	3 years

SPECIALTY PRODUCTS

Weld-On® offers extensive specialty products to meet your plumbing needs.

- **Repair and fabrication adhesives** are great for repairing cracks, leaky pipe valves and fittings. These adhesives are also great for pipe fabrication because of their excellent gap-filling properties.
- **Weld-On® pipe thread sealant** product line is the best in the industry, sealing and lubricating metal and plastic pipe threads. These sealants work well on pipelines conveying various materials from compressed gas to corrosive liquids.
- **Joint compounds** set and seal plumbing fixtures, drains, as well as pipe threads.
- **Joint lubricants** are excellent for lubricating valves and gasketed joints.
- **Cutting oils** are used for cutting and threading ferrous and non-ferrous metal pipes.

Please refer to the individual product description for additional details.

REPAIR AND FABRICATION ADHESIVES

The following Weld-On adhesives have Low VOC emissions per SCAQMD Rule 1168. Use of these products can qualify for one credit in the LEED® Green Building Rating System – Indoor Environmental Quality.

		Applicable for use with	Viscosity	Set Time	Color	Shelf Life
 810™ ▪ Thick syrupy, two-component, high strength reactive adhesive. ▪ Product can withstand very high pressures and is high impact resistant. Great for repairing cracks or leaky pipe valves and fittings. ▪ Excellent gap-filling properties. Ideal for fabricating fittings and joining saddles to pipe. Good for bonding large diameter PVC and CPVC pipe and fittings.		▪ PVC ▪ ABS ▪ Acrylic ▪ Clay ▪ Concrete ▪ CPVC ▪ Styrene ▪ FRP (fiberglass-reinforced polyester)	40,000 cps	1 hour	WHITE	1 year
AVAILABLE SIZES Gallon (#10810), Quart (#10811), Pint (#10812), 4 Oz (#10813)						
 811™ ▪ Thick syrupy, two-component, high strength reactive adhesive. Same formula as 810, but different packaging format. ▪ Product can withstand very high pressures and is high impact resistant. Great for repairing cracks or leaky pipe valves and fittings. ▪ Excellent gap-filling properties. Ideal for fabricating fittings and joining saddles to pipe. Good for bonding large diameter PVC and CPVC pipe and fittings. ▪ Conveniently packaged in a dual cylinder cartridge for easy dispensing and application to the bonding surfaces. ▪ See below for accessories.		▪ PVC ▪ ABS ▪ Acrylic ▪ Clay ▪ Concrete ▪ CPVC ▪ Styrene ▪ FRP (fiberglass-reinforced polyester)	40,000 cps	1 hour	WHITE	1 year
AVAILABLE SIZES 470mL (#10985)						
 845™ ▪ Highly viscous, two-component, high strength, reactive adhesive. ▪ Product can withstand very high pressure and large temperature range (-30°F / -35°C to 200°F / 93°C). It is also impact resistant and can be used in wet conditions. ▪ Excellent gap-filling properties. Ideal for fabricating fittings and joining saddles to pipe. Good for bonding large diameter PVC and CPVC pipe and fittings. ▪ Conveniently packaged in a dual cylinder cartridge for easy dispensing and application to the bonding surfaces. ▪ See below for accessories.		▪ PVC ▪ ABS ▪ Acrylic ▪ Concrete ▪ CPVC ▪ Fiberglass ▪ FRP (fiberglass-reinforced polyester)	400,000 cps	30 mins.	TAN	1 year
AVAILABLE SIZES 400mL (#12759), 43mL (#12709 - 12-pack; #14094 - 4-pack), 43mL Starter Kit (#12711)						

ADHESIVE ACCESSORIES

 811 Dispensing gun and mixing tips ▪ Manual or pneumatic dispensing gun for convenient application of Weld-On 811 dual cartridge, high strength adhesive. ▪ Straight mixing tip provides even blending of the two adhesive components prior to application.	 845 Dispensing gun and mixing tips ▪ Manual or pneumatic dispensing gun for convenient application of Weld-On 845 dual cartridge, high strength adhesive. ▪ Straight mixing tip provides even blending of the two adhesive components prior to application.
AVAILABLE SIZES Manual gun (#14150) Pneumatic gun (#11199) Mixing tip (#14080)	AVAILABLE SIZES 400mL: Manual gun (#14151) Metal frame manual gun (#14152) Mixing tip (#14040) 43mL: Manual gun (#12471), mixing tip (#14077)

PIPE THREAD SEALANTS

All Weld-On® pipe thread sealants are lead free, odor free, non-staining, applicable in a large temperature range, can be immediately pressurized, easy to clean and have a creamy texture that packs well between pipe threads for a better seal.

	Industry Listing	Pressure Rating (PSI) Liquids Gases		Temperature Range	Color	Shelf-life
 All Seal™ MULTI-PURPOSE SEALANT ▪ Slow drying, soft-setting formula allows ample time to work with pipe joints. Also easy for disassembly. ▪ Creamy, non-separating consistency provides excellent thread coverage. ▪ Product is grit-free to provide leak-proof seal on pipe threads. ▪ For sealing and lubricating all metal and plastic (ABS, PVC, CPVC, Polypropylene, & Nylon) piping systems carrying various materials.¹ ▪ Very low VOC content: 152 g/L.	 PW/DWW/SW 	6,000	3,000	-50°F to 455°F	BEIGE	2 year
AVAILABLE SIZES Pint (#87670), 1/2 Pint (#87665), 1/4 Pint (#87660)						
 Blue Seal™ INDUSTRIAL GRADE SEALANT ▪ Heavy duty, grit-free formula. Excellent for industrial applications and pipe lines in high vibration environments. ▪ Contains finely homogenized PTFE particles for filling cracks and thread imperfections – ensuring a leak-proof seal. ▪ For sealing and lubricating all metal and plastic (ABS, PVC, CPVC, Polypropylene, & Nylon) piping systems carrying various materials.¹ ▪ Tested and approved for addition to the FBC System compatible program for use with FlowGuard Gold®, BlazeMaster®, and Corzan® CPVC plastic piping systems. ▪ No VOC content. 	 PW/DWW/SW 	10,000	3,000	-50°F to 455°F	BLUE	3 year
AVAILABLE SIZES Quart (#87695), Pint (#87690), 1/2 Pint (#87685)						
 White Seal™ Plus MULTI-PURPOSE SEALANT WITH PTFE ▪ Contains finely homogenized PTFE particles for filling cracks and thread imperfections – ensuring a leak-proof seal. ▪ Non-setting formula allows easy disassembly of joints without damage to pipe, fittings or threads. Protects threaded areas from rust and corrosion and prevents galling. ▪ For sealing and lubricating all metal and plastic (ABS, PVC, CPVC, Polypropylene, & Nylon) piping systems carrying various materials.¹ ▪ Tested and approved for addition to the FBC System compatible program for use with FlowGuard Gold®, BlazeMaster®, and Corzan® CPVC plastic piping systems. ▪ No VOC content. 	 PW/DWW/SW 	10,000	3,000	-50°F to 455°F	WHITE	3 year
AVAILABLE SIZES Quart (#87740), Pint (#87735), 1/2 Pint (#87730), 1/4 Pint (#87725)						
 505 Key Tite™ METAL PIPE SEALANT ▪ Special formulation seals and lubricates metal pipe joints as well as protects them from rusting and seizing. ▪ Applicable for all types of metal joints (threaded, flanged or gasketed). ▪ For sealing and lubricating all metal piping systems carrying various materials.²	—	Dependent on pressure rating of the piping systems	-50°F to 450°F	GREEN	1 year	
AVAILABLE SIZES Gallon (#10062), Quart (#10063), Pint (#10064), 1/2 Pint (#10068), 1/4 Pint (#10069)						

¹ All Seal, Blue Seal, and White Seal can be used on **metal and plastic** piping systems carrying: air & gases (compressed, manufactured or natural), ammonia, brine, acid (diluted), caustic alkalis (diluted), corrosives, freons, fuel (diesel, gasoline, jet fuel, and kerosene), oils, petroleum, propane, solvents, steam, sugar, and water. Not recommended for oxygen, fluorine, or liquid sodium systems.

² 505 Key Tite can be used on **metal** piping systems carrying: acids (diluted), air (compressed or gaseous), alcohols, alkalis (diluted), brine, caustics (diluted), gases (manufactured or natural), low pressure steam lines, sugar (liquid), and hot or cold water.

JOINT COMPOUNDS

In addition to our premium Weld-On® sealants, we also offer a cost-effective sealant alternative - our joint compounds. They are semi-solid, lead-free, non-toxic, and also provide effective seals to plumbing fixtures & drains, as well as pipe threads.



Soft Seal Plumber Putty

- For setting and sealing plumbing fixtures and drains. Will not harden, crack or crumble.
- Complies with Federal Specification TT-P-1536A.
- Lead-free, non-corrosive and stainless.
- 100% water-proof.

AVAILABLE SIZES 5 LB. (#80105), 3 LB. (#80103), 14 Oz. (#80100)



Epoxy Putty Stick

- Quick hardening sealant/adhesive.
- Plugs, seals, patches or repairs most materials.
- Excellent for underwater repairs.
- Hardens in 20 minutes and cures in 1 hour.
- Non-toxic, safe for potable water line.

AVAILABLE SIZES 4 Oz (#84055)



Pipe Stick Joint Compound

- Thread sealant for metal and plastic pipe.
- Prevents rust and corrosion allowing easier disassembly.
- Lead-free and non-toxic.

AVAILABLE SIZES 1.3 Oz (#81255)



Thread Seal Tape

- Contains PTFE.
- Complies with MIL-T-27730A specifications.
- Available in various colors, widths and lengths.

AVAILABLE SIZES: 1/2" x 260" White (#80315), 1/2" x 520" White (#80310), 3/4" x 260" White (#87750), 3/4" x 520" White (#87755), 1" x 520" White (#87720), 1/2" x 260" Yellow Gas Line (#80320), 1/2" x 260" Pink Extra Duty (#80325)

JOINT LUBRICANTS

Weld-On joint lubricants are non-toxic, non-corrosive and can be easily washed out of piping systems.



EZ Flush Pipe Lubricant

- Applicable for joining all metal and plastic gasketed pipes.
- Lubricates slip-on or "O" ring type joints without harming rubber or plastic gaskets.
- Easily flushes out of piping system.
- Non-toxic and non-corrosive. No taste or odor.



AVAILABLE SIZES 5 Gallon (#87721), Gallon (#87719), Quart (#87718), Pint (#87717)



Seal Lube Gasket Lubricant

- Primes and lubricates slip-on or "O" ring type joints with rubber or synthetic rubber gaskets.
- Non-toxic and non-corrosive. No taste or odor.
- 100% water soluble.



AVAILABLE SIZES Gallon (#87715), Quart (#87710), Pint (#87705)



Slik Seal Plumber Grease

- For lubricating valve stems.
- 100% water-proof.

AVAILABLE SIZES 1 Oz. (#80427)

CUTTING OILS

Weld-On offers two types of cutting oil for use on metal pipe threading, cutting and other machines.



Light Cutting Oil

- For light duty manual or low rpm threading machines as well as for drilling, reaming and rolling machines using ferrous and non-ferrous metals.

AVAILABLE SIZES Gallon (#80425), Quart (#80424)



Dark Cutting Oil

- High-grade oil blend.
- For medium to heavy duty cutting, threading, drilling, reaming and rolling machines using ferrous and non-ferrous metals.

AVAILABLE SIZES 5 Gallon (#80422), Gallon (#80421), Quart (#80420), Pint (#80415)

WELD-ON® – THE TRUSTED BRAND FOR JOINING PLASTIC PIPE, VALVES, AND FITTINGS IN ANY INDUSTRY



All Low VOC • All the Time



455 W. Victoria Street, Compton, CA 90220 U.S.A.
Tel: 310.898.3300 • Fax: 310.898.3392
Customer Service: 800.888.8312
www.weldon.com



Lit. #230103

© 2016 IPS IC 01/16