
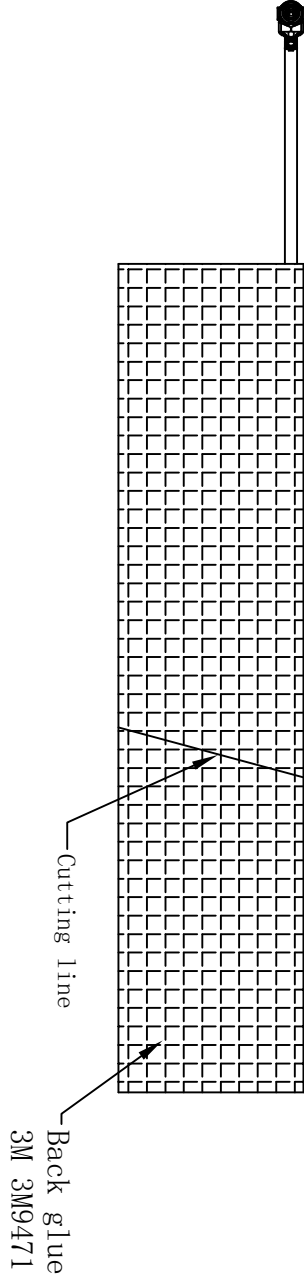


REV	DESCRIPTION	AUTHOR	DATE
X3	Pattern change	Kenny	20210224
X4	Pattern change	Kenny	20210319
X5	Detail change	Bailey	20240703

ROHS

Pad area

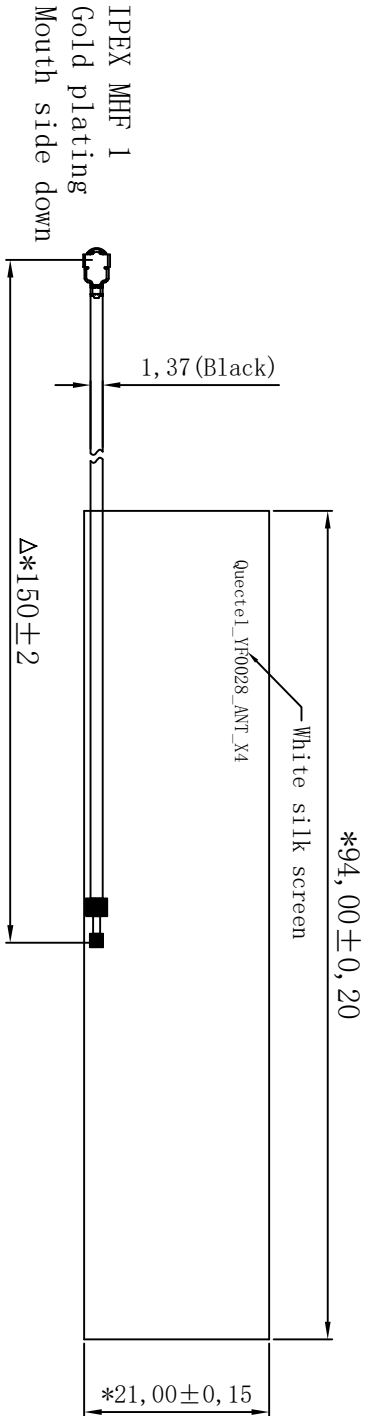

Notes:

- * is the key dimension;
- Material: FPC: 0.5mil PI, 0.5oz; ADH: 3M9471
- Cable: $\phi 1.37$ black low loss cable with IPEX MHF 1;
- Ink color: black, Silk screen color: white;
- PADplating: OSP (Salt spray requirements 48H) ;
- Working temperature: $-40^{\circ}+85^{\circ}\text{C}$;
- Separation force of connector and cable: 15N Min;
- No damage, glue overflow, ink falling off, PAD dirt, line disconnection and other defects;
- Packaging requirements: refer to packaging specification;
- Comply with ROHS2.0 and REACH

QUECTEL® Build a Smarter World				Part Name: YF0028AA_ANT			
上海移远通信技术股份有限公司				OC:			
0-10	± 0.05	DRAWN	Bailey	REV X5			
10-30	± 0.10	CHKD	Kenny				
30-80	± 0.15	APPD	Kevin				
≥ 80	± 0.20	DATE	2024.07.04	Third	Unit	Size	Scale
Angle	$\pm 1^{\circ}$				mm	A4	1:1
Tolerance				Sheet 1 of 1			