
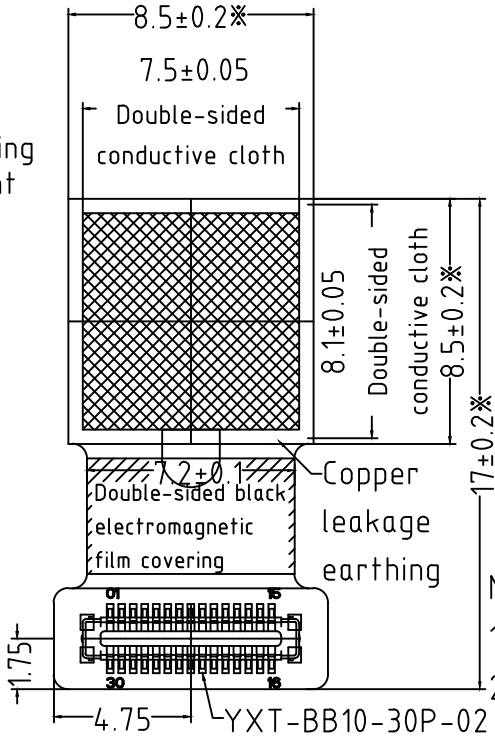
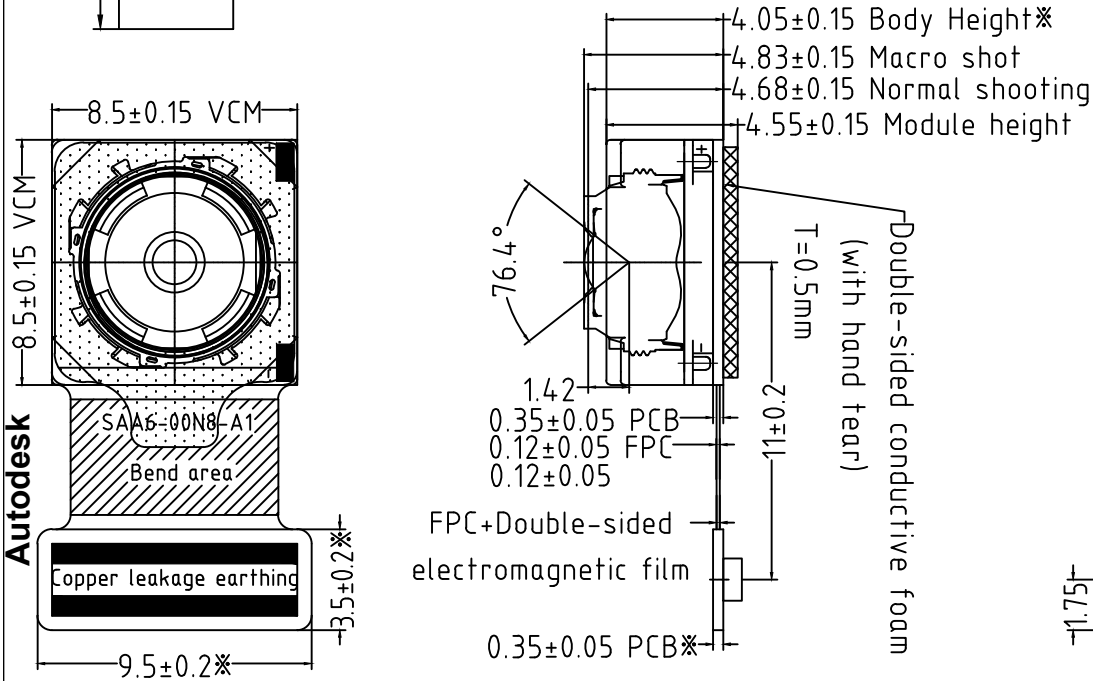


HSF

REV.	ECN. NO./ Description	Date	APPD.
A0	First Released	2019.07.30	Mr.Yu
A1	Change the motor	2019.11.27	Mr.Zu

NO	PIN NAME	NO	PIN NAME
1	DGND	16	DGND
2	MCP	17	ID (DOVDD)
3	MCN	18	DGND
4	DGND	19	PWDN (NC)
5	MDP2	20	RESET
6	MDN2	21	SDA
7	DGND	22	SCL
8	MDP0	23	DVDD 1.05V
9	MDN0	24	DGND
10	DGND	25	MCLK
11	MDP3	26	DGND
12	MDN3	27	DOVDD 1.8V
13	DGND	28	AGND
14	MDP1	29	AVDD 2.8V
15	MDN1	30	AF-VDD 2.8V



Note:
1, marked with * for key size;
2, module do PDAF and OTP Burn, mid = 0x23, Burn AWB, LSC;
3, Sensor IC address: 0x20;
4, EEPROM IIC address: 0XA0(W)0XB0(R) .

Main parameter	Lens name	3923C	Relative Illumination	>37.0%(Y=2.897)	Chip Type	S5K3P9SX04	INTENDED USE: SAA6-00N8-A1 TITLE: SPEC			
	Lens Size	1/3.1 5P	Focusing Range	10cm ~ ∞	Array Size	4640×3488				
	View Angle	76.4°±3°	Focussing Distance	5m	VCM name	OL-8537M65P25AT	CHD: DWG NO: SAA600N8A101			
	EFL	3.519	IR Filter	0.21 Blue	VCM current	100MA(MAX)				
	F.NO	2.0±5%	FPC Material	FPC uses non-adhesive calendered copper	VCM resistance	24 Ω±10%	DR: SCALE: 1:1 PAGE: 1/1 UNIT: mm REV: A0			
	TV Distortion	<1.5%	MIPI Impedance control	100 Ω±10% Ω	Driver IC	DW9763				
	Max Image Circle	Φ6.1	Base	NC	IC Address	0X1C				