





FRONT

SIDE

BACK


BACK

ReV.	Revision content description	Date
A	FIRST	2018.5.29

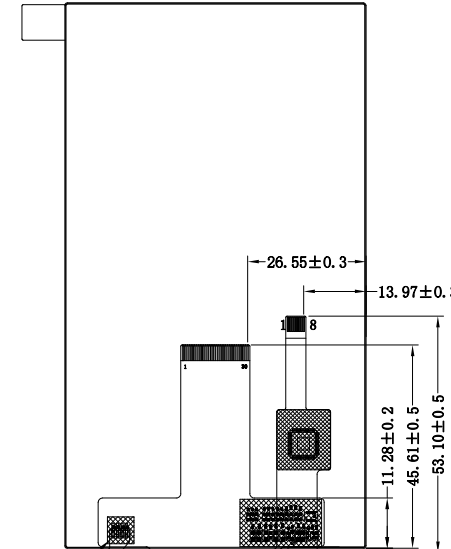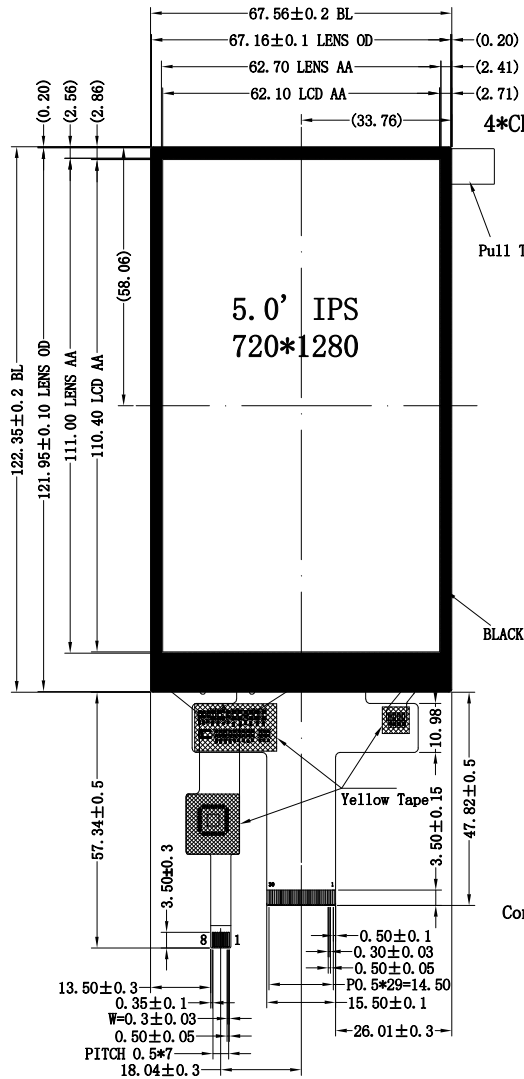

NOTES:

1. DISPLAY TYPE: 5.0", TFT-LCD, 65K/262K/16.7M COLORS
2. DISPLAY MODE: IPS NORMALLY BACK
3. VIEWING DIRECTION: ALL
4. DRIVER IC: ILI9881C (COG), CTP DRIVER IC: GT911
5. VCI/VDD: 3.3V, IOVCC: 1.65-3.3V
6. OPERATING TEMP: -20° C TO 70° C
STORAGE TEMP: -30° C TO 80° C
7. BACK LIGHT: LED WHITE, 12 LED, 40mA, 19.2±0.2V
8. RoHS COMPLIANT.

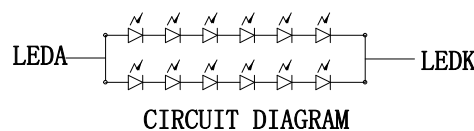

FPC Logic

PIN	Logic
1	GND
2	VDDIO (NC)
3	VDD
4	SCL
5	SDA
6	INT
7	RST
8	GND

NO.	Pin Name
1	NC
2	LEDK
3	NC
4	LEDA
5	NC
6	GND
7	MIPI_D0N
8	MIPI_D0P
9	GND
10	MIPI_D1N
11	MIPI_D1P
12	GND
13	MIPI_CLN
14	MIPI_CLP
15	GND
16	MIPI_D2N
17	MIPI_D2P
18	GND
19	MIPI_D3N
20	MIPI_D3P
21	GND
22	GND
23	NC
24	GND
25	TE
26	RESET
27	IOVCC
28	VCI
29	GND
30	GND

TOLERANCE (公差)		DRAWING NAME		
		PARTS NO.		
TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X±0.3	Drawn		Unit
	X.XX±0.2	Checked		mm
Scale 1:1		Approve		Page 1/1