


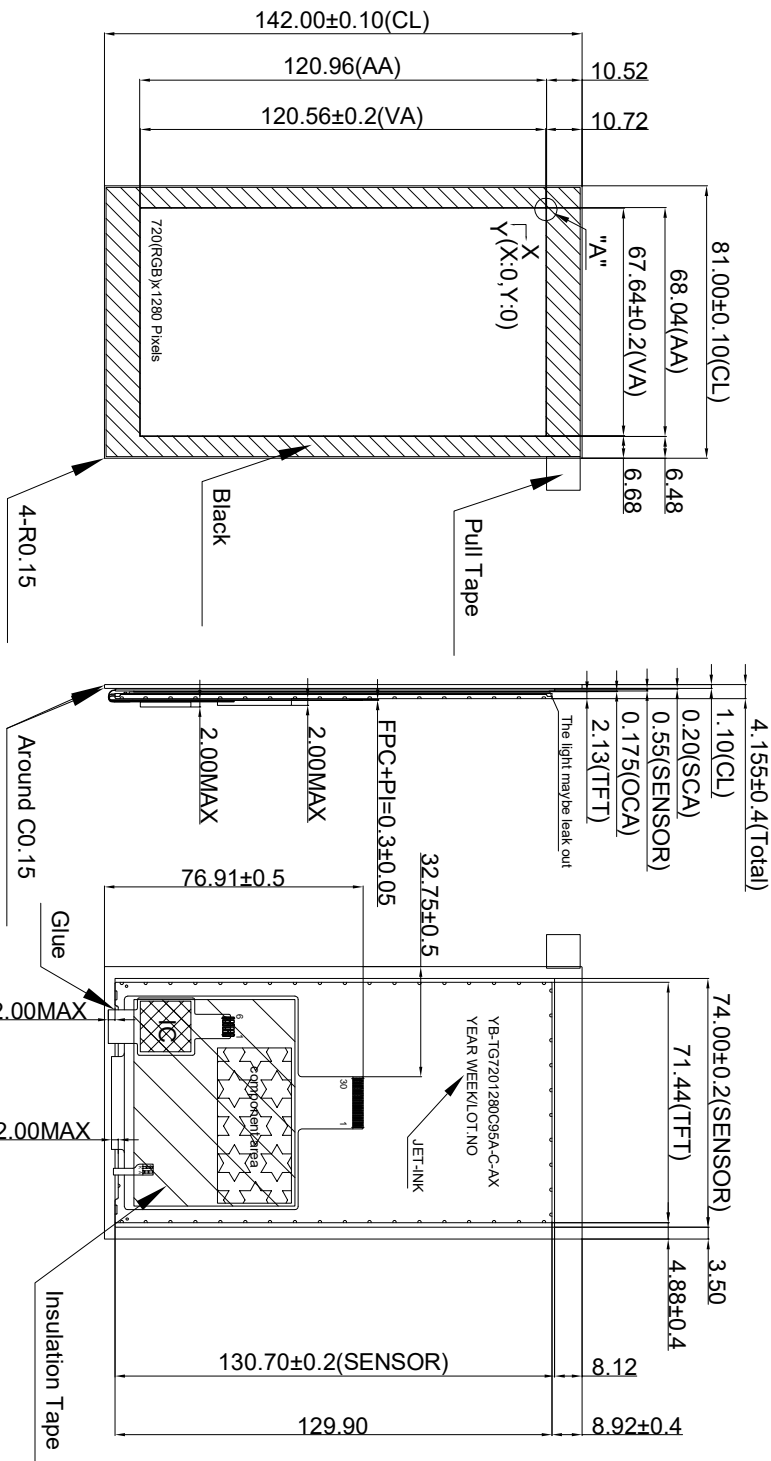

Specification:

1. Display mode: 5.7" TFT / Normally Black / Transmissive
2. Display Color: 16.7M
3. Viewing Direction: Free
4. CTP Driver IC: CF1133
5. Driver IC: IL1986IC
6. Glass Type: G+G+TFT
7. Surface Hardness: 6H min
8. Transparency: 80% min
9. Operating temperature: -20°C to +70°C
10. Storage temperature: -30°C to +80°C
11. Backlight: 12 chips White LED
12. Luminous Intensity: 195cd/m² (typ)
13. ROHS and REACH compliant
14. VA chocking base on AA 0.2mm, there is a risk of occluded pixels.

CIRCUIT DIAGRAM

B/L Electrical Circuit
(V=15.8-17.2V, If=34mA)



TOUCH PANEL		PIN ASSIGNMENT	
No.	Symbol	No.	Symbol
1	GND	28	SCL
2	VDD	29	INT
3	SDA	30	RSTN
4	SCL	Customer Approval	
5	INT		
6	RSTN		



YEEBO		MOD.	YB-TG7201280C95A-C-A		Sheet	1
		Name			Of	1
		DESIGNED	CHECKED	VERIFIED	FILE NAME	
		梁俊铭			Count Dwg.	
		2025/04/23		2025/4/23		
		UNIT	SIZE	SCALE		
		mm	A4	N.T.S		