

Model: Power-Xtra PX105080 - 3.7V 5000 mAh Li-Polymer Battery -with BMS-3.0A

Stock Code: 900.869.503.325

TECHNICAL INFORMATION

Item	Specifications	Conditions
Nominal Voltage	3.7±0.05V	0.2C Discharge
Charging	Method	CC-CV
	Voltage	4.20±0.05V
Typ. Capacity	5.000 mAh	0.2C discharge
Standard Charging Current	1.000 mA (0.2C)	Constant current 0.2C end voltage 2.75V
Standard Discharging Current	1.000 mA (0.2C)	Constant current 0.2C end voltage 4.2V
Max. Continuous Charge Current	2.500 mA (0.5C)	
Max. Continuous Discharge Current	2.500 mA (0.5C)	
Temperature	Charge	0 to +45°C
	Discharge	-20 to +60°C
	Storage	Less than 1 year: -20~25°C less than 3 months: -20~40°C
Weight	80 gr	approximately
Cycles Test	Higher than 80% of the Initial Capacities of the Cells Carry out 500cycle Charging/Discharging in the below condition. ♦Charge: Standard Charge ♦Discharge:0.5C to 2.75 V ♦Rest Time between charge /discharge:30min. ♦Temperature:20±5°C	

PCM PARAMETER PER BATTERY PACK

Item	Content	Criterion
Current	Maximum Charge / Discharge	3.0A
Over charge Protection	Overcharge Det. Voltage	4.28±0.05V
	Overcharge Rel. Voltage	4.10±0.05V
Over charge Protection	Overdischarge Det. Voltage	2.80±0.10V
	Overdischarge Rel. Voltage	3.00±0.1V
Over current protection	Over current detection current	4-8A


Model: Power-Xtra PX105080 - 3.7V 5000 mAh Li-Polymer Battery -with BMS-3.0A

Stock Code: 900.869.503.325

Dimension Details

Item	Description	Dimension
T	Cell Tab Thickness	10.2± 0.5 mm
W	Cell Tab Width	50± 1 mm
L	Cell Tab Length	82± 1 mm
CL	Cable Length	100± 0.3 mm / 24AWG
P	Connector Model	-

Technical Drawing

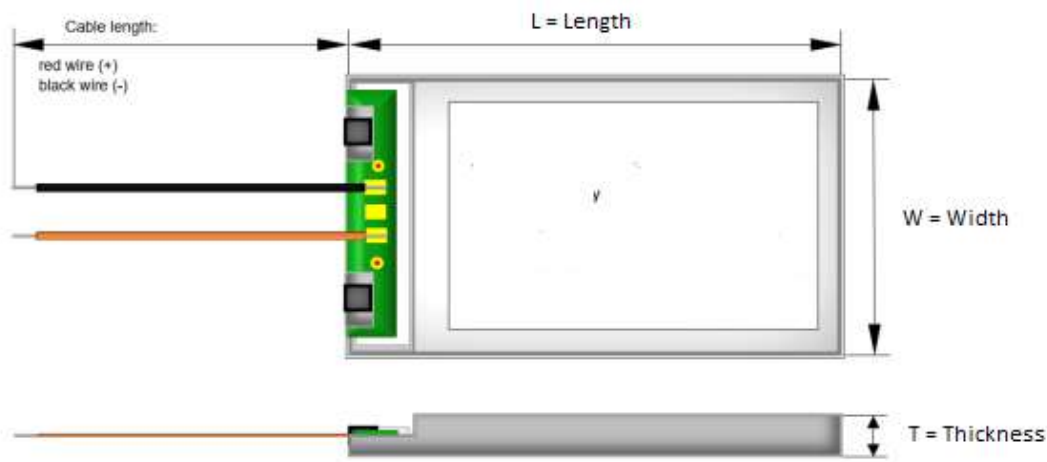

Image

