Build guide: fixed 102-bolt frame

The owner is proceeding with the retained `v11-six-bolt-cleat-v1` design as-is. This guide organizes its existing construction information; it does not change the design or assert structural acceptance. The evaluation record retains the numerical exceedance, material and installation assumptions, unverified no-slip floor condition and other limits.

Use the printable build packet and 30 dimensioned part-reference sheets alongside this guide. The current 102-axis hardware crosswalk, 136 receiver records and hole mask govern the bolt layout. Older 112-bolt/A574/spacer shopping lists do not govern this frame.

Materials and cut-piece inventory

Use dry DF-L No. 2 timber on the recorded basis. Nominal 2×6 means 38.1 × 139.7 mm; nominal 4×6 means 88.9 × 139.7 mm. The existing 13-board assignment includes 25.4 mm per-end trim and 3.175 mm per-member kerf planning allowances; its finished envelopes are not square-blank saw settings.

Stock	Boards	Assigned pieces
2×6 × 8 ft	5	Two floor runners and two center front posts; left/right bottom, lower-service and upper-service rails
2×6 × 10 ft	3	Header and two center principal supports
4×6 × 8 ft	3	Two rear legs, two outer front posts and top rail
4×6 × 10 ft	2	Left and right side rims

This yields **20 sawn pieces**. Keep each source ID on its piece: `base_floor_left/right`, `base_header`, `base_post_center_left/right`, `base_post_outer_left/right`, `base_principal_center_left/right`, `base_rail_bottom_left/right`, `base_rail_service_lower_left/right`, `base_rail_service_upper_left/right`, `base_rail_top`, `base_side_left/right` and `lumber_leg_left/right`.

Sheet cut pieces	Quantity	Material and IDs
Main climbing panels	4	Recorded Roseburg AC fir 23/32 CAT face-panel basis: `main_lower_left/right`, `main_upper_left/right`
Whole kickers	2	Same face-panel basis: `kicker_left/right`; retain their complete outlines
Cleat leaves	4	Nominal ¾-inch generic birch: `eoere_cleat_left`, `eoere_cleat_left_outer`, `eoere_cleat_right`, `eoere_cleat_right_outer`

The four leaves make two glued cleats, each with two nominal 19.05 mm leaves. These are **cut-piece counts**, not a new plywood-sheet purchasing layout. Finished piece envelopes are **1217.6125 × 1219.2 mm** for each main panel, **1217.6125 × 277 mm** for each kicker and **361.186083 × 139.7 × 19.05 mm** for each trapezoidal cleat leaf. Use the current outlines and the existing member/cut records. Retain the recorded face-panel selection; the birch purchase applies to the cleats.

Hardware shopping and sorting

The grouped schedule requires **102 bolts, 102 nuts, 204 washers, 24 angles and 66 panel/kicker screws; no spacers or packers**. Quantities below are individual pieces. Existing product links are references, not a current price, stock or delivered-inventory check.

Quantity	Bolt, all Grade 5 hex head and retained partial-thread profile	Recorded SKU/type
48	3/8–16 × 2½ in	Bolt Depot 363
8	3/8–16 × 3 in	Bolt Depot 365
2	3/8–16 × 4½ in	Bolt Depot 368
24	3/8–16 × 4¾ in	Zoro G0341148
12	3/8–16 × 6½ in	Conditional Style 1 HCS type; supplier SKU unselected
4	3/8–16 × 6 in	Conditional Style 1 HCS type; supplier SKU unselected
4	1/2–13 × 8½ in	Zoro G0340956

Quantity	Remaining hardware
82	3/8–16 SAE J995 Grade 5 nuts, Bolt Depot 2571
16	3/8–16 SAE J995 Grade 8 nuts, 2584, for the sixteen conditional long bolts
4	1/2–13 SAE J995 Grade 5 nuts, 2573
196	3/8-inch USS washers, 15023 dimensional family; sort into the thickness groups below
8	1/2-inch USS washers, 15025 dimensional family
24	Retained Eoere ZX128-B-T4 factory angles; owner reports owning this bracket model

Quantity	Remaining hardware
66	Purchased Hillman 42605, #10 × 2½ in, #2 Phillips: 48 main-panel screws and nine per kicker

Put one specified washer under every bolt head and one under every nut. All washers require the existing **minimum Fy of 200 MPa**, retained ID/OD and bearing-face geometry. The nominal SKU or “Grade 5” wording alone does not establish that material requirement; the receiving specification identifies the existing documentation basis.

Washer group	Quantity	Retained delivered-thickness range
Ordinary 3/8-inch ends	184	2.35–2.6416 mm
Front/rear floor-joint 3/8-inch ends	12	1.6256–2.032 mm
All 1/2-inch ends	8	2.85–3.175 mm

The twelve thinner foot washers are both ends of `rail_front_bolt_left_1/2`, `rail_front_bolt_right_1/2`, `rail_rear_bolt_left_1` and `rail_rear_bolt_right_1`. Keep these separately labeled. The current minima are recorded in the evaluation’s working-assumption table; the earlier 2.30 mm addendum is historical.

Sixteen special long bolts

Use the current active-profile binding and its compact source profile intake. Both lengths specify ASME B18.2.1-2012 full-size-body, partially threaded hex cap screws with default Style 1 continuous-radius fillet and separately specified SAE J429 Grade 5 material. A generic length/grade listing, full-thread bolt or seven-inch substitute does not describe this contract.

Profile requirement	Twelve 6½-inch bolts	Four 6-inch front bolts
Underhead length	160.528–165.1 mm	149.86–152.4 mm
Minimum full-body length from underhead	125.476 mm	119.126 mm
Maximum grip-gaging input, LG	133.35 mm	127.0 mm
Minimum full-form thread length	31.75 mm	25.4 mm
Full-body diameter	9.3726–9.525 mm	9.3726–9.525 mm

Keep the contract’s conditional UNRC-2A/no-undercut core requirements and 7.31774 mm analysis root floor. LG is a gaging limit, not an observed thread start or proof that the nut seats freely. The twelve 6½-inch axes are the four `cleat_post_bolt_*` axes, `eoere_bolt_067/070/071/074` and four `v11_cleat_*_side_*` axes. The four six-inch axes are `rail_front_bolt_*`. Their recorded hex across flats is 9/16 inch.

Tools, datums and marking

Have the cutting tools needed for the drawn profiles, a drill and suitable guide, clamps, exit backers, awl/transfer marker, tape/rule, square and calipers. Have matching hex wrenches/sockets, a #2 Phillips driver, the selected Kobalt #10 pilot/countersink insert, sanding/dust-removal supplies, mixing containers and either volume measures or a suitable weighing scale for T-88. Printed jigs are marking aids.

All part-sheet dimensions are millimetres. Label each piece with its exact ID, left/right hand, reference face and local zero before cutting or marking. L follows the saved grain/reference axis; U and V follow that part’s shown basis. Header U/V and runner U/V are different: do not reorder dimensions by assuming U is always thickness. Preserve the actual bevels, continuous rear-leg recess and whole kicker profiles shown on the part sheets.

The assembly is not a simple mirror about world X = 0. Left/right rail lengths and the right-side kerf offset differ. Use each part’s own sheet and datum; do not flip a left template to make a right part. Receiver CSV endpoints mean increasing axis parameter, **not a selected drilling side**. Historical BRep face numbers and viewer image scale are not physical measuring datums.

The horizontal marking jig applies only to the twelve listed loose-rail FAR pairs, before adjacent timber blocks its end stop. The handed V3 rear-foot templates print in millimetres at 100%, flat skin down and ribs up; use their scale check. Their 2 mm apertures take an awl, not a drill. Neither template supplies post-flange height registration or every frame hole.

Cleat glue-up

Use the recorded **System Three T-88 structural-cleat process**; ordinary wood glue remains the general preference elsewhere. Match the two leaves for each hand and preserve the shown grain orientation. Prepare clean unfinished faces, remove sanding dust and avoid sanding through a thin face veneer. Apply adhesive across the mating faces, bring them into maintained contact and keep the pair registered without squeezing the adhesive out.

Mix **1:1 resin/hardener by volume OR 100:83 by weight**; do not interchange the ratios. The retained manufacturer process gives about **45 minutes working time, 6–8 hours hardening and 24 hours functional strength at 70°F**. Allow the temperature-dependent cure before subsequent machining/loading; colder conditions take longer. Follow the current product instructions for handling and cure. The effective 0.2 mm analysis zone is not a shop gap, shim, spread-thickness target or clamp-pressure instruction. Recorded structural-cleat basis and sources · Manufacturer product instructions

Coordinated assembly sequence

1. Sort stock and hardware into labeled piece/axis groups. Lay out the twenty timber profiles and ten sheet pieces from their own sheets. Preserve the finished datums while making the cuts; keep the leg recess and sloping foot surfaces together with their handed marks. Prepare and cure the paired cleat leaves, then finish their registered outlines and bores.
2. Support the incomplete frame while dry-fitting the two side/leg/runner assemblies, header, top, center supports and horizontal rails. Fit the factory angles and cleats in their recorded orientations. Keep **two bolts at each rail–leg joint, one at each leg–floor joint and six at each cleat**. Identify head and nut access before closing adjacent assemblies or fitting panels.
3. Mark and cut the 32 existing timber service bores on their eight named hosts using the separate passage marks on the part sheets. The printed coordinates already include the recorded F1–G1 40 mm routing shift; do not add it again. Do not copy the older ten T-nut recesses or add other timber wiring cutouts. These Ø38.1 mm openings are separate from frame-bolt holes. Mark only the active axes in the current crosswalk. Use actual bracket factory holes as transfer-marking references where applicable; do not populate every steel hole. The four `v11_cleat_left_post_1/2` and `v11_cleat_right_post_1/2` near-post positions are masked and receive **no wood mark or drill**. The outer-top connections retain their active FAR pairs only. Keep the current mask at the bench.
4. Label the matching faces, clamp the matching wood receivers in their dry-fit registration and temporarily disassemble as needed for drill-guide access. Transfer marks before removing a fitting, then remove marking templates and steel fittings from the wood-clearance-bit path. Keep the steel factory holes unchanged. Use a guide and exit backer, preserving the matched centerline through the wood receivers. Do not elongate a hole or use a driven bolt to pull misregistered parts together.
5. Use the existing finished **wood bolt-clearance** rule: nominal D + 1/32 to D + 1/16 inch. That is **10.31875–11.1125 mm for 3/8-inch bolts**, and **13.49375–14.2875 mm for 1/2-inch bolts**. Select a bit/process that produces the required finished opening and check the opening itself. The receiver's occupied CAD bore, a factory steel hole and a screw pilot are different things; the CSV does not itself select a bit, bushing, approach or drilling depth.
6. Reassemble complete bolt/washer/nut stacks in the current per-axis orientation, with the correct long-bolt profiles and washer groups. Maintain flat washer seats and the intended timber/angle backing contact. Fit all parts before final snug seating. The existing analysis credits **no tightening preload or interface friction and supplies no installation torque value**. Preserve tool access: the four short-post nut positions have recorded long-tool obstructions; the compact approach screened in the source is 25.4 mm diameter × 25.4 mm long, not a measured tool fit.
7. Fit the four main panels and two kickers, keeping the existing outlines, seams, backing and 66 current screw stations. Do not transpose an earlier candidate's screw heights. Preserve access to the bolt stacks before covering them.
8. For Hillman 42605, use the owner-selected **Kobalt #10 insert: 1/8-inch pilot and 3/8-inch face countersink**, then drive with #2 Phillips so the flat head is flush without breaking through the face veneer. Carry out the recorded same-plywood/scrap-DF-L offcut check before the production holes. Do not turn this lead hole into a plywood clearance hole. The old 50.8 mm screw length and 4.1402 mm occupied diameter in analysis CSVs are not the purchased 63.5 mm screw or its pilot. Purchase/tool record
9. Use the current 142 T-nut / 132 LED opening table for panel marks: view the climbing face, measure from its left edge and the stated TOP/DOWN or BOTTOM/UP datum. The table already includes the existing G2 LED +5 mm outward move; do not add it again. Right-hand offsets already include the present kerf placement. These openings are separate from the 66 attachment screws. Follow the existing hold/T-nut instructions and LED layout instructions for those separate panel openings. Reconcile the finished part and fastener counts, backing, complete stacks and accessible nuts against this packet. Record observations only when made; the floor condition remains the assumption stated in the evaluation record.

Printable completion record

Leave entries blank until observed. Keep this record with the printed sheets; do not pre-fill or rewrite the frozen CSV Actual/Disposition cells.

Check	Date / initials	Actual / notes
Thirteen stock boards identified; twenty timber IDs and handed datums marked		
Four main panels, two kickers and four cleat leaves identified		
T-88 mix basis, glue-up temperature and cure interval recorded		
102 bolt types/lengths, 102 nuts and sixteen long-bolt profiles matched		
184 ordinary, twelve foot and eight larger washers sorted to current requirements		
Dry-fit and tool access checked before transfer marking		
Current active axes marked; four masked near-post positions left unused		
Matching wood holes aligned; finished openings and washer seats checked		
32 source-listed timber service bores and existing routing shift checked		
102 complete two-washer stacks fitted; zero spacers/packers		
Hillman offcut pilot/countersink/flush-head result recorded		
48 main-panel and eighteen kicker screws installed at their recorded stations		
142 T-nut and 132 LED openings matched; existing G2 shift retained		
Final part/count/backing/access observations recorded		

Board allocation

Twenty timber pieces on thirteen boards. Allowances retain 25.4 mm trim at each end and 3.175 mm kerf per member. Listed finished grain envelopes are layout references, not automatic square-blank lengths or a saw-cut order.

Board	Stock / feet	Assigned members	Finished grain envelopes (mm)	Remaining nominal stock (mm)
S01	2x6 / 8	base_floor_left, base_post_center_left	[1815.64648304169,238.9]	326.7
S02	2x6 / 8	base_floor_right, base_post_center_right	[1815.64648304169,238.9]	326.7
S03	2x6 / 8	base_rail_bottom_left, base_rail_bottom_right	[1041.25,1077.275]	262.7
S04	2x6 / 8	base_rail_service_lower_left, base_rail_service_lower_right	[1041.25,1077.275]	262.7
S05	2x6 / 8	base_rail_service_upper_left, base_rail_service_upper_right	[1041.25,1077.275]	262.7
S06	2x6 / 10	base_header	[2435.2250000000004]	558.8
S07	2x6 / 10	base_principal_center_left	[2455.3671193494456]	538.7
S08	2x6 / 10	base_principal_center_right	[2455.3671193494456]	538.7
S09	4x6 / 8	lumber_leg_left, base_post_outer_left	[1989.0260846901758,238.9]	153.3
S10	4x6 / 8	lumber_leg_right, base_post_outer_right	[1989.0260846901758,238.9]	153.3
S11	4x6 / 8	base_rail_top	[2257.425]	127.0
S12	4x6 / 10	base_side_left	[2539.7676060801155]	454.3
S13	4x6 / 10	base_side_right	[2539.7676060801155]	454.3

Bolt installation schedule

One bolt, one matching nut and two specified washers per axis; zero spacers. All bolts retain the Grade 5 partial-thread basis. Special 6/6½-inch rows require the profile check in the guide. Foot and ordinary washer families have different thickness windows.

Axis	Thread × nominal length (in)	Bolt SKU / type	Nut SKU	Both washers (mm thickness)	Head / nut faces
cleat_post_bolt_left_1	3/8-16 × 6.50	Special partial-thread HCS	2584	15023:2.35–2.6416	exterior / interior
cleat_post_bolt_left_2	3/8-16 × 6.50	Special partial-thread HCS	2584	15023:2.35–2.6416	exterior / interior
cleat_post_bolt_right_1	3/8-16 × 6.50	Special partial-thread HCS	2584	15023:2.35–2.6416	exterior / interior
cleat_post_bolt_right_2	3/8-16 × 6.50	Special partial-thread HCS	2584	15023:2.35–2.6416	exterior / interior
eoere_bolt_001	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_002	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_003	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_004	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_005	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_006	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_007	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_008	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_009	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_010	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_011	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_012	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_013	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_014	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_015	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_016	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_017	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_018	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_019	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_020	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_021	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_022	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_023	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_024	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_025	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_026	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_027	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_028	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_029	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_030	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_031	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/

Axis	Thread × nominal length (in)	Bolt SKU / type	Nut SKU	Both washers (mm thickness)	Head / nut faces
eoere_bolt_032	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_033	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_034	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_035	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_036	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_037	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_038	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_039	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_040	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_041	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_042	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_043	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_044	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_045	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_046	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_047	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_048	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_049	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_050	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_051	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_052	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_053	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_054	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_055	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_056	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_057	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_058	3/8-16 × 4.75	G0341148	2571	15023:2.35–2.6416	exterior / interior
eoere_bolt_059	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_060	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_061	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_062	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_063	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_064	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_065	3/8-16 × 3.00	365	2571	15023:2.35–2.6416	/
eoere_bolt_066	3/8-16 × 3.00	365	2571	15023:2.35–2.6416	/
eoere_bolt_067	3/8-16 × 6.50	Special partial-thread HCS	2584	15023:2.35–2.6416	exterior / interior
eoere_bolt_068	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_069	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_070	3/8-16 × 6.50	Special partial-thread HCS	2584	15023:2.35–2.6416	exterior / interior
eoere_bolt_071	3/8-16 × 6.50	Special partial-thread HCS	2584	15023:2.35–2.6416	exterior / interior
eoere_bolt_072	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/

Axis	Thread × nominal length (in)	Bolt SKU / type	Nut SKU	Both washers (mm thickness)	Head / nut faces
eoere_bolt_073	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_074	3/8-16 × 6.50	Special partial-thread HCS	2584	15023:2.35–2.6416	exterior / interior
eoere_bolt_075	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_076	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_077	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_078	3/8-16 × 2.50	363	2571	15023:2.35–2.6416	/
eoere_bolt_079	3/8-16 × 3.00	365	2571	15023:2.35–2.6416	/
eoere_bolt_080	3/8-16 × 3.00	365	2571	15023:2.35–2.6416	/
eoere_bolt_081	3/8-16 × 3.00	365	2571	15023:2.35–2.6416	/
eoere_bolt_082	3/8-16 × 3.00	365	2571	15023:2.35–2.6416	/
eoere_bolt_083	3/8-16 × 3.00	365	2571	15023:2.35–2.6416	/
eoere_bolt_084	3/8-16 × 3.00	365	2571	15023:2.35–2.6416	/
lumber_leg_bolt_left_1	1/2-13 × 8.50	G0340956	2573	15025:2.85–3.175	exterior / interior
lumber_leg_bolt_right_1	1/2-13 × 8.50	G0340956	2573	15025:2.85–3.175	exterior / interior
proposal_upper_rear_left_added_half_in	1/2-13 × 8.50	G0340956	2573	15025:2.85–3.175	exterior / interior
proposal_upper_rear_right_added_half_in	1/2-13 × 8.50	G0340956	2573	15025:2.85–3.175	exterior / interior
rail_front_bolt_left_1	3/8-16 × 6.00	Special partial-thread HCS	2584	15023:1.6256–2.032	exterior / interior
rail_front_bolt_left_2	3/8-16 × 6.00	Special partial-thread HCS	2584	15023:1.6256–2.032	exterior / interior
rail_front_bolt_right_1	3/8-16 × 6.00	Special partial-thread HCS	2584	15023:1.6256–2.032	exterior / interior
rail_front_bolt_right_2	3/8-16 × 6.00	Special partial-thread HCS	2584	15023:1.6256–2.032	exterior / interior
rail_rear_bolt_left_1	3/8-16 × 4.50	368	2571	15023:1.6256–2.032	exterior / interior
rail_rear_bolt_right_1	3/8-16 × 4.50	368	2571	15023:1.6256–2.032	exterior / interior
v11_cleat_left_side_1	3/8-16 × 6.50	Special partial-thread HCS	2584	15023:2.35–2.6416	exterior / interior
v11_cleat_left_side_2	3/8-16 × 6.50	Special partial-thread HCS	2584	15023:2.35–2.6416	exterior / interior
v11_cleat_right_side_1	3/8-16 × 6.50	Special partial-thread HCS	2584	15023:2.35–2.6416	exterior / interior
v11_cleat_right_side_2	3/8-16 × 6.50	Special partial-thread HCS	2584	15023:2.35–2.6416	exterior / interior

Dimensioned part references

Fixed 102-bolt design: part reference sheets

30 parts; 102 bolts; 136 receiver references; 66 existing panel/kicker screw axes; 32 retained Ø38.1 mm service passages in eight timbers. These sheets present the retained geometry and do not resolve recorded exceedances or physical fit. Current build guide governs scope; four omitted near-post axes are never marked.

All dimensions mm. Diagram proportions are adjusted for readability: not 1:1 templates or automatic saw settings. Displayed coordinates round the source to three decimals, not a machining tolerance. L/U/V values retain saved signs; A/B offsets start at the finished bounding reference. L arrows follow grain/reference; L is world X for the existing face-panel frame, and world Z for cleat face-grain orientation.


Panel marks show climbing/head-face Vmin; Vmax is the backing reference. Use current 102-axis hardware/receiver tables and omission mask; no old SPAX instructions, spacers, or occupied-CAD bit selection transfers. Hold/LED templates are supplied separately.

base_floor_left

solid timber; quantity 1; stock 2x6; board S01. Finished L/U/V spans: (1815.646, 38.100, 139.700) mm.

Saved datum XYZ (-1257.300, -175.700, 139.700). Positive L/U/V vectors: (0.000, 1.000, 0.000); (1.000, 0.000, 0.000); (0.000, 0.000, -1.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

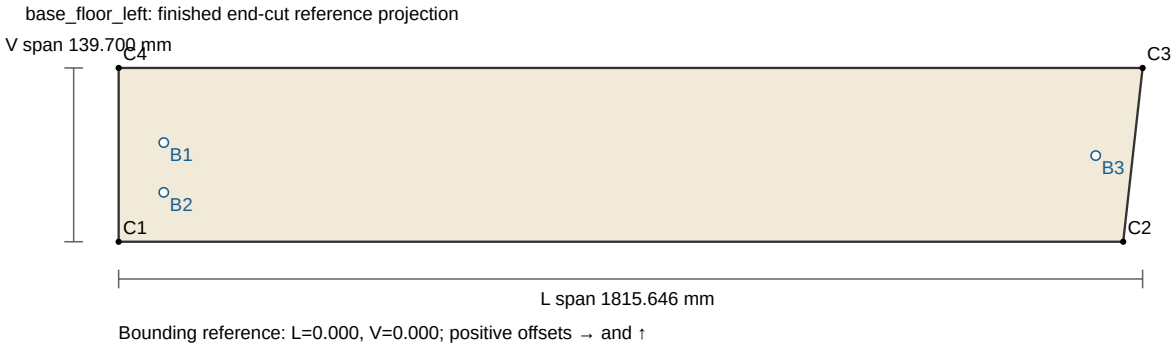

Corner stations C1 (0.000, 0.000); C2 (1781.239, 0.000); C3 (1815.646, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	rail_front_bolt_left_1	(80.000, 0.000, 79.700)	(80.000, 38.100, 79.700)	(80.000, 79.700)
2	rail_front_bolt_left_2	(80.000, 0.000, 39.700)	(80.000, 38.100, 39.700)	(80.000, 39.700)
3	rail_rear_bolt_left_1	(1732.526, 0.000, 69.265)	(1732.526, 38.100, 69.265)	(1732.526, 69.265)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 0.000); (0.000, 38.100, 0.000); (0.000, 0.000, 139.700); (0.000, 38.100, 139.700)
2 (historical source only)	(0.971, 0.000, -0.239)	1729.551	(1815.646, 0.000, 139.700); (1815.646, 38.100, 139.700); (1781.239, 0.000, 0.000); (1781.239, 38.100, 0.000)


Source member 0; finished-BRep SHA256 8c1322eea375de5a0f15564a2826a6194ef385424ad1309d129f82a5816cc30a. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_floor_right

solid timber; quantity 1; stock 2x6; board S02. Finished L/U/V spans: (1815.646, 38.100, 139.700) mm.

Saved datum XYZ (1216.025, -175.700, 139.700). Positive L/U/V vectors: (0.000, 1.000, 0.000); (1.000, 0.000, 0.000); (0.000, 0.000, -1.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

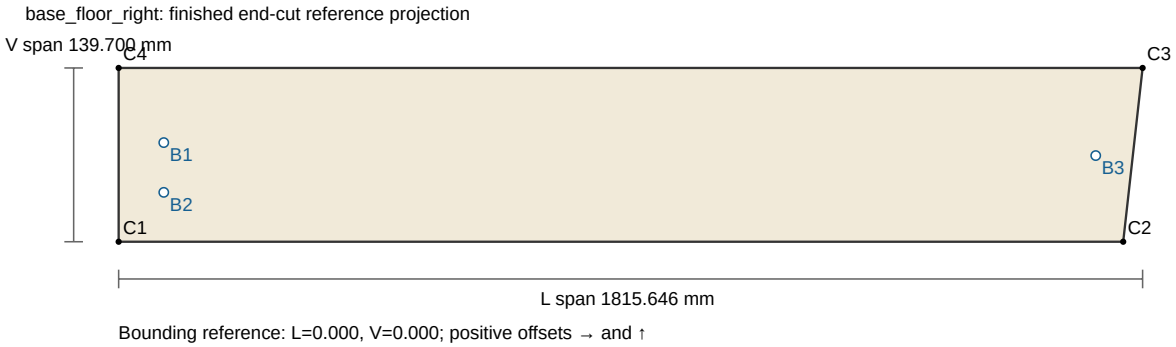

Corner stations C1 (0.000, 0.000); C2 (1781.239, 0.000); C3 (1815.646, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	rail_front_bolt_right_1	(80.000, 38.100, 79.700)	(80.000, 0.000, 79.700)	(80.000, 79.700)
2	rail_front_bolt_right_2	(80.000, 38.100, 39.700)	(80.000, 0.000, 39.700)	(80.000, 39.700)
3	rail_rear_bolt_right_1	(1732.526, 38.100, 69.265)	(1732.526, 0.000, 69.265)	(1732.526, 69.265)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 0.000); (0.000, 38.100, 0.000); (0.000, 0.000, 139.700); (0.000, 38.100, 139.700)
2 (historical source only)	(0.971, 0.000, -0.239)	1729.551	(1815.646, 0.000, 139.700); (1815.646, 38.100, 139.700); (1781.239, 0.000, 0.000); (1781.239, 38.100, 0.000)


Source member 1; finished-BRep SHA256 698e9b8cbc50242d0b0380770025abf6b4ba33ca155c643c5fbe90d460dc3a7d. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_header

solid timber; quantity 1; stock 2x6; board S06. Finished L/U/V spans: (2435.225, 139.700, 38.100) mm.

Saved datum XYZ (-1219.200, -175.700, 238.900). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 1.000, 0.000); (0.000, 0.000, 1.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

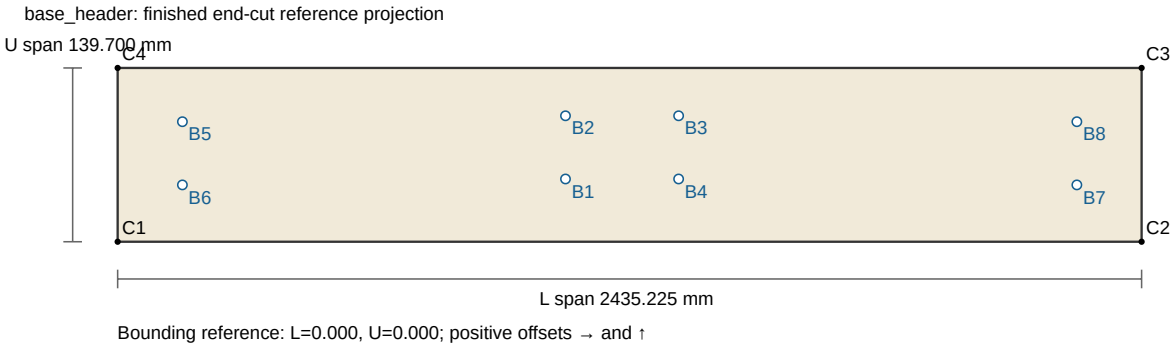

Corner stations C1 (0.000, 0.000); C2 (2435.225, 0.000); C3 (2435.225, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_065	(1065.062, 50.450, 38.100)	(1065.062, 50.450, 0.000)	(1065.062, 50.450)
2	eoere_bolt_066	(1065.062, 101.250, 38.100)	(1065.062, 101.250, 0.000)	(1065.062, 101.250)
3	eoere_bolt_079	(1334.138, 101.250, 38.100)	(1334.138, 101.250, 0.000)	(1334.138, 101.250)
4	eoere_bolt_080	(1334.138, 50.450, 38.100)	(1334.138, 50.450, 0.000)	(1334.138, 50.450)
5	eoere_bolt_081	(153.987, 96.487, 38.100)	(153.987, 96.487, 0.000)	(153.987, 96.487)
6	eoere_bolt_082	(153.987, 45.688, 38.100)	(153.987, 45.688, 0.000)	(153.987, 45.688)
7	eoere_bolt_083	(2281.238, 45.688, 38.100)	(2281.238, 45.688, 0.000)	(2281.238, 45.688)
8	eoere_bolt_084	(2281.238, 96.487, 38.100)	(2281.238, 96.487, 0.000)	(2281.238, 96.487)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
0 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 38.100); (0.000, 0.000, 0.000); (0.000, 139.700, 38.100); (0.000, 139.700, 0.000)
5 (historical source only)	(1.000, 0.000, 0.000)	2435.225	(2435.225, 0.000, 38.100); (2435.225, 139.700, 38.100); (2435.225, 139.700, 0.000); (2435.225, 0.000, 0.000)


Source member 2; finished-BRep SHA256 fb66386e8d48548dfd9102b7f0f9b389ae64d6ba56d1c67e49c263bdd98b2eb8. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_post_center_left

solid timber; quantity 1; stock 2x6; board S01. Finished L/U/V spans: (238.900, 38.100, 139.700) mm.

Saved datum XYZ (-89.050, -175.700, 0.000). Positive L/U/V vectors: (0.000, 0.000, 1.000); (1.000, 0.000, 0.000); (0.000, 1.000, 0.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

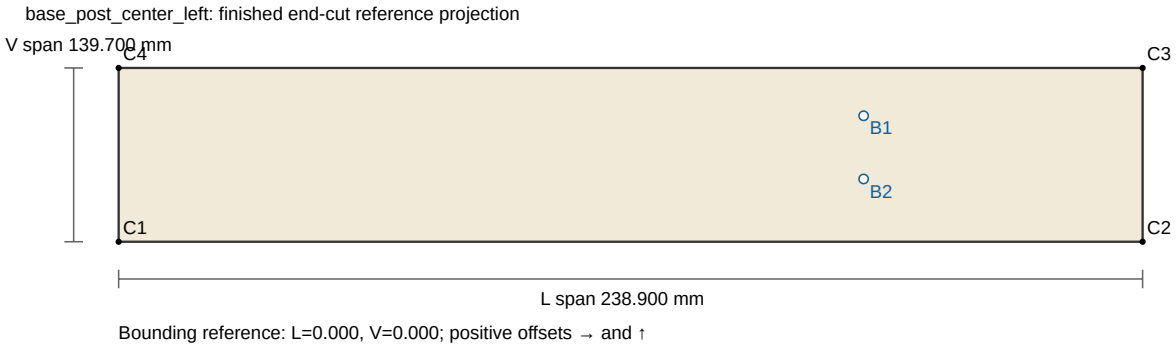

Corner stations C1 (0.000, 0.000); C2 (238.900, 0.000); C3 (238.900, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_075	(173.812, 0.000, 101.250)	(173.812, 38.100, 101.250)	(173.812, 101.250)
2	eoere_bolt_077	(173.812, 0.000, 50.450)	(173.812, 38.100, 50.450)	(173.812, 50.450)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
2 (historical source only)	(1.000, 0.000, 0.000)	238.900	(238.900, 0.000, 139.700); (238.900, 0.000, 0.000); (238.900, 38.100, 139.700); (238.900, 38.100, 0.000)
3 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 139.700); (0.000, 0.000, 0.000); (0.000, 38.100, 139.700); (0.000, 38.100, 0.000)


Source member 3; finished-BRep SHA256 88872d62daa332accd29cba79795e2547264301b32d94be00150ee7c02b01f23. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_post_center_right

solid timber; quantity 1; stock 2x6; board S02. Finished L/U/V spans: (238.900, 38.100, 139.700) mm.

Saved datum XYZ (11.750, -175.700, 0.000). Positive L/U/V vectors: (0.000, 0.000, 1.000); (1.000, 0.000, 0.000); (0.000, 1.000, 0.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

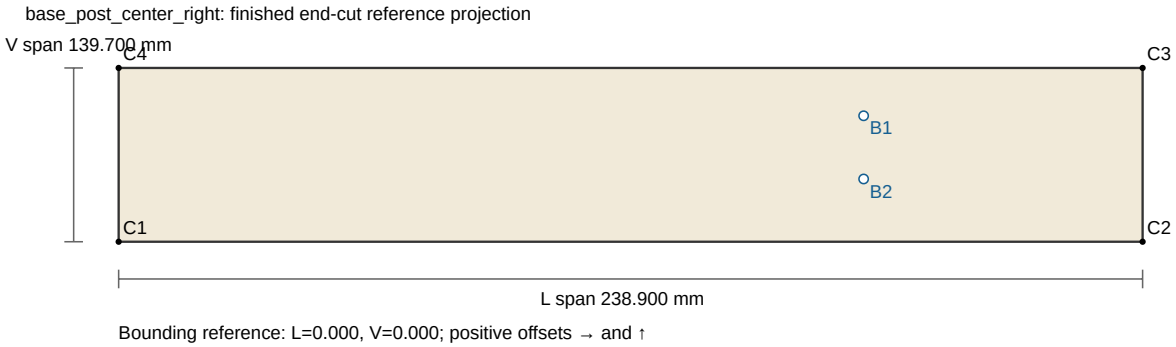

Corner stations C1 (0.000, 0.000); C2 (238.900, 0.000); C3 (238.900, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_076	(173.812, 38.100, 101.250)	(173.812, 0.000, 101.250)	(173.812, 101.250)
2	eoere_bolt_078	(173.812, 38.100, 50.450)	(173.812, 0.000, 50.450)	(173.812, 50.450)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
2 (historical source only)	(1.000, 0.000, 0.000)	238.900	(238.900, 0.000, 139.700); (238.900, 0.000, 0.000); (238.900, 38.100, 139.700); (238.900, 38.100, 0.000)
3 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 139.700); (0.000, 0.000, 0.000); (0.000, 38.100, 139.700); (0.000, 38.100, 0.000)


Source member 4; finished-BRep SHA256 6eb232b82e74ebf3989aa00af0a22bdfce6facacdad483797957784b414a5542. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_post_outer_left


solid timber; quantity 1; stock 4x6; board S09. Finished L/U/V spans: (238.900, 88.900, 139.700) mm.

Saved datum XYZ (-1219.200, -175.700, 0.000). Positive L/U/V vectors: (0.000, 0.000, 1.000); (1.000, 0.000, 0.000); (0.000, 1.000, 0.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

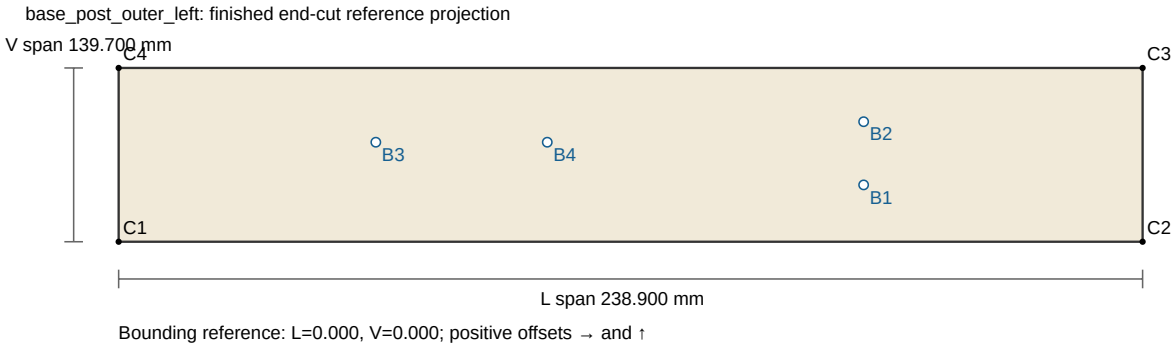

Corner stations C1 (0.000, 0.000); C2 (238.900, 0.000); C3 (238.900, 139.700); C4 (0.000, 139.700)

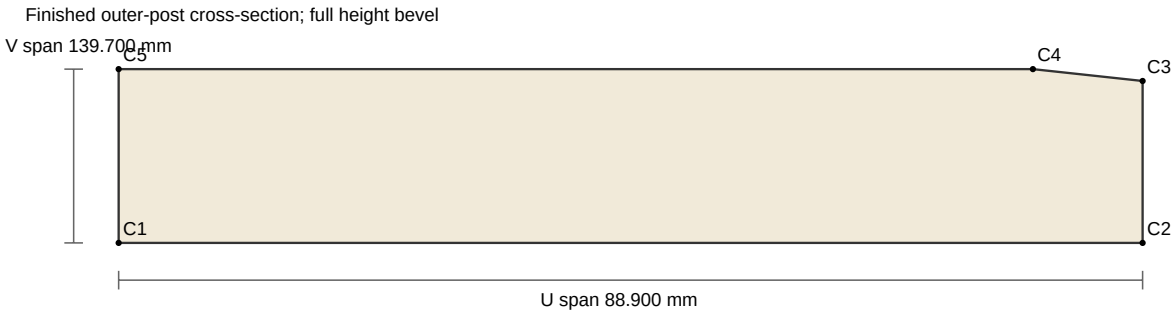

Corner stations C1 (0.000, 0.000); C2 (88.900, 0.000); C3 (88.900, 130.175); C4 (79.375, 139.700); C5 (0.000, 139.700)

9.525×9.525 mm, 45° longitudinal corner bevel for full L 0–238.9 mm. Left: U 88.9/V 139.7 corner; right: U 0/V 139.7 corner. This feature is absent from raw box vertices.

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	cleat_post_bolt_left_1	(173.812, 0.000, 45.688)	(173.812, 88.900, 45.688)	(173.812, 45.688)
2	cleat_post_bolt_left_2	(173.812, 0.000, 96.487)	(173.812, 88.900, 96.487)	(173.812, 96.487)
3	rail_front_bolt_left_1	(60.000, 0.000, 80.000)	(60.000, 88.900, 80.000)	(60.000, 80.000)
4	rail_front_bolt_left_2	(100.000, 0.000, 80.000)	(100.000, 88.900, 80.000)	(100.000, 80.000)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
2 (historical source only)	(1.000, 0.000, 0.000)	238.900	(238.900, 79.375, 139.700); (238.900, 0.000, 139.700); (238.900, 88.900, 130.175); (238.900, 88.900, 0.000); (238.900, 0.000, 0.000)
3 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 139.700); (0.000, 79.375, 139.700); (0.000, 88.900, 130.175); (0.000, 88.900, 0.000); (0.000, 0.000, 0.000)


Source member 5; finished-BRep SHA256 65f99b1fa8b3b79a4cef5f8b63986fed29de58845eba2a8b3189200ec830f706. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_post_outer_right


solid timber; quantity 1; stock 4x6; board S10. Finished L/U/V spans: (238.900, 88.900, 139.700) mm.

Saved datum XYZ (1127.125, -175.700, 0.000). Positive L/U/V vectors: (0.000, 0.000, 1.000); (1.000, 0.000, 0.000); (0.000, 1.000, 0.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

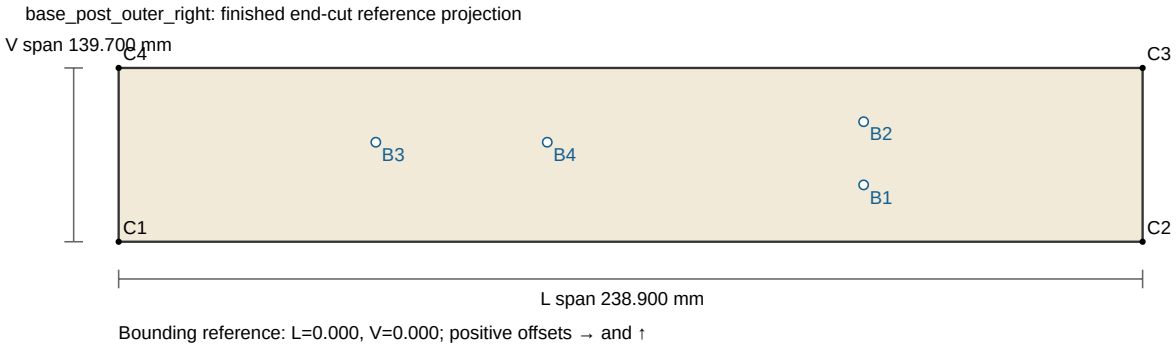

Corner stations C1 (0.000, 0.000); C2 (238.900, 0.000); C3 (238.900, 139.700); C4 (0.000, 139.700)

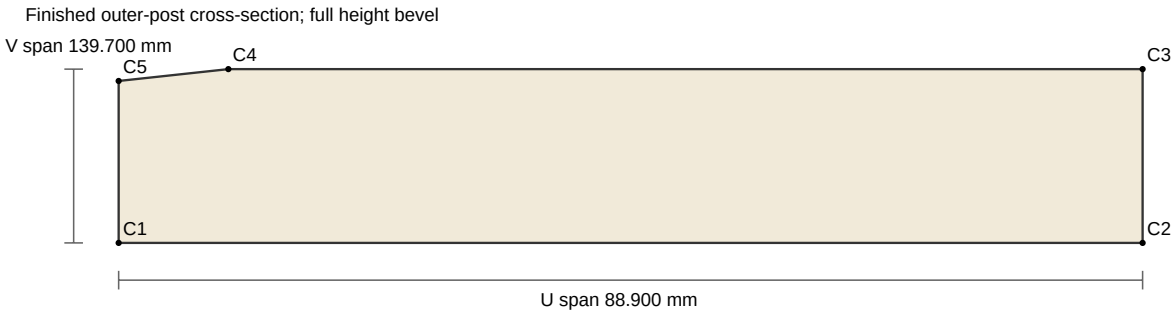

Corner stations C1 (0.000, 0.000); C2 (88.900, 0.000); C3 (88.900, 139.700); C4 (9.525, 139.700); C5 (0.000, 130.175)

9.525×9.525 mm, 45° longitudinal corner bevel for full L 0–238.9 mm. Left: U 88.9/V 139.7 corner; right: U 0/V 139.7 corner. This feature is absent from raw box vertices.

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	cleat_post_bolt_right_1	(173.812, 88.900, 45.688)	(173.812, 0.000, 45.688)	(173.812, 45.688)
2	cleat_post_bolt_right_2	(173.812, 88.900, 96.487)	(173.812, 0.000, 96.487)	(173.812, 96.487)
3	rail_front_bolt_right_1	(60.000, 88.900, 80.000)	(60.000, 0.000, 80.000)	(60.000, 80.000)
4	rail_front_bolt_right_2	(100.000, 88.900, 80.000)	(100.000, 0.000, 80.000)	(100.000, 80.000)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 9.525, 139.700); (0.000, 88.900, 139.700); (0.000, 88.900, 0.000); (0.000, 0.000, 0.000); (0.000, 0.000, 130.175)
3 (historical source only)	(1.000, 0.000, 0.000)	238.900	(238.900, 88.900, 139.700); (238.900, 88.900, 0.000); (238.900, 0.000, 0.000); (238.900, 0.000, 130.175); (238.900, 9.525, 139.700)


Source member 6; finished-BRep SHA256 254b0fb978460398916edc03af5f5467427bb2746b87ec536d540d5eab40444a. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_principal_center_left

solid timber; quantity 1; stock 2x6; board S07. Finished L/U/V spans: (2455.367, 38.100, 139.700) mm.

Saved datum XYZ (-50.950, -182.700, 277.000). Positive L/U/V vectors: (0.000, 0.643, 0.766); (-1.000, 0.000, 0.000); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

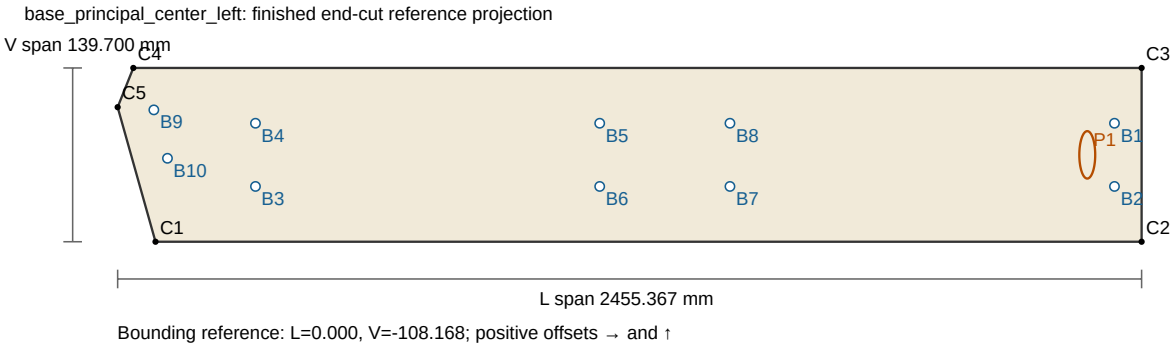

Corner stations C1 (90.763, -108.168); C2 (2455.367, -108.168); C3 (2455.367, 31.532); C4 (37.579, 31.532); C5 (0.000, 0.000)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_007	(2390.280, 38.100, -12.918)	(2390.280, 0.000, -12.918)	(2390.280, 95.250)
2	eoere_bolt_011	(2390.280, 38.100, -63.718)	(2390.280, 0.000, -63.718)	(2390.280, 44.450)
3	eoere_bolt_033	(330.480, 38.100, -63.718)	(330.480, 0.000, -63.718)	(330.480, 44.450)
4	eoere_bolt_037	(330.480, 38.100, -12.918)	(330.480, 0.000, -12.918)	(330.480, 95.250)
5	eoere_bolt_044	(1155.930, 38.100, -12.918)	(1155.930, 0.000, -12.918)	(1155.930, 95.250)
6	eoere_bolt_048	(1155.930, 38.100, -63.718)	(1155.930, 0.000, -63.718)	(1155.930, 44.450)
7	eoere_bolt_052	(1468.255, 38.100, -63.718)	(1468.255, 0.000, -63.718)	(1468.255, 44.450)
8	eoere_bolt_056	(1468.255, 38.100, -12.918)	(1468.255, 0.000, -12.918)	(1468.255, 95.250)
9	eoere_bolt_068	(86.788, 38.100, -2.172)	(86.788, 0.000, -2.172)	(86.788, 105.996)
10	eoere_bolt_072	(119.442, 38.100, -41.087)	(119.442, 0.000, -41.087)	(119.442, 67.081)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Retained enclosed service passages

Orange P outlines show the actual source Ø38.1 mm service openings in the L/V projection, with the same adjusted drawing proportions. These are separate from blue bolt/screw axis symbols and occupied bolt-bore envelopes. The recorded service-opening size is not a new drill-selection policy. Entry/exit follow the saved service route; the coordinate table retains the current finished bounding reference.

P	Service ID	Entry L/U/V (mm)	Exit L/U/V (mm)	Positive entry L/U/V offsets (mm)	Positive exit L/U/V offsets (mm)
1	wire_060_E12_F12	(2325.067, 0.000, -38.318)	(2325.067, 38.100, -38.318)	(2325.067, 0.000, 69.850)	(2325.067, 38.100, 69.850)

One current passage per principal and five per rail. F1–G1 retains its source +40 mm grain shift; older front-open channels and ten superseded T-nut recesses are not marked. Six rail finished solids match the passage receipt; the two principals inherit its passages through later bolt/end revisions with unchanged datum/basis.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
2 (historical source only)	(1.000, 0.000, 0.000)	2455.367	(2455.367, 38.100, -108.168); (2455.367, 0.000, -108.168); (2455.367, 0.000, 31.532); (2455.367, 38.100, 31.532)
4 (historical source only)	(-0.766, 0.000, -0.643)	0.000	(0.000, 0.000, 0.000); (0.000, 38.100, 0.000); (90.763, 0.000, -108.168); (90.763, 38.100, -108.168)
5 (historical source only)	(-0.643, 0.000, 0.766)	0.000	(37.579, 0.000, 31.532); (37.579, 38.100, 31.532); (0.000, 0.000, 0.000); (0.000, 38.100, 0.000)


Source member 7; finished-BRep SHA256 f0be538d115fe9358e88669720e1b105c0982623a8f69eb33fa2288dab6f77bb. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_principal_center_right

solid timber; quantity 1; stock 2x6; board S08. Finished L/U/V spans: (2455.367, 38.100, 139.700) mm.

Saved datum XYZ (49.850, -182.700, 277.000). Positive L/U/V vectors: (0.000, 0.643, 0.766); (-1.000, 0.000, 0.000); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

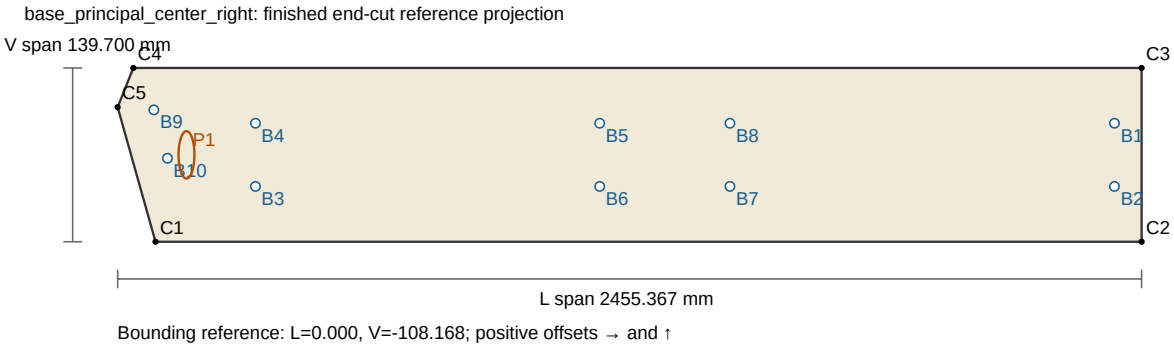

Corner stations C1 (90.763, -108.168); C2 (2455.367, -108.168); C3 (2455.367, 31.532); C4 (37.579, 31.532); C5 (0.000, 0.000)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_008	(2390.280, 0.000, -12.918)	(2390.280, 38.100, -12.918)	(2390.280, 95.250)
2	eoere_bolt_012	(2390.280, 0.000, -63.718)	(2390.280, 38.100, -63.718)	(2390.280, 44.450)
3	eoere_bolt_034	(330.480, 0.000, -63.718)	(330.480, 38.100, -63.718)	(330.480, 44.450)
4	eoere_bolt_038	(330.480, 0.000, -12.918)	(330.480, 38.100, -12.918)	(330.480, 95.250)
5	eoere_bolt_045	(1155.930, 0.000, -12.918)	(1155.930, 38.100, -12.918)	(1155.930, 95.250)
6	eoere_bolt_049	(1155.930, 0.000, -63.718)	(1155.930, 38.100, -63.718)	(1155.930, 44.450)
7	eoere_bolt_053	(1468.255, 0.000, -63.718)	(1468.255, 38.100, -63.718)	(1468.255, 44.450)
8	eoere_bolt_057	(1468.255, 0.000, -12.918)	(1468.255, 38.100, -12.918)	(1468.255, 95.250)
9	eoere_bolt_069	(86.788, 0.000, -2.172)	(86.788, 38.100, -2.172)	(86.788, 105.996)
10	eoere_bolt_073	(119.442, 0.000, -41.087)	(119.442, 38.100, -41.087)	(119.442, 67.081)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Retained enclosed service passages

Orange P outlines show the actual source Ø38.1 mm service openings in the L/V projection, with the same adjusted drawing proportions. These are separate from blue bolt/screw axis symbols and occupied bolt-bore envelopes. The recorded service-opening size is not a new drill-selection policy. Entry/exit follow the saved service route; the coordinate table retains the current finished bounding reference.

P	Service ID	Entry L/U/V (mm)	Exit L/U/V (mm)	Positive entry L/U/V offsets (mm)	Positive exit L/U/V offsets (mm)
1	wire_072_F1_G1	(165.067, 0.000, -38.318)	(165.067, 38.100, -38.318)	(165.067, 0.000, 69.850)	(165.067, 38.100, 69.850)

One current passage per principal and five per rail. F1–G1 retains its source +40 mm grain shift; older front-open channels and ten superseded T-nut recesses are not marked. Six rail finished solids match the passage receipt; the two principals inherit its passages through later bolt/end revisions with unchanged datum/basis.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
2 (historical source only)	(1.000, 0.000, 0.000)	2455.367	(2455.367, 38.100, -108.168); (2455.367, 0.000, -108.168); (2455.367, 0.000, 31.532); (2455.367, 38.100, 31.532)
4 (historical source only)	(-0.766, 0.000, -0.643)	0.000	(0.000, 0.000, 0.000); (0.000, 38.100, 0.000); (90.763, 0.000, -108.168); (90.763, 38.100, -108.168)
5 (historical source only)	(-0.643, 0.000, 0.766)	0.000	(37.579, 0.000, 31.532); (37.579, 38.100, 31.532); (0.000, 0.000, 0.000); (0.000, 38.100, 0.000)


Source member 8; finished-BRep SHA256 d626e0003b3b18e711950a879bedcc92a287fdecb26ccb0da19013aeab81f9b4. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_rail_bottom_left

solid timber; quantity 1; stock 2x6; board S03. Finished L/U/V spans: (1041.250, 38.100, 139.700) mm.

Saved datum XYZ (-1130.300, 46.262, 381.587). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.643, 0.766); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

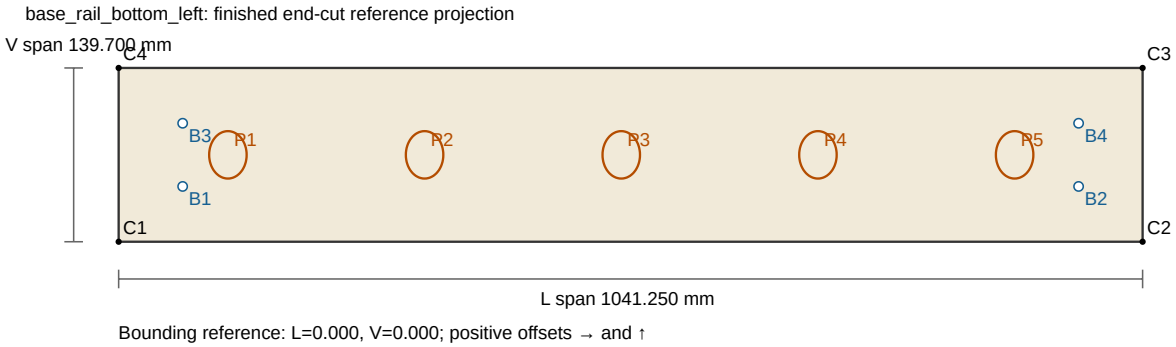

Corner stations C1 (0.000, 0.000); C2 (1041.250, 0.000); C3 (1041.250, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_002	(65.087, 38.100, 44.450)	(65.087, 0.000, 44.450)	(65.087, 44.450)
2	eoere_bolt_019	(976.162, 38.100, 44.450)	(976.162, 0.000, 44.450)	(976.162, 44.450)
3	eoere_bolt_029	(65.087, 38.100, 95.250)	(65.087, 0.000, 95.250)	(65.087, 95.250)
4	eoere_bolt_040	(976.162, 38.100, 95.250)	(976.162, 0.000, 95.250)	(976.162, 95.250)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Retained enclosed service passages

Orange P outlines show the actual source Ø38.1 mm service openings in the L/V projection, with the same adjusted drawing proportions. These are separate from blue bolt/screw axis symbols and occupied bolt-bore envelopes. The recorded service-opening size is not a new drill-selection policy. Entry/exit follow the saved service route; the coordinate table retains the current finished bounding reference.

P	Service ID	Entry L/U/V (mm)	Exit L/U/V (mm)	Positive entry L/U/V offsets (mm)	Positive exit L/U/V offsets (mm)
1	wire_001_A1_A2	(111.100, 0.000, 69.850)	(111.100, 38.100, 69.850)	(111.100, 0.000, 69.850)	(111.100, 38.100, 69.850)
2	wire_023_B2_B1	(311.100, 0.000, 69.850)	(311.100, 38.100, 69.850)	(311.100, 0.000, 69.850)	(311.100, 38.100, 69.850)
3	wire_025_C1_C2	(511.100, 0.000, 69.850)	(511.100, 38.100, 69.850)	(511.100, 0.000, 69.850)	(511.100, 38.100, 69.850)
4	wire_047_D2_D1	(711.100, 0.000, 69.850)	(711.100, 38.100, 69.850)	(711.100, 0.000, 69.850)	(711.100, 38.100, 69.850)
5	wire_049_E1_E2	(911.100, 0.000, 69.850)	(911.100, 38.100, 69.850)	(911.100, 0.000, 69.850)	(911.100, 38.100, 69.850)

One current passage per principal and five per rail. F1–G1 retains its source +40 mm grain shift; older front-open channels and ten superseded T-nut recesses are not marked. Six rail finished solids match the passage receipt; the two principals inherit its passages through later bolt/end revisions with unchanged datum/basis.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 139.700); (0.000, 38.100, 139.700); (0.000, 0.000, 0.000); (0.000, 38.100, 0.000)
2 (historical source only)	(1.000, 0.000, 0.000)	1041.250	(1041.250, 0.000, 0.000); (1041.250, 38.100, 0.000); (1041.250, 0.000, 139.700); (1041.250, 38.100, 139.700)


Source member 9; finished-BRep SHA256 af3c5557be90c2b2dffbb306b1842ee3e09429c2a66fb15a1653b3f85c84cad5. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_rail_bottom_right

solid timber; quantity 1; stock 2x6; board S03. Finished L/U/V spans: (1077.275, 38.100, 139.700) mm.

Saved datum XYZ (49.850, 46.262, 381.587). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.643, 0.766); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

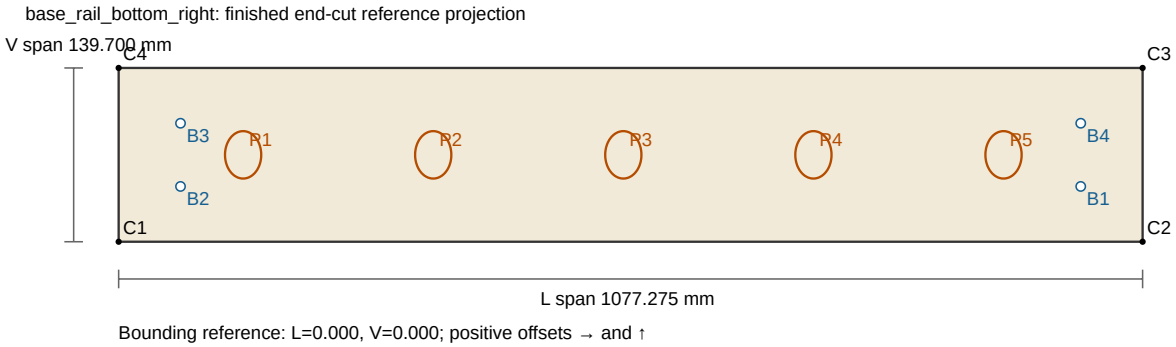

Corner stations C1 (0.000, 0.000); C2 (1077.275, 0.000); C3 (1077.275, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_014	(1012.187, 38.100, 44.450)	(1012.187, 0.000, 44.450)	(1012.187, 44.450)
2	eoere_bolt_025	(65.087, 38.100, 44.450)	(65.087, 0.000, 44.450)	(65.087, 44.450)
3	eoere_bolt_059	(65.087, 38.100, 95.250)	(65.087, 0.000, 95.250)	(65.087, 95.250)
4	eoere_bolt_062	(1012.187, 38.100, 95.250)	(1012.187, 0.000, 95.250)	(1012.187, 95.250)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Retained enclosed service passages

Orange P outlines show the actual source Ø38.1 mm service openings in the L/V projection, with the same adjusted drawing proportions. These are separate from blue bolt/screw axis symbols and occupied bolt-bore envelopes. The recorded service-opening size is not a new drill-selection policy. Entry/exit follow the saved service route; the coordinate table retains the current finished bounding reference.

P	Service ID	Entry L/U/V (mm)	Exit L/U/V (mm)	Positive entry L/U/V offsets (mm)	Positive exit L/U/V offsets (mm)
1	wire_073_G1_G2	(130.950, 0.000, 69.850)	(130.950, 38.100, 69.850)	(130.950, 0.000, 69.850)	(130.950, 38.100, 69.850)
2	wire_095_H2_H1	(330.950, 0.000, 69.850)	(330.950, 38.100, 69.850)	(330.950, 0.000, 69.850)	(330.950, 38.100, 69.850)
3	wire_097_I1_I2	(530.950, 0.000, 69.850)	(530.950, 38.100, 69.850)	(530.950, 0.000, 69.850)	(530.950, 38.100, 69.850)
4	wire_119_J2_J1	(730.950, 0.000, 69.850)	(730.950, 38.100, 69.850)	(730.950, 0.000, 69.850)	(730.950, 38.100, 69.850)
5	wire_121_K1_K2	(930.950, 0.000, 69.850)	(930.950, 38.100, 69.850)	(930.950, 0.000, 69.850)	(930.950, 38.100, 69.850)

One current passage per principal and five per rail. F1–G1 retains its source +40 mm grain shift; older front-open channels and ten superseded T-nut recesses are not marked. Six rail finished solids match the passage receipt; the two principals inherit its passages through later bolt/end revisions with unchanged datum/basis.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 139.700); (0.000, 38.100, 139.700); (0.000, 0.000, 0.000); (0.000, 38.100, 0.000)
2 (historical source only)	(1.000, 0.000, 0.000)	1077.275	(1077.275, 0.000, 0.000); (1077.275, 38.100, 0.000); (1077.275, 0.000, 139.700); (1077.275, 38.100, 139.700)


Source member 10; finished-BRep SHA256 d0c4a0c75c5762a7a1fe79f93b8d2b9d45bbe31b8d042a7dd45e46c2dbe68186. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_rail_service_lower_left

solid timber; quantity 1; stock 2x6; board S04. Finished L/U/V spans: (1041.250, 38.100, 139.700) mm.

Saved datum XYZ (-1130.300, 685.016, 1142.825). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.643, 0.766); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

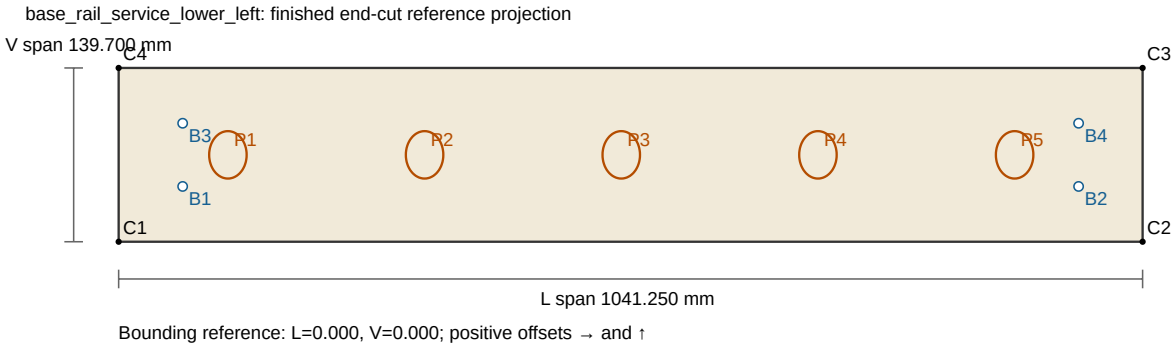

Corner stations C1 (0.000, 0.000); C2 (1041.250, 0.000); C3 (1041.250, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_003	(65.087, 0.000, 44.450)	(65.087, 38.100, 44.450)	(65.087, 44.450)
2	eoere_bolt_020	(976.162, 0.000, 44.450)	(976.162, 38.100, 44.450)	(976.162, 44.450)
3	eoere_bolt_030	(65.087, 0.000, 95.250)	(65.087, 38.100, 95.250)	(65.087, 95.250)
4	eoere_bolt_041	(976.162, 0.000, 95.250)	(976.162, 38.100, 95.250)	(976.162, 95.250)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Retained enclosed service passages

Orange P outlines show the actual source Ø38.1 mm service openings in the L/V projection, with the same adjusted drawing proportions. These are separate from blue bolt/screw axis symbols and occupied bolt-bore envelopes. The recorded service-opening size is not a new drill-selection policy. Entry/exit follow the saved service route; the coordinate table retains the current finished bounding reference.

P	Service ID	Entry L/U/V (mm)	Exit L/U/V (mm)	Positive entry L/U/V offsets (mm)	Positive exit L/U/V offsets (mm)
1	wire_006_A6_A7	(111.100, 0.000, 69.850)	(111.100, 38.100, 69.850)	(111.100, 0.000, 69.850)	(111.100, 38.100, 69.850)
2	wire_018_B7_B6	(311.100, 0.000, 69.850)	(311.100, 38.100, 69.850)	(311.100, 0.000, 69.850)	(311.100, 38.100, 69.850)
3	wire_030_C6_C7	(511.100, 0.000, 69.850)	(511.100, 38.100, 69.850)	(511.100, 0.000, 69.850)	(511.100, 38.100, 69.850)
4	wire_042_D7_D6	(711.100, 0.000, 69.850)	(711.100, 38.100, 69.850)	(711.100, 0.000, 69.850)	(711.100, 38.100, 69.850)
5	wire_054_E6_E7	(911.100, 0.000, 69.850)	(911.100, 38.100, 69.850)	(911.100, 0.000, 69.850)	(911.100, 38.100, 69.850)

One current passage per principal and five per rail. F1–G1 retains its source +40 mm grain shift; older front-open channels and ten superseded T-nut recesses are not marked. Six rail finished solids match the passage receipt; the two principals inherit its passages through later bolt/end revisions with unchanged datum/basis.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 139.700); (0.000, 38.100, 139.700); (0.000, 0.000, 0.000); (0.000, 38.100, 0.000)
2 (historical source only)	(1.000, 0.000, 0.000)	1041.250	(1041.250, 0.000, 0.000); (1041.250, 38.100, 0.000); (1041.250, 0.000, 139.700); (1041.250, 38.100, 139.700)


Source member 11; finished-BRep SHA256 028bdb33ae4cb602a92abeeb347564ba03f63a67fc6fa36f023b1839dac9e367. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_rail_service_lower_right

solid timber; quantity 1; stock 2x6; board S04. Finished L/U/V spans: (1077.275, 38.100, 139.700) mm.

Saved datum XYZ (49.850, 685.016, 1142.825). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.643, 0.766); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

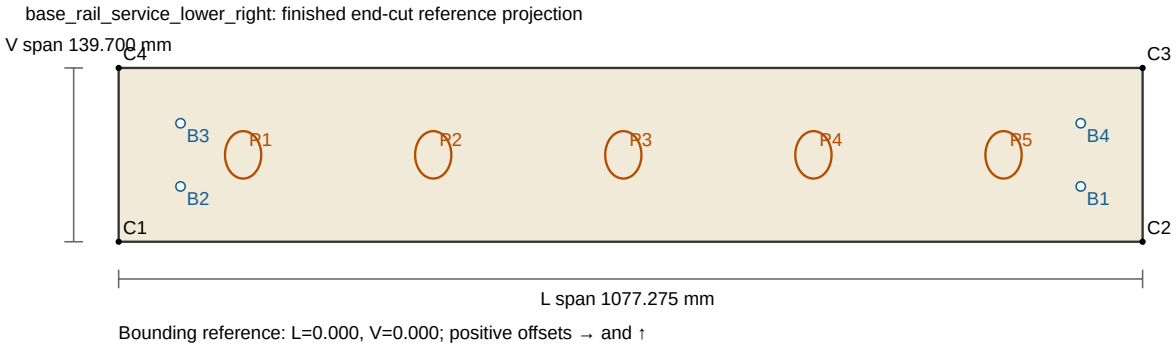

Corner stations C1 (0.000, 0.000); C2 (1077.275, 0.000); C3 (1077.275, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_015	(1012.187, 0.000, 44.450)	(1012.187, 38.100, 44.450)	(1012.187, 44.450)
2	eoere_bolt_026	(65.087, 0.000, 44.450)	(65.087, 38.100, 44.450)	(65.087, 44.450)
3	eoere_bolt_060	(65.087, 0.000, 95.250)	(65.087, 38.100, 95.250)	(65.087, 95.250)
4	eoere_bolt_063	(1012.187, 0.000, 95.250)	(1012.187, 38.100, 95.250)	(1012.187, 95.250)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Retained enclosed service passages

Orange P outlines show the actual source Ø38.1 mm service openings in the L/V projection, with the same adjusted drawing proportions. These are separate from blue bolt/screw axis symbols and occupied bolt-bore envelopes. The recorded service-opening size is not a new drill-selection policy. Entry/exit follow the saved service route; the coordinate table retains the current finished bounding reference.

P	Service ID	Entry L/U/V (mm)	Exit L/U/V (mm)	Positive entry L/U/V offsets (mm)	Positive exit L/U/V offsets (mm)
1	wire_078_G6_G7	(130.950, 0.000, 69.850)	(130.950, 38.100, 69.850)	(130.950, 0.000, 69.850)	(130.950, 38.100, 69.850)
2	wire_090_H7_H6	(330.950, 0.000, 69.850)	(330.950, 38.100, 69.850)	(330.950, 0.000, 69.850)	(330.950, 38.100, 69.850)
3	wire_102_I6_I7	(530.950, 0.000, 69.850)	(530.950, 38.100, 69.850)	(530.950, 0.000, 69.850)	(530.950, 38.100, 69.850)
4	wire_114_J7_J6	(730.950, 0.000, 69.850)	(730.950, 38.100, 69.850)	(730.950, 0.000, 69.850)	(730.950, 38.100, 69.850)
5	wire_126_K6_K7	(930.950, 0.000, 69.850)	(930.950, 38.100, 69.850)	(930.950, 0.000, 69.850)	(930.950, 38.100, 69.850)

One current passage per principal and five per rail. F1–G1 retains its source +40 mm grain shift; older front-open channels and ten superseded T-nut recesses are not marked. Six rail finished solids match the passage receipt; the two principals inherit its passages through later bolt/end revisions with unchanged datum/basis.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 139.700); (0.000, 38.100, 139.700); (0.000, 0.000, 0.000); (0.000, 38.100, 0.000)
2 (historical source only)	(1.000, 0.000, 0.000)	1077.275	(1077.275, 0.000, 0.000); (1077.275, 38.100, 0.000); (1077.275, 0.000, 139.700); (1077.275, 38.100, 139.700)


Source member 12; finished-BRep SHA256 daed7bb69bd298a2f86a346eaa6d7019fe86c6a8b350a13aff9f8df7e93cb4ed. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_rail_service_upper_left

solid timber; quantity 1; stock 2x6; board S05. Finished L/U/V spans: (1041.250, 38.100, 139.700) mm.

Saved datum XYZ (-1130.300, 670.593, 1342.971). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.643, 0.766); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

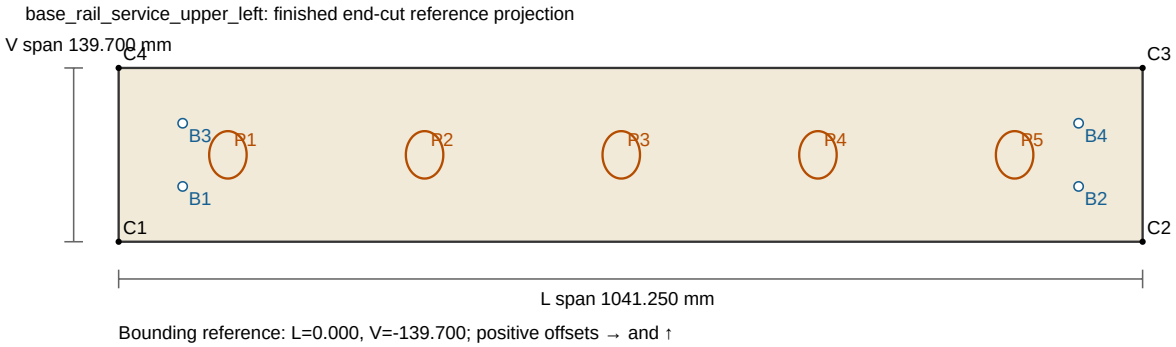

Corner stations C1 (0.000, -139.700); C2 (1041.250, -139.700); C3 (1041.250, 0.000); C4 (0.000, 0.000)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_004	(65.087, 38.100, -95.250)	(65.087, 0.000, -95.250)	(65.087, 44.450)
2	eoere_bolt_021	(976.162, 38.100, -95.250)	(976.162, 0.000, -95.250)	(976.162, 44.450)
3	eoere_bolt_031	(65.087, 38.100, -44.450)	(65.087, 0.000, -44.450)	(65.087, 95.250)
4	eoere_bolt_042	(976.162, 38.100, -44.450)	(976.162, 0.000, -44.450)	(976.162, 95.250)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Retained enclosed service passages

Orange P outlines show the actual source Ø38.1 mm service openings in the L/V projection, with the same adjusted drawing proportions. These are separate from blue bolt/screw axis symbols and occupied bolt-bore envelopes. The recorded service-opening size is not a new drill-selection policy. Entry/exit follow the saved service route; the coordinate table retains the current finished bounding reference.

P	Service ID	Entry L/U/V (mm)	Exit L/U/V (mm)	Positive entry L/U/V offsets (mm)	Positive exit L/U/V offsets (mm)
1	wire_007_A7_A8	(111.100, 0.000, -69.850)	(111.100, 38.100, -69.850)	(111.100, 0.000, 69.850)	(111.100, 38.100, 69.850)
2	wire_017_B8_B7	(311.100, 0.000, -69.850)	(311.100, 38.100, -69.850)	(311.100, 0.000, 69.850)	(311.100, 38.100, 69.850)
3	wire_031_C7_C8	(511.100, 0.000, -69.850)	(511.100, 38.100, -69.850)	(511.100, 0.000, 69.850)	(511.100, 38.100, 69.850)
4	wire_041_D8_D7	(711.100, 0.000, -69.850)	(711.100, 38.100, -69.850)	(711.100, 0.000, 69.850)	(711.100, 38.100, 69.850)
5	wire_055_E7_E8	(911.100, 0.000, -69.850)	(911.100, 38.100, -69.850)	(911.100, 0.000, 69.850)	(911.100, 38.100, 69.850)

One current passage per principal and five per rail. F1–G1 retains its source +40 mm grain shift; older front-open channels and ten superseded T-nut recesses are not marked. Six rail finished solids match the passage receipt; the two principals inherit its passages through later bolt/end revisions with unchanged datum/basis.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 0.000); (0.000, 38.100, 0.000); (0.000, 0.000, -139.700); (0.000, 38.100, -139.700)
2 (historical source only)	(1.000, 0.000, 0.000)	1041.250	(1041.250, 0.000, -139.700); (1041.250, 38.100, -139.700); (1041.250, 0.000, 0.000); (1041.250, 38.100, 0.000)


Source member 13; finished-BRep SHA256 02e873f347b3a2afefab24b9e36e8dcfa84911e7300e152ae82ab0db427a5970. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_rail_service_upper_right

solid timber; quantity 1; stock 2x6; board S05. Finished L/U/V spans: (1077.275, 38.100, 139.700) mm.

Saved datum XYZ (49.850, 670.593, 1342.971). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.643, 0.766); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

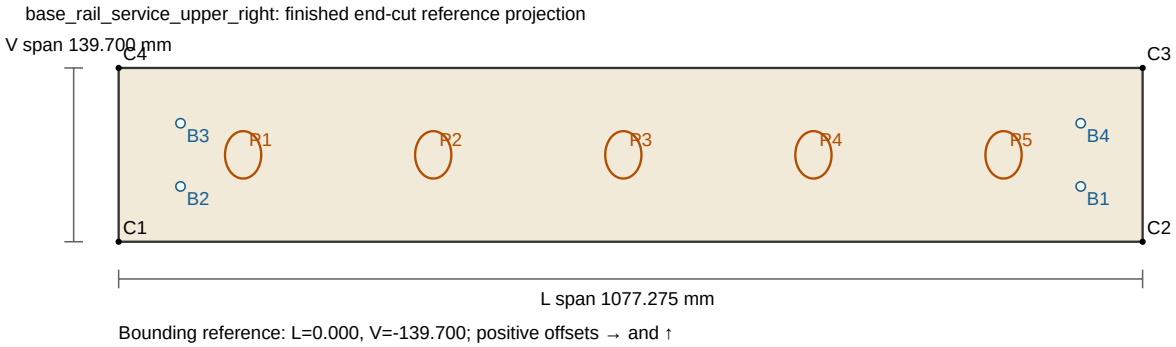

Corner stations C1 (0.000, -139.700); C2 (1077.275, -139.700); C3 (1077.275, 0.000); C4 (0.000, 0.000)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_016	(1012.187, 38.100, -95.250)	(1012.187, 0.000, -95.250)	(1012.187, 44.450)
2	eoere_bolt_027	(65.087, 38.100, -95.250)	(65.087, 0.000, -95.250)	(65.087, 44.450)
3	eoere_bolt_061	(65.087, 38.100, -44.450)	(65.087, 0.000, -44.450)	(65.087, 95.250)
4	eoere_bolt_064	(1012.187, 38.100, -44.450)	(1012.187, 0.000, -44.450)	(1012.187, 95.250)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Retained enclosed service passages

Orange P outlines show the actual source Ø38.1 mm service openings in the L/V projection, with the same adjusted drawing proportions. These are separate from blue bolt/screw axis symbols and occupied bolt-bore envelopes. The recorded service-opening size is not a new drill-selection policy. Entry/exit follow the saved service route; the coordinate table retains the current finished bounding reference.

P	Service ID	Entry L/U/V (mm)	Exit L/U/V (mm)	Positive entry L/U/V offsets (mm)	Positive exit L/U/V offsets (mm)
1	wire_079_G7_G8	(130.950, 0.000, -69.850)	(130.950, 38.100, -69.850)	(130.950, 0.000, 69.850)	(130.950, 38.100, 69.850)
2	wire_089_H8_H7	(330.950, 0.000, -69.850)	(330.950, 38.100, -69.850)	(330.950, 0.000, 69.850)	(330.950, 38.100, 69.850)
3	wire_103_I7_I8	(530.950, 0.000, -69.850)	(530.950, 38.100, -69.850)	(530.950, 0.000, 69.850)	(530.950, 38.100, 69.850)
4	wire_113_J8_J7	(730.950, 0.000, -69.850)	(730.950, 38.100, -69.850)	(730.950, 0.000, 69.850)	(730.950, 38.100, 69.850)
5	wire_127_K7_K8	(930.950, 0.000, -69.850)	(930.950, 38.100, -69.850)	(930.950, 0.000, 69.850)	(930.950, 38.100, 69.850)

One current passage per principal and five per rail. F1–G1 retains its source +40 mm grain shift; older front-open channels and ten superseded T-nut recesses are not marked. Six rail finished solids match the passage receipt; the two principals inherit its passages through later bolt/end revisions with unchanged datum/basis.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 0.000); (0.000, 38.100, 0.000); (0.000, 0.000, -139.700); (0.000, 38.100, -139.700)
2 (historical source only)	(1.000, 0.000, 0.000)	1077.275	(1077.275, 0.000, -139.700); (1077.275, 38.100, -139.700); (1077.275, 0.000, 0.000); (1077.275, 38.100, 0.000)


Source member 14; finished-BRep SHA256 bb4cc7a4b6c136cc513c8ba6ba05780f6a6415eb051c5f402618e092eb615e5d. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_rail_top

solid timber; quantity 1; stock 4x6; board S11. Finished L/U/V spans: (2257.425, 88.900, 139.700) mm.

Saved datum XYZ (-1130.300, 1511.094, 2127.307). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.643, 0.766); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

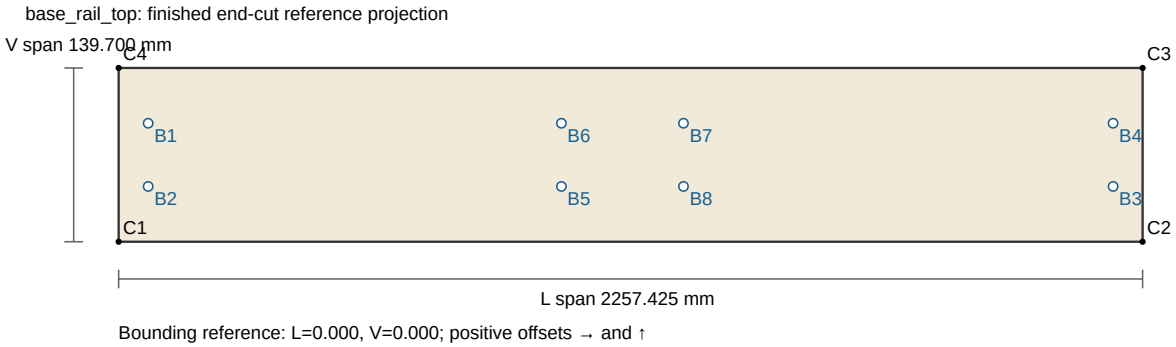

Corner stations C1 (0.000, 0.000); C2 (2257.425, 0.000); C3 (2257.425, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_001	(65.087, 38.100, 95.250)	(65.087, -50.800, 95.250)	(65.087, 95.250)
2	eoere_bolt_005	(65.087, 38.100, 44.450)	(65.087, -50.800, 44.450)	(65.087, 44.450)
3	eoere_bolt_017	(2192.337, 38.100, 44.450)	(2192.337, -50.800, 44.450)	(2192.337, 44.450)
4	eoere_bolt_018	(2192.337, 38.100, 95.250)	(2192.337, -50.800, 95.250)	(2192.337, 95.250)
5	eoere_bolt_022	(976.162, 38.100, 44.450)	(976.162, -50.800, 44.450)	(976.162, 44.450)
6	eoere_bolt_023	(976.162, 38.100, 95.250)	(976.162, -50.800, 95.250)	(976.162, 95.250)
7	eoere_bolt_024	(1245.237, 38.100, 95.250)	(1245.237, -50.800, 95.250)	(1245.237, 95.250)
8	eoere_bolt_028	(1245.237, 38.100, 44.450)	(1245.237, -50.800, 44.450)	(1245.237, 44.450)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
15 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 38.100, 139.700); (0.000, 38.100, 0.000); (0.000, -50.800, 139.700); (0.000, -50.800, 0.000); (0.000, 0.000, 0.000)
17 (historical source only)	(1.000, 0.000, 0.000)	2257.425	(2257.425, 38.100, 139.700); (2257.425, 38.100, 0.000); (2257.425, -50.800, 139.700); (2257.425, -50.800, 0.000); (2257.425, 0.000, 0.000)


Source member 15; finished-BRep SHA256 73bf29cdfca92ead9bcd30dd8a0cf6f78109fd1c747acdf64c34e55aeb18feb5. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_side_left

solid timber; quantity 1; stock 4x6; board S12. Finished L/U/V spans: (2539.768, 88.900, 139.700) mm.

Saved datum XYZ (-1130.300, -175.700, 277.000). Positive L/U/V vectors: (0.000, 0.643, 0.766); (-1.000, 0.000, 0.000); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

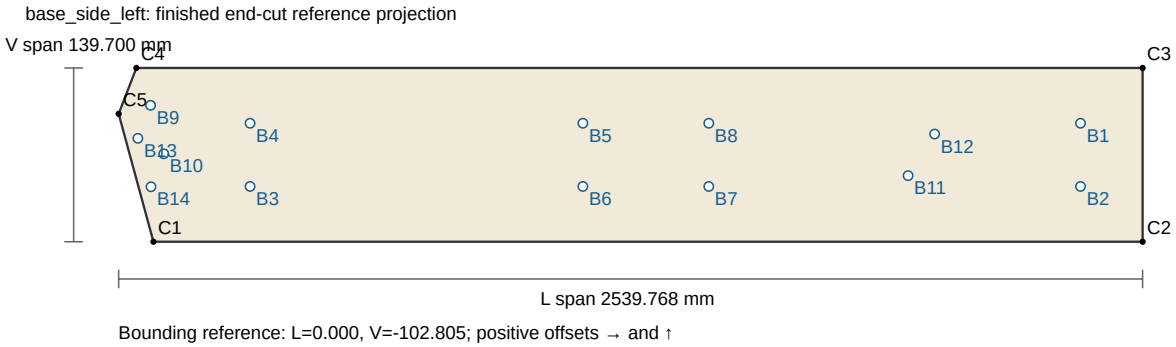

Corner stations C1 (86.264, -102.805); C2 (2539.768, -102.805); C3 (2539.768, 36.895); C4 (43.970, 36.895); C5 (0.000, 0.000)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_006	(2385.780, 88.900, -7.555)	(2385.780, 0.000, -7.555)	(2385.780, 95.250)
2	eoere_bolt_010	(2385.780, 88.900, -58.355)	(2385.780, 0.000, -58.355)	(2385.780, 44.450)
3	eoere_bolt_032	(325.980, 88.900, -58.355)	(325.980, 0.000, -58.355)	(325.980, 44.450)
4	eoere_bolt_036	(325.980, 88.900, -7.555)	(325.980, 0.000, -7.555)	(325.980, 95.250)
5	eoere_bolt_043	(1151.430, 88.900, -7.555)	(1151.430, 0.000, -7.555)	(1151.430, 95.250)
6	eoere_bolt_047	(1151.430, 88.900, -58.355)	(1151.430, 0.000, -58.355)	(1151.430, 44.450)
7	eoere_bolt_051	(1463.755, 88.900, -58.355)	(1463.755, 0.000, -58.355)	(1463.755, 44.450)
8	eoere_bolt_055	(1463.755, 88.900, -7.555)	(1463.755, 0.000, -7.555)	(1463.755, 95.250)
9	eoere_bolt_067	(79.227, 88.900, 6.839)	(79.227, 0.000, 6.839)	(79.227, 109.644)
10	eoere_bolt_071	(111.881, 88.900, -32.076)	(111.881, 0.000, -32.076)	(111.881, 70.729)
11	lumber_leg_bolt_left_1	(1958.097, 88.900, -49.669)	(1958.097, 0.000, -49.669)	(1958.097, 53.136)
12	proposal_upper_rear_left_added_half_in	(2023.933, 88.900, -16.242)	(2023.933, 0.000, -16.242)	(2023.933, 86.564)
13	v11_cleat_left_side_1	(47.609, 88.900, -19.692)	(47.609, 0.000, -19.692)	(47.609, 83.113)
14	v11_cleat_left_side_2	(80.262, 88.900, -58.607)	(80.262, 0.000, -58.607)	(80.262, 44.198)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-0.766, 0.000, -0.643)	0.000	(0.000, 0.000, 0.000); (0.000, 88.900, 0.000); (86.264, 88.900, -102.805); (86.264, 0.000, -102.805)
3 (historical source only)	(-0.643, 0.000, 0.766)	0.000	(0.000, 0.000, 0.000); (0.000, 88.900, 0.000); (43.970, 0.000, 36.895); (43.970, 88.900, 36.895)
4 (historical source only)	(1.000, 0.000, 0.000)	2539.768	(2539.768, 88.900, -102.805); (2539.768, 88.900, 36.895); (2539.768, 0.000, -102.805); (2539.768, 0.000, 36.895)


Source member 16; finished-BRep SHA256 e990e678372f89d6e16278d20747e3520da4a0be6a628c8cb1bb57086bdd52db. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

base_side_right

solid timber; quantity 1; stock 4x6; board S13. Finished L/U/V spans: (2539.768, 88.900, 139.700) mm.

Saved datum XYZ (1216.025, -175.700, 277.000). Positive L/U/V vectors: (0.000, 0.643, 0.766); (-1.000, 0.000, 0.000); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

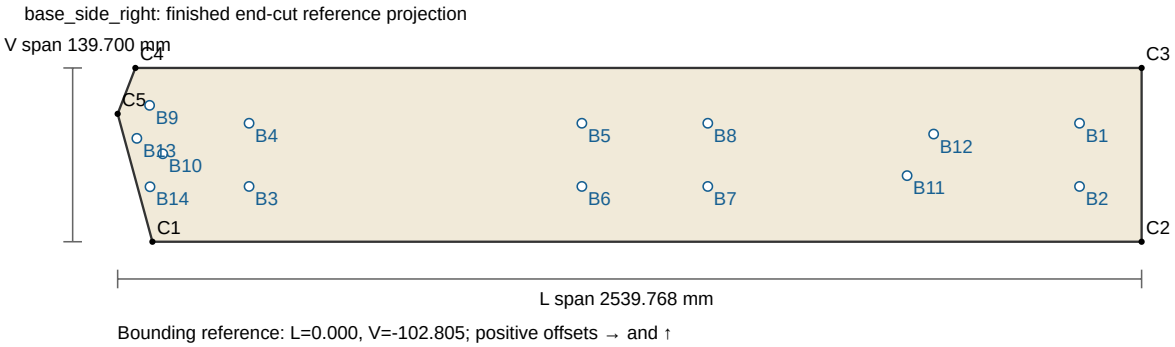

Corner stations C1 (86.264, -102.805); C2 (2539.768, -102.805); C3 (2539.768, 36.895); C4 (43.970, 36.895); C5 (0.000, 0.000)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	eoere_bolt_009	(2385.780, 0.000, -7.555)	(2385.780, 88.900, -7.555)	(2385.780, 95.250)
2	eoere_bolt_013	(2385.780, 0.000, -58.355)	(2385.780, 88.900, -58.355)	(2385.780, 44.450)
3	eoere_bolt_035	(325.980, 0.000, -58.355)	(325.980, 88.900, -58.355)	(325.980, 44.450)
4	eoere_bolt_039	(325.980, 0.000, -7.555)	(325.980, 88.900, -7.555)	(325.980, 95.250)
5	eoere_bolt_046	(1151.430, 0.000, -7.555)	(1151.430, 88.900, -7.555)	(1151.430, 95.250)
6	eoere_bolt_050	(1151.430, 0.000, -58.355)	(1151.430, 88.900, -58.355)	(1151.430, 44.450)
7	eoere_bolt_054	(1463.755, 0.000, -58.355)	(1463.755, 88.900, -58.355)	(1463.755, 44.450)
8	eoere_bolt_058	(1463.755, 0.000, -7.555)	(1463.755, 88.900, -7.555)	(1463.755, 95.250)
9	eoere_bolt_070	(79.227, 0.000, 6.839)	(79.227, 88.900, 6.839)	(79.227, 109.644)
10	eoere_bolt_074	(111.881, 0.000, -32.076)	(111.881, 88.900, -32.076)	(111.881, 70.729)
11	lumber_leg_bolt_right_1	(1958.097, 0.000, -49.669)	(1958.097, 88.900, -49.669)	(1958.097, 53.136)
12	proposal_upper_rear_right_added_half_in	(2023.933, 0.000, -16.242)	(2023.933, 88.900, -16.242)	(2023.933, 86.564)
13	v11_cleat_right_side_1	(47.609, 0.000, -19.692)	(47.609, 88.900, -19.692)	(47.609, 83.113)
14	v11_cleat_right_side_2	(80.262, 0.000, -58.607)	(80.262, 88.900, -58.607)	(80.262, 44.198)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-0.766, 0.000, -0.643)	0.000	(0.000, 0.000, 0.000); (0.000, 88.900, 0.000); (86.264, 88.900, -102.805); (86.264, 0.000, -102.805)
3 (historical source only)	(-0.643, 0.000, 0.766)	0.000	(0.000, 0.000, 0.000); (0.000, 88.900, 0.000); (43.970, 0.000, 36.895); (43.970, 88.900, 36.895)
4 (historical source only)	(1.000, 0.000, 0.000)	2539.768	(2539.768, 88.900, -102.805); (2539.768, 88.900, 36.895); (2539.768, 0.000, -102.805); (2539.768, 0.000, 36.895)


Source member 17; finished-BRep SHA256 edd40e572ed561031185cdad8dbe31357c20a915442a8dc33c0cd427cfbf3683. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

eoere_cleat_left

plywood cleat leaf; quantity 1; stock nominal 3/4 plywood leaf; board plywood piece; no sheet nesting assigned. Finished L/U/V spans: (361.186, 19.050, 139.700) mm.

Saved datum XYZ (-1238.250, -175.700, 139.700). Positive L/U/V vectors: (0.000, 0.000, 1.000); (1.000, 0.000, 0.000); (0.000, 1.000, 0.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

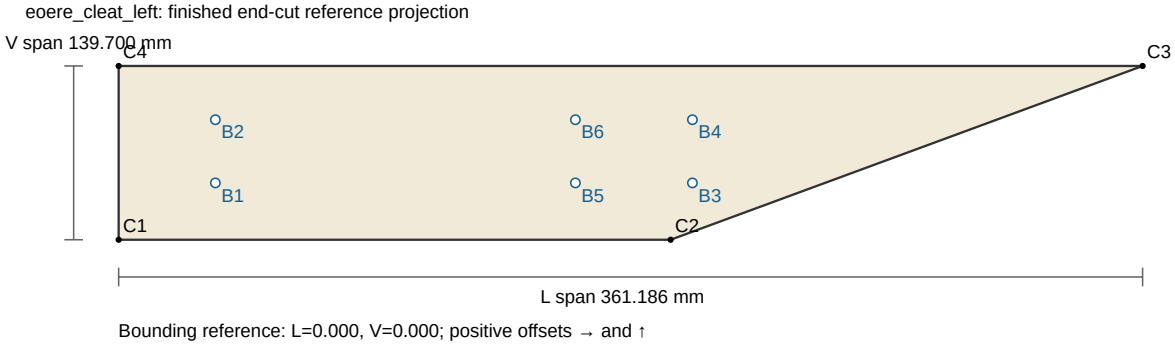

Corner stations C1 (0.000, 0.000); C2 (194.698, 0.000); C3 (361.186, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	cleat_post_bolt_left_1	(34.113, 0.000, 45.688)	(34.113, 19.050, 45.688)	(34.113, 45.688)
2	cleat_post_bolt_left_2	(34.113, 0.000, 96.487)	(34.113, 19.050, 96.487)	(34.113, 96.487)
3	eoere_bolt_067	(202.387, 0.000, 45.688)	(202.387, 19.050, 45.688)	(202.387, 45.688)
4	eoere_bolt_071	(202.387, 0.000, 96.487)	(202.387, 19.050, 96.487)	(202.387, 96.487)
5	v11_cleat_left_side_1	(161.113, 0.000, 45.688)	(161.113, 19.050, 45.688)	(161.113, 45.688)
6	v11_cleat_left_side_2	(161.113, 0.000, 96.487)	(161.113, 19.050, 96.487)	(161.113, 96.487)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
0 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 0.000); (0.000, 19.050, 0.000); (0.000, 0.000, 139.700); (0.000, 19.050, 139.700)
5 (historical source only)	(0.643, 0.000, -0.766)	125.150	(361.186, 0.000, 139.700); (361.186, 19.050, 139.700); (194.698, 0.000, 0.000); (194.698, 19.050, 0.000)


Source member 18; finished-BRep SHA256 0c79c25e41328320460ef988159d62683ee53bd9bd9642f1a240a6330c3c4f0f. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

eoere_cleat_left_outer

plywood cleat leaf; quantity 1; stock nominal 3/4 plywood leaf; board plywood piece; no sheet nesting assigned. Finished L/U/V spans: (361.186, 19.050, 139.700) mm.

Saved datum XYZ (-1257.300, -175.700, 139.700). Positive L/U/V vectors: (0.000, 0.000, 1.000); (1.000, 0.000, 0.000); (0.000, 1.000, 0.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

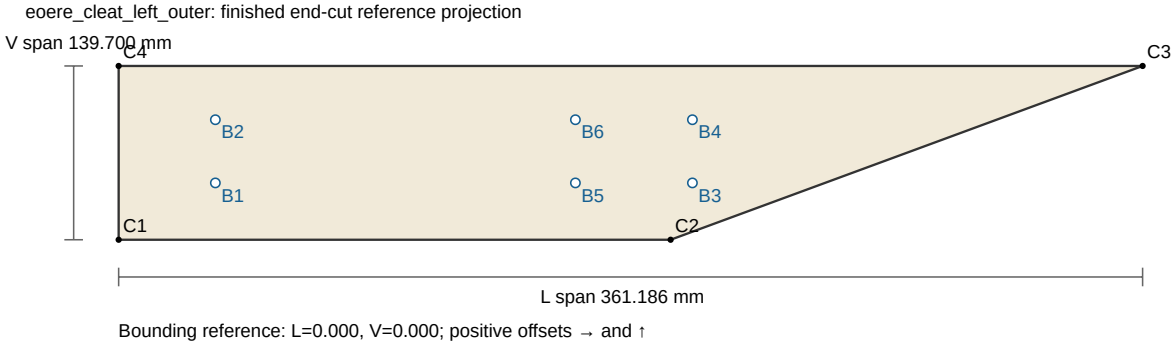

Corner stations C1 (0.000, 0.000); C2 (194.698, 0.000); C3 (361.186, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	cleat_post_bolt_left_1	(34.113, 0.000, 45.688)	(34.113, 19.050, 45.688)	(34.113, 45.688)
2	cleat_post_bolt_left_2	(34.113, 0.000, 96.487)	(34.113, 19.050, 96.487)	(34.113, 96.487)
3	eoere_bolt_067	(202.387, 0.000, 45.688)	(202.387, 19.050, 45.688)	(202.387, 45.688)
4	eoere_bolt_071	(202.387, 0.000, 96.487)	(202.387, 19.050, 96.487)	(202.387, 96.487)
5	v11_cleat_left_side_1	(161.113, 0.000, 45.688)	(161.113, 19.050, 45.688)	(161.113, 45.688)
6	v11_cleat_left_side_2	(161.113, 0.000, 96.487)	(161.113, 19.050, 96.487)	(161.113, 96.487)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
0 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 0.000); (0.000, 19.050, 0.000); (0.000, 0.000, 139.700); (0.000, 19.050, 139.700)
5 (historical source only)	(0.643, 0.000, -0.766)	125.150	(361.186, 0.000, 139.700); (361.186, 19.050, 139.700); (194.698, 0.000, 0.000); (194.698, 19.050, 0.000)


Source member 19; finished-BRep SHA256 8a35962ddaed556a80b3d91c9a646ec232c57943473d4accdb147b9d9b6f2f8f. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

eoere_cleat_right

plywood cleat leaf; quantity 1; stock nominal 3/4 plywood leaf; board plywood piece; no sheet nesting assigned. Finished L/U/V spans: (361.186, 19.050, 139.700) mm.

Saved datum XYZ (1216.025, -175.700, 139.700). Positive L/U/V vectors: (0.000, 0.000, 1.000); (1.000, 0.000, 0.000); (0.000, 1.000, 0.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

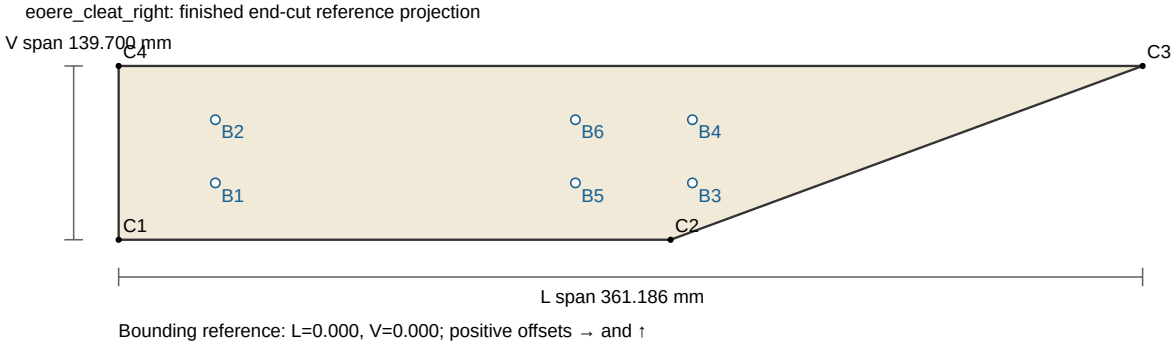

Bounding reference: L=0.000, V=0.000; positive offsets → and ↑

Corner stations C1 (0.000, 0.000); C2 (194.698, 0.000); C3 (361.186, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	cleat_post_bolt_right_1	(34.113, 19.050, 45.688)	(34.113, 0.000, 45.688)	(34.113, 45.688)
2	cleat_post_bolt_right_2	(34.113, 19.050, 96.487)	(34.113, 0.000, 96.487)	(34.113, 96.487)
3	eoere_bolt_070	(202.387, 19.050, 45.688)	(202.387, 0.000, 45.688)	(202.387, 45.688)
4	eoere_bolt_074	(202.387, 19.050, 96.487)	(202.387, 0.000, 96.487)	(202.387, 96.487)
5	v11_cleat_right_side_1	(161.113, 19.050, 45.688)	(161.113, 0.000, 45.688)	(161.113, 45.688)
6	v11_cleat_right_side_2	(161.113, 19.050, 96.487)	(161.113, 0.000, 96.487)	(161.113, 96.487)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
0 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 0.000); (0.000, 19.050, 0.000); (0.000, 0.000, 139.700); (0.000, 19.050, 139.700)
5 (historical source only)	(0.643, 0.000, -0.766)	125.150	(361.186, 0.000, 139.700); (361.186, 19.050, 139.700); (194.698, 0.000, 0.000); (194.698, 19.050, 0.000)


Source member 20; finished-BRep SHA256 cd02b9a2a0cf421622fffdc67e11b17f919e6154dd98f42cafda17b1b6b2e278. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

eoere_cleat_right_outer

plywood cleat leaf; quantity 1; stock nominal 3/4 plywood leaf; board plywood piece; no sheet nesting assigned. Finished L/U/V spans: (361.186, 19.050, 139.700) mm.

Saved datum XYZ (1235.075, -175.700, 139.700). Positive L/U/V vectors: (0.000, 0.000, 1.000); (1.000, 0.000, 0.000); (0.000, 1.000, 0.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

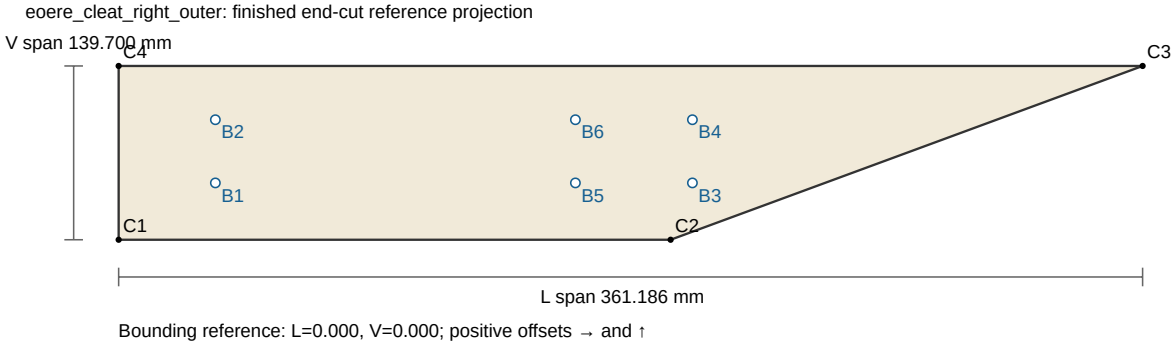

Bounding reference: L=0.000, V=0.000; positive offsets → and ↑

Corner stations C1 (0.000, 0.000); C2 (194.698, 0.000); C3 (361.186, 139.700); C4 (0.000, 139.700)

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	cleat_post_bolt_right_1	(34.113, 19.050, 45.688)	(34.113, 0.000, 45.688)	(34.113, 45.688)
2	cleat_post_bolt_right_2	(34.113, 19.050, 96.487)	(34.113, 0.000, 96.487)	(34.113, 96.487)
3	eoere_bolt_070	(202.387, 19.050, 45.688)	(202.387, 0.000, 45.688)	(202.387, 45.688)
4	eoere_bolt_074	(202.387, 19.050, 96.487)	(202.387, 0.000, 96.487)	(202.387, 96.487)
5	v11_cleat_right_side_1	(161.113, 19.050, 45.688)	(161.113, 0.000, 45.688)	(161.113, 45.688)
6	v11_cleat_right_side_2	(161.113, 19.050, 96.487)	(161.113, 0.000, 96.487)	(161.113, 96.487)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
0 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 0.000, 0.000); (0.000, 19.050, 0.000); (0.000, 0.000, 139.700); (0.000, 19.050, 139.700)
5 (historical source only)	(0.643, 0.000, -0.766)	125.150	(361.186, 0.000, 139.700); (361.186, 19.050, 139.700); (194.698, 0.000, 0.000); (194.698, 19.050, 0.000)


Source member 21; finished-BRep SHA256 97076b87cc365369419022999d55facc755fc1ecdf4d166b31058d52bbcab34f. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

kicker_left

face panel/kicker; quantity 1; stock existing face panel; board plywood piece; no sheet nesting assigned. Finished L/U/V spans: (1217.612, 277.000, 18.256) mm.

Saved datum XYZ (-1219.200, -36.000, 0.000). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.000, 1.000); (0.000, -1.000, 0.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

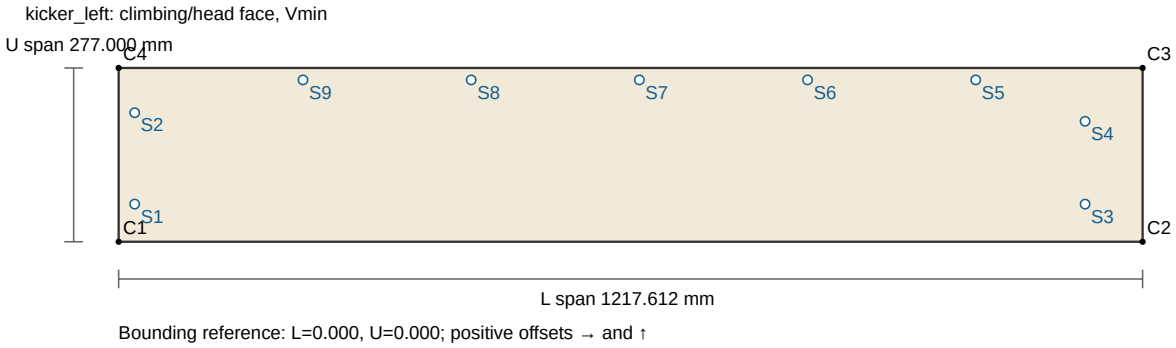

Corner stations C1 (0.000, 0.000); C2 (1217.612, 0.000); C3 (1217.612, 277.000); C4 (0.000, 277.000)

Physical climbing/screwhead face: Vmin=-18.256; timber/backing face: Vmax=0.000. S labels use front-face projection along each existing screw axis, never mirrored. Front/back L/U centers coincide for these normal axes.

S	Current screw ID	Receiver	Positive A/B from Lmin/Umin (mm)
1	round_kicker_left_rim_1	base_post_outer_left	(19.050, 60.000)
2	round_kicker_left_rim_2	base_post_outer_left	(19.050, 205.650)
3	round_kicker_left_center_1	base_post_center_left	(1149.200, 60.000)
4	round_kicker_left_center_2	base_post_center_left	(1149.200, 192.000)
5	kicker_header_left_1	base_header	(1019.200, 257.950)
6	kicker_header_left_2	base_header	(819.200, 257.950)
7	kicker_header_left_3	base_header	(619.200, 257.950)
8	kicker_header_left_4	base_header	(419.200, 257.950)
9	kicker_header_left_5	base_header	(219.200, 257.950)

Whole 277 mm front outline shown. Small modeled top-edge relief is not enlarged into a new cut or reconstructed from a hull. Existing end-section U/V vertices: (277.000, 0.000); (277.000, -18.000); (276.835, -18.196); (276.907, -18.256); (0.000, -18.256); (0.000, 0.000). This front view alone does not specify that tiny through-thickness edge detail.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
0 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 277.000, 0.000); (0.000, 277.000, -18.000); (0.000, 276.835, -18.196); (0.000, 276.907, -18.256); (0.000, 0.000, -18.256); (0.000, 0.000, 0.000)
7 (historical source only)	(1.000, 0.000, 0.000)	1217.612	(1217.612, 277.000, 0.000); (1217.612, 277.000, -18.000); (1217.612, 276.835, -18.196); (1217.612, 276.907, -18.256); (1217.612, 0.000, -18.256); (1217.612, 0.000, 0.000)


Source member 22; finished-BRep SHA256 c54ef94db5a9de6b1fc9e2f180b5ed5e8a9a06eed2bbcf39d217e08d783953b5. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

kicker_right

face panel/kicker; quantity 1; stock existing face panel; board plywood piece; no sheet nesting assigned. Finished L/U/V spans: (1217.613, 277.000, 18.256) mm.

Saved datum XYZ (-1.587, -36.000, 0.000). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.000, 1.000); (0.000, -1.000, 0.000). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

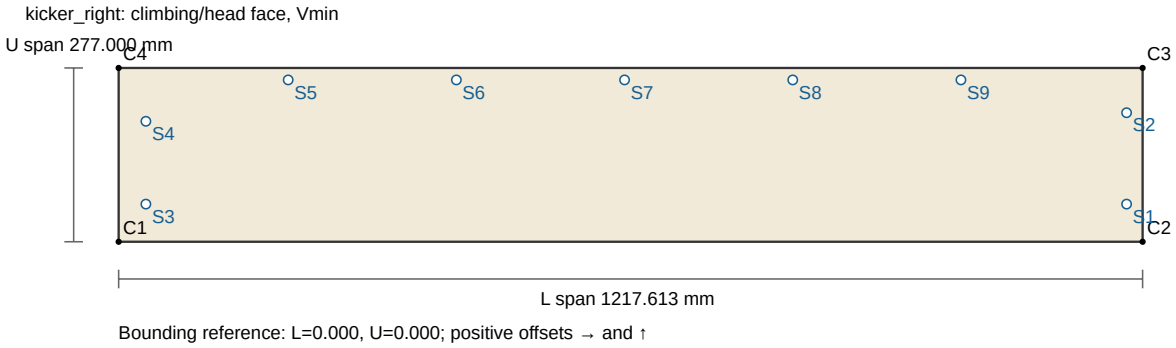

Corner stations C1 (0.000, 0.000); C2 (1217.613, 0.000); C3 (1217.613, 277.000); C4 (0.000, 277.000)

Physical climbing/screwhead face: Vmin=-18.256; timber/backing face: Vmax=0.000. S labels use front-face projection along each existing screw axis, never mirrored. Front/back L/U centers coincide for these normal axes.

S	Current screw ID	Receiver	Positive A/B from Lmin/Umin (mm)
1	round_kicker_right_rim_1	base_post_outer_right	(1198.562, 60.000)
2	round_kicker_right_rim_2	base_post_outer_right	(1198.562, 205.650)
3	round_kicker_right_center_1	base_post_center_right	(32.387, 60.000)
4	round_kicker_right_center_2	base_post_center_right	(32.387, 192.000)
5	kicker_header_right_1	base_header	(201.588, 257.950)
6	kicker_header_right_2	base_header	(401.587, 257.950)
7	kicker_header_right_3	base_header	(601.587, 257.950)
8	kicker_header_right_4	base_header	(801.587, 257.950)
9	kicker_header_right_5	base_header	(1001.587, 257.950)

Whole 277 mm front outline shown. Small modeled top-edge relief is not enlarged into a new cut or reconstructed from a hull. Existing end-section U/V vertices: (277.000, 0.000); (277.000, -18.000); (276.835, -18.196); (276.907, -18.256); (0.000, -18.256); (0.000, 0.000). This front view alone does not specify that tiny through-thickness edge detail.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
0 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 277.000, 0.000); (0.000, 277.000, -18.000); (0.000, 276.835, -18.196); (0.000, 276.907, -18.256); (0.000, 0.000, -18.256); (0.000, 0.000, 0.000)
7 (historical source only)	(1.000, 0.000, 0.000)	1217.612	(1217.613, 277.000, 0.000); (1217.613, 277.000, -18.000); (1217.613, 276.835, -18.196); (1217.613, 276.907, -18.256); (1217.613, 0.000, -18.256); (1217.613, 0.000, 0.000)


Source member 23; finished-BRep SHA256 8fbbf75704600e41b8dc97e0727794fa792821b80bbc4f79e6ff736edf9c2a79. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

lumber_leg_left

solid timber; quantity 1; stock 4x6; board S09. Finished L/U/V spans: (1989.026, 88.900, 139.700) mm.


Saved datum XYZ (-1308.100, 1639.946, 0.000). Positive L/U/V vectors: (0.000, -0.239, 0.971); (1.000, 0.000, 0.000); (0.000, 0.971, 0.239). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

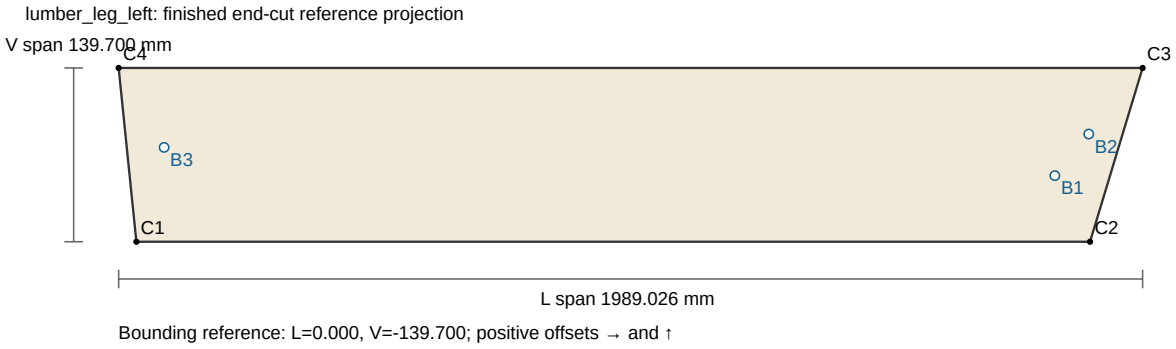

Bounding reference: L=0.000, V=-139.700; positive offsets → and ↑

Corner stations C1 (34.408, -139.700); C2 (1886.918, -139.700); C3 (1989.026, 0.000); C4 (0.000, 0.000)

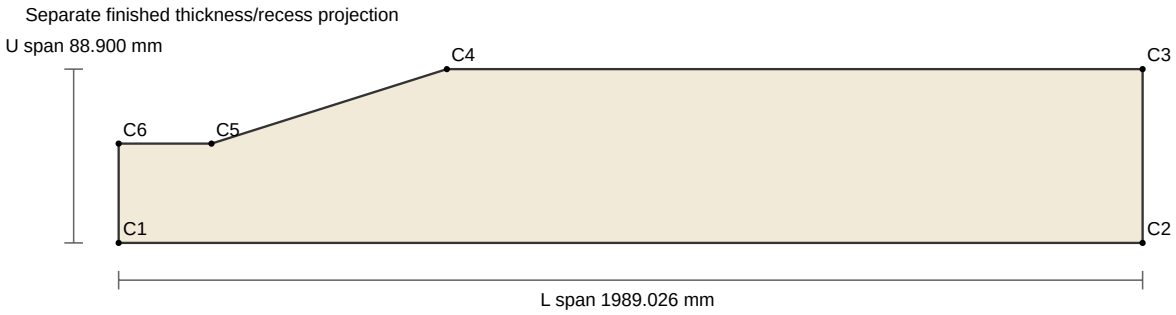

Bounding reference: L=0.000, U=0.000; positive offsets → and ↑

Corner stations C1 (0.000, 0.000); C2 (1989.026, 0.000); C3 (1989.026, 88.900); C4 (637.543, 88.900); C5 (180.343, 50.800); C6 (0.000, 50.800)

1:12 open-bottom inner-face recess: L 180.343 / U 50.800 → L 637.543 / U 88.900; runout 457.2 mm, maximum removal 38.1 mm. The cut spans V depth 139.7 mm; removal depth is not saw through-cut thickness. End bevels are shown in the L/V view.

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	lumber_leg_bolt_left_1	(1818.535, 0.000, -86.564)	(1818.535, 88.900, -86.564)	(1818.535, 53.136)
2	proposal_upper_rear_left_added_half_in	(1884.371, 0.000, -53.136)	(1884.371, 88.900, -53.136)	(1884.371, 86.564)
3	rail_rear_bolt_left_1	(88.269, 0.000, -63.864)	(88.269, 50.800, -63.864)	(88.269, 75.836)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
0 (historical source only)	(-0.971, 0.000, -0.239)	0.000	(34.408, 0.000, -139.700); (0.000, 0.000, 0.000); (0.000, 50.800, 0.000); (34.408, 50.800, -139.700)
5 (historical source only)	(0.807, 0.000, -0.590)	1605.813	(1886.918, 88.900, -139.700); (1989.026, 88.900, 0.000); (1989.026, 0.000, 0.000); (1886.918, 0.000, -139.700)
9 (historical source only)	(-0.083, 0.997, 0.000)	35.648	(637.543, 88.900, 0.000); (180.343, 50.800, 0.000); (637.543, 88.900, -139.700); (180.343, 50.800, -139.700)


Source member 24; finished-BRep SHA256 0ed21c58eac9f3c498ef5d4e21c201206d1c11032cb187b3a0d793ab8c9a121a. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

lumber_leg_right


solid timber; quantity 1; stock 4x6; board S10. Finished L/U/V spans: (1989.026, 88.900, 139.700) mm.

Saved datum XYZ (1216.025, 1639.946, 0.000). Positive L/U/V vectors: (0.000, -0.239, 0.971); (1.000, 0.000, 0.000); (0.000, 0.971, 0.239). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

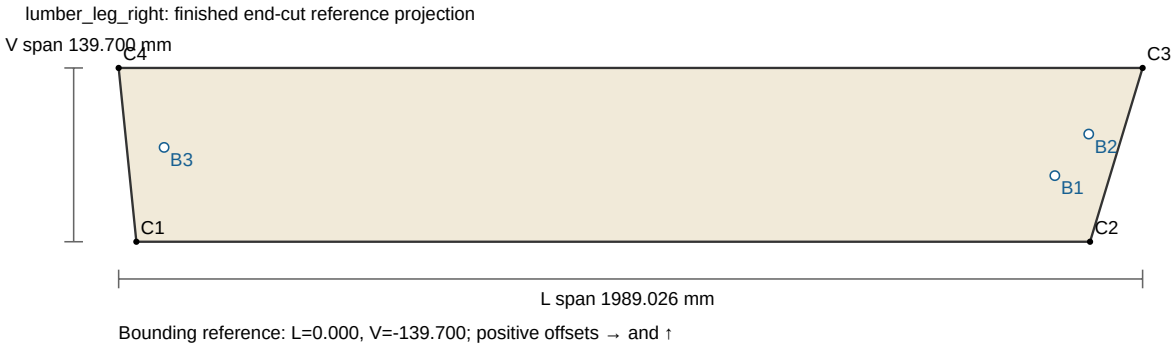

Corner stations C1 (34.408, -139.700); C2 (1886.918, -139.700); C3 (1989.026, 0.000); C4 (0.000, 0.000)

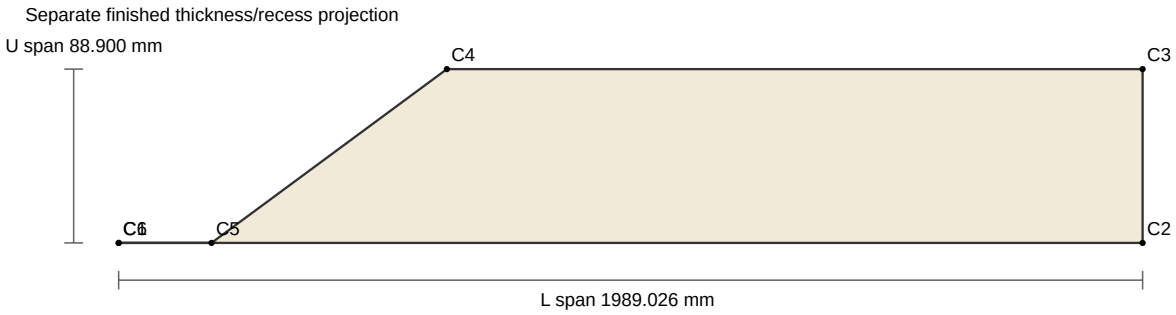

Corner stations C1 (0.000, 0.000); C2 (1989.026, 0.000); C3 (1989.026, 88.900); C4 (637.543, 88.900); C5 (180.343, 0.000); C6 (0.000, 0.000)

1:12 open-bottom inner-face recess: L 180.343 / U 0.000 → L 637.543 / U 88.900; runout 457.2 mm, maximum removal 38.1 mm. The cut spans V depth 139.7 mm; removal depth is not saw through-cut thickness. End bevels are shown in the L/V view.

B	Current bolt axis	A entry L/U/V (mm)	B exit L/U/V (mm)	Positive projected entry offsets (mm)
1	lumber_leg_bolt_right_1	(1818.535, 88.900, -86.564)	(1818.535, 0.000, -86.564)	(1818.535, 53.136)
2	proposal_upper_rear_right_added_half_in	(1884.371, 88.900, -53.136)	(1884.371, 0.000, -53.136)	(1884.371, 86.564)
3	rail_rear_bolt_right_1	(88.269, 88.900, -63.864)	(88.269, 38.100, -63.864)	(88.269, 75.836)

Entry/exit follow increasing saved shaft parameter; they are not two independent drilling targets or a selected approach side. Current fitting registration, actual finished lands and a supported clamped transfer govern. Blue marks are axis references, not bore diameters, drill bits or bushing sizes.

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
0 (historical source only)	(-0.971, 0.000, -0.239)	0.000	(0.000, 38.100, 0.000); (34.408, 38.100, -139.700); (0.000, 88.900, 0.000); (34.408, 88.900, -139.700)
5 (historical source only)	(-0.083, -0.997, 0.000)	-52.945	(637.543, 0.000, 0.000); (180.343, 38.100, 0.000); (637.543, 0.000, -139.700); (180.343, 38.100, -139.700)
8 (historical source only)	(0.807, 0.000, -0.590)	1605.813	(1886.918, 88.900, -139.700); (1989.026, 88.900, 0.000); (1989.026, 0.000, 0.000); (1886.918, 0.000, -139.700)


Source member 25; finished-BRep SHA256 3ef8a777f1e268d03c2e8b38423e0bfcbe0f3e2e64c1dd14efdadc40f6adb68f. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

main_lower_left

face panel/kicker; quantity 1; stock existing face panel; board plywood piece; no sheet nesting assigned. Finished L/U/V spans: (1217.612, 1219.200, 18.256) mm.

Saved datum XYZ (-1219.200, -31.789, 288.570). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.643, 0.766); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

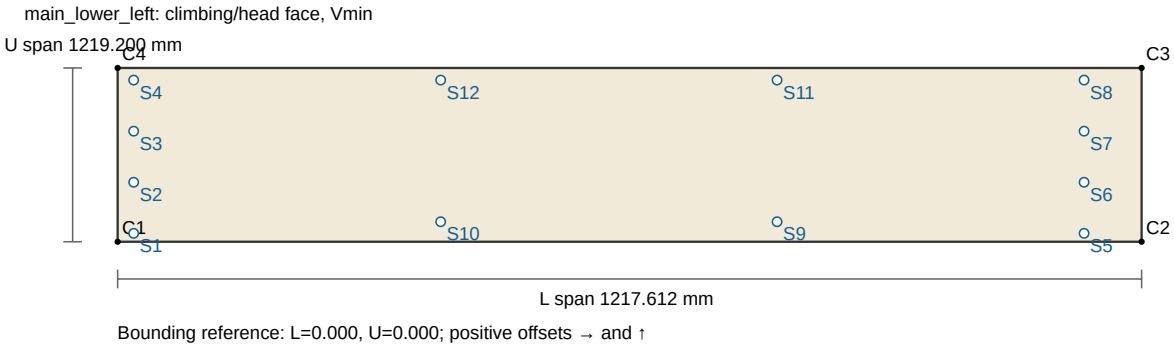

Corner stations C1 (0.000, 0.000); C2 (1217.612, 0.000); C3 (1217.612, 1219.200); C4 (0.000, 1219.200)

Physical climbing/screwhead face: Vmin=-18.256; timber/backing face: Vmax=0.000. S labels use front-face projection along each existing screw axis, never mirrored. Front/back L/U centers coincide for these normal axes.

S	Current screw ID	Receiver	Positive A/B from Lmin/Umin (mm)
1	round_panel_lower_left_rim_1	base_side_left	(19.050, 59.050)
2	round_panel_lower_left_rim_2	base_side_left	(19.050, 417.433)
3	round_panel_lower_left_rim_3	base_side_left	(19.050, 775.817)
4	round_panel_lower_left_rim_4	base_side_left	(19.050, 1134.200)
5	round_panel_lower_left_center_1	base_principal_center_left	(1149.200, 59.050)
6	round_panel_lower_left_center_2	base_principal_center_left	(1149.200, 417.433)
7	round_panel_lower_left_center_3	base_principal_center_left	(1149.200, 775.817)
8	round_panel_lower_left_center_4	base_principal_center_left	(1149.200, 1134.200)
9	round_panel_lower_left_edge_1	base_rail_bottom_left	(784.125, 140.475)
10	round_panel_lower_left_edge_2	base_rail_bottom_left	(384.125, 140.475)
11	round_panel_lower_left_service_1	base_rail_service_lower_left	(784.125, 1134.200)
12	round_panel_lower_left_service_2	base_rail_service_lower_left	(384.125, 1134.200)

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 1219.200, -18.256); (0.000, 1219.200, 0.000); (0.000, 0.000, -18.256); (0.000, 0.000, 0.000)
2 (historical source only)	(1.000, 0.000, 0.000)	1217.612	(1217.612, 1219.200, -18.256); (1217.612, 1219.200, 0.000); (1217.612, 0.000, -18.256); (1217.612, 0.000, 0.000)


Source member 26; finished-BRep SHA256 3c0833f43a3ac721db0c7e7c476ac56e7b560b3a4fd9f0883ca38a7932b4ee0f. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

main_lower_right

face panel/kicker; quantity 1; stock existing face panel; board plywood piece; no sheet nesting assigned. Finished L/U/V spans: (1217.613, 1219.200, 18.256) mm.

Saved datum XYZ (-1.587, -31.789, 288.570). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.643, 0.766); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

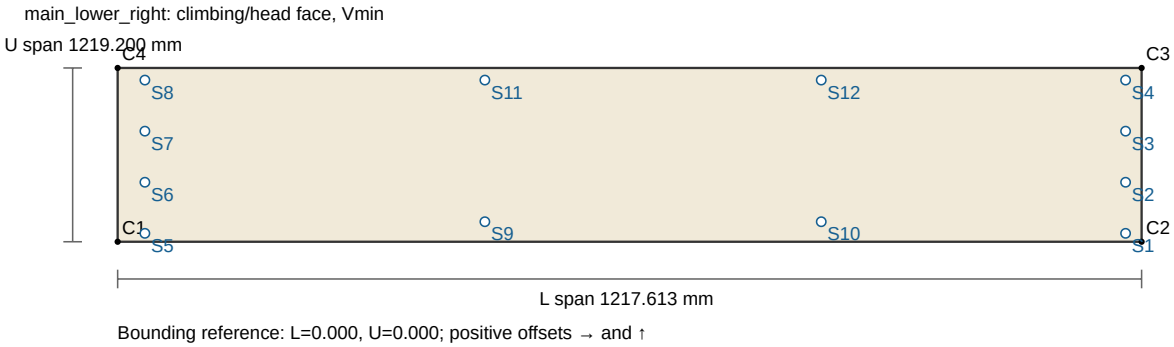

Corner stations C1 (0.000, 0.000); C2 (1217.613, 0.000); C3 (1217.613, 1219.200); C4 (0.000, 1219.200)

Physical climbing/screwhead face: Vmin=-18.256; timber/backing face: Vmax=0.000. S labels use front-face projection along each existing screw axis, never mirrored. Front/back L/U centers coincide for these normal axes.

S	Current screw ID	Receiver	Positive A/B from Lmin/Umin (mm)
1	round_panel_lower_right_rim_1	base_side_right	(1198.562, 59.050)
2	round_panel_lower_right_rim_2	base_side_right	(1198.562, 417.433)
3	round_panel_lower_right_rim_3	base_side_right	(1198.562, 775.817)
4	round_panel_lower_right_rim_4	base_side_right	(1198.562, 1134.200)
5	round_panel_lower_right_center_1	base_principal_center_right	(32.387, 59.050)
6	round_panel_lower_right_center_2	base_principal_center_right	(32.387, 417.433)
7	round_panel_lower_right_center_3	base_principal_center_right	(32.387, 775.817)
8	round_panel_lower_right_center_4	base_principal_center_right	(32.387, 1134.200)
9	round_panel_lower_right_edge_1	base_rail_bottom_right	(436.662, 140.475)
10	round_panel_lower_right_edge_2	base_rail_bottom_right	(836.663, 140.475)
11	round_panel_lower_right_service_1	base_rail_service_lower_right	(436.662, 1134.200)
12	round_panel_lower_right_service_2	base_rail_service_lower_right	(836.663, 1134.200)

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 1219.200, -18.256); (0.000, 1219.200, 0.000); (0.000, 0.000, -18.256); (0.000, 0.000, 0.000)
2 (historical source only)	(1.000, 0.000, 0.000)	1217.612	(1217.613, 1219.200, -18.256); (1217.613, 1219.200, 0.000); (1217.613, 0.000, -18.256); (1217.613, 0.000, 0.000)


Source member 27; finished-BRep SHA256 4bb66b1a059fd5fe61a6abde424eced9c8513ce60bc28c3052316c8a9e8cdb0c. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

main_upper_left

face panel/kicker; quantity 1; stock existing face panel; board plywood piece; no sheet nesting assigned. Finished L/U/V spans: (1217.612, 1219.200, 18.256) mm.

Saved datum XYZ (-1219.200, 751.898, 1222.532). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.643, 0.766); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

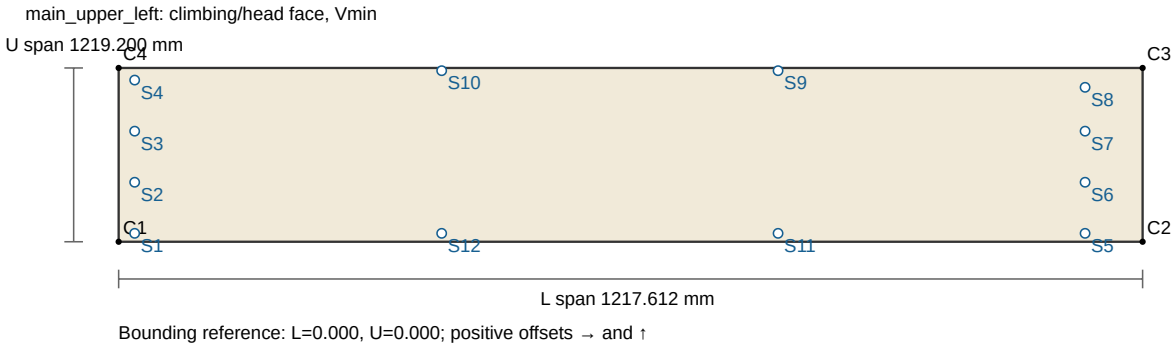

Corner stations C1 (0.000, 0.000); C2 (1217.612, 0.000); C3 (1217.612, 1219.200); C4 (0.000, 1219.200)

Physical climbing/screwhead face: Vmin=-18.256; timber/backing face: Vmax=0.000. S labels use front-face projection along each existing screw axis, never mirrored. Front/back L/U centers coincide for these normal axes.

S	Current screw ID	Receiver	Positive A/B from Lmin/Umin (mm)
1	round_panel_upper_left_rim_1	base_side_left	(19.050, 59.050)
2	round_panel_upper_left_rim_2	base_side_left	(19.050, 417.433)
3	round_panel_upper_left_rim_3	base_side_left	(19.050, 775.817)
4	round_panel_upper_left_rim_4	base_side_left	(19.050, 1134.200)
5	round_panel_upper_left_center_1	base_principal_center_left	(1149.200, 59.050)
6	round_panel_upper_left_center_2	base_principal_center_left	(1149.200, 417.433)
7	round_panel_upper_left_center_3	base_principal_center_left	(1149.200, 775.817)
8	round_panel_upper_left_center_4	base_principal_center_left	(1149.200, 1083.400)
9	round_panel_upper_left_edge_1	base_rail_top	(784.125, 1200.150)
10	round_panel_upper_left_edge_2	base_rail_top	(384.125, 1200.150)
11	round_panel_upper_left_service_1	base_rail_service_upper_left	(784.125, 59.050)
12	round_panel_upper_left_service_2	base_rail_service_upper_left	(384.125, 59.050)

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 1219.200, -18.256); (0.000, 1219.200, 0.000); (0.000, 0.000, -18.256); (0.000, 0.000, 0.000)
2 (historical source only)	(1.000, 0.000, 0.000)	1217.612	(1217.612, 1219.200, -18.256); (1217.612, 1219.200, 0.000); (1217.612, 0.000, -18.256); (1217.612, 0.000, 0.000)


Source member 28; finished-BRep SHA256 d904e4794a64466b72500b8c9bb82a49d90eef118cdbaa526c6b07de23bd9422. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

main_upper_right

face panel/kicker; quantity 1; stock existing face panel; board plywood piece; no sheet nesting assigned. Finished L/U/V spans: (1217.613, 1219.200, 18.256) mm.

Saved datum XYZ (-1.587, 751.898, 1222.532). Positive L/U/V vectors: (1.000, 0.000, 0.000); (0.000, 0.643, 0.766); (0.000, -0.766, 0.643). L is the saved grain/reference direction.

The drawing reference is the positive-offset finished bounding corner, not necessarily a material corner. A beveled-end saved datum can be virtual. Use the numbered material corner stations to identify the part; do not mirror left/right.

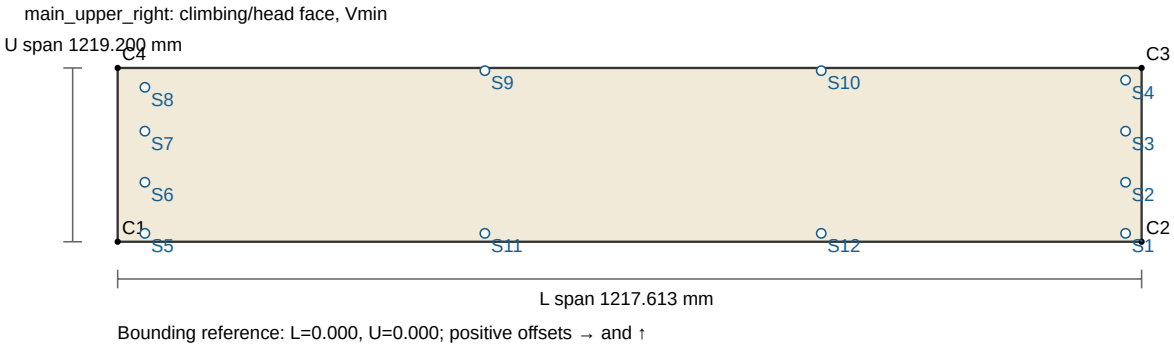

Corner stations C1 (0.000, 0.000); C2 (1217.613, 0.000); C3 (1217.613, 1219.200); C4 (0.000, 1219.200)

Physical climbing/screwhead face: Vmin=-18.256; timber/backing face: Vmax=0.000. S labels use front-face projection along each existing screw axis, never mirrored. Front/back L/U centers coincide for these normal axes.

S	Current screw ID	Receiver	Positive A/B from Lmin/Umin (mm)
1	round_panel_upper_right_rim_1	base_side_right	(1198.562, 59.050)
2	round_panel_upper_right_rim_2	base_side_right	(1198.562, 417.433)
3	round_panel_upper_right_rim_3	base_side_right	(1198.562, 775.817)
4	round_panel_upper_right_rim_4	base_side_right	(1198.562, 1134.200)
5	round_panel_upper_right_center_1	base_principal_center_right	(32.387, 59.050)
6	round_panel_upper_right_center_2	base_principal_center_right	(32.387, 417.433)
7	round_panel_upper_right_center_3	base_principal_center_right	(32.387, 775.817)
8	round_panel_upper_right_center_4	base_principal_center_right	(32.387, 1083.400)
9	round_panel_upper_right_edge_1	base_rail_top	(436.662, 1200.150)
10	round_panel_upper_right_edge_2	base_rail_top	(836.663, 1200.150)
11	round_panel_upper_right_service_1	base_rail_service_upper_right	(436.662, 59.050)
12	round_panel_upper_right_service_2	base_rail_service_upper_right	(836.663, 59.050)

Saved cut-face ref	Outward normal L/U/V	Offset n·(L,U,V)=offset (mm)	Boundary L/U/V stations (mm)
1 (historical source only)	(-1.000, 0.000, 0.000)	0.000	(0.000, 1219.200, -18.256); (0.000, 1219.200, 0.000); (0.000, 0.000, -18.256); (0.000, 0.000, 0.000)
2 (historical source only)	(1.000, 0.000, 0.000)	1217.612	(1217.613, 1219.200, -18.256); (1217.613, 1219.200, 0.000); (1217.613, 0.000, -18.256); (1217.613, 0.000, 0.000)

Source member 29; finished-BRep SHA256 15df0dac871ff731437101d101ee60d4814829c3ea380f83f1b4765e8c7614b5. Face numbering locates that source only. Out-of-projection cut faces remain listed above. No hole, recess or service feature may be inferred absent from an end-face subset.

Hold and LED opening schedule

Front/climbing-face measurements; retain each panel’s TOP/DOWN or BOTTOM/UP datum. These274 openings are separate from the66 panel/kicker attachment screws. The current panel widths and fixed world-grid centers govern.

main_lower_left

1217.6125 × 1219.2 mm; datum TOP / DOWN. Offsets are from the front-view left and the stated datum edge.

label	kind	diameter mm	from left mm	from datum edge mm	layout note
A1	T-nut	11.1125	200	1120	
A2	T-nut	11.1125	200	920	
A3	T-nut	11.1125	200	720	
A4	T-nut	11.1125	200	520	
A5	T-nut	11.1125	200	320	
A6	T-nut	11.1125	200	120	
B1	T-nut	11.1125	400	1120	
B2	T-nut	11.1125	400	920	
B3	T-nut	11.1125	400	720	
B4	T-nut	11.1125	400	520	
B5	T-nut	11.1125	400	320	
B6	T-nut	11.1125	400	120	
C1	T-nut	11.1125	600	1120	
C2	T-nut	11.1125	600	920	
C3	T-nut	11.1125	600	720	
C4	T-nut	11.1125	600	520	
C5	T-nut	11.1125	600	320	
C6	T-nut	11.1125	600	120	
D1	T-nut	11.1125	800	1120	
D2	T-nut	11.1125	800	920	
D3	T-nut	11.1125	800	720	
D4	T-nut	11.1125	800	520	
D5	T-nut	11.1125	800	320	
D6	T-nut	11.1125	800	120	
E1	T-nut	11.1125	1000	1120	
E2	T-nut	11.1125	1000	920	
E3	T-nut	11.1125	1000	720	
E4	T-nut	11.1125	1000	520	
E5	T-nut	11.1125	1000	320	
E6	T-nut	11.1125	1000	120	
F1	T-nut	11.1125	1200	1120	
F2	T-nut	11.1125	1200	920	
F3	T-nut	11.1125	1200	720	
F4	T-nut	11.1125	1200	520	
F5	T-nut	11.1125	1200	320	
F6	T-nut	11.1125	1200	120	
A1	LED	13	200	1200	
A2	LED	13	200	1020	
A3	LED	13	200	820	
A4	LED	13	200	620	
A5	LED	13	200	420	

label	kind	diameter mm	from left mm	from datum edge mm	layout note
A6	LED	13	200	220	
A7	LED	13	200	20	
B1	LED	13	400	1200	
B2	LED	13	400	1020	
B3	LED	13	400	820	
B4	LED	13	400	620	
B5	LED	13	400	420	
B6	LED	13	400	220	
B7	LED	13	400	20	
C1	LED	13	600	1200	
C2	LED	13	600	1020	
C3	LED	13	600	820	
C4	LED	13	600	620	
C5	LED	13	600	420	
C6	LED	13	600	220	
C7	LED	13	600	20	
D1	LED	13	800	1200	
D2	LED	13	800	1020	
D3	LED	13	800	820	
D4	LED	13	800	620	
D5	LED	13	800	420	
D6	LED	13	800	220	
D7	LED	13	800	20	
E1	LED	13	1000	1200	
E2	LED	13	1000	1020	
E3	LED	13	1000	820	
E4	LED	13	1000	620	
E5	LED	13	1000	420	
E6	LED	13	1000	220	
E7	LED	13	1000	20	
F1	LED	13	1200	1200	
F2	LED	13	1200	1020	
F3	LED	13	1200	820	
F4	LED	13	1200	620	
F5	LED	13	1200	420	
F6	LED	13	1200	220	
F7	LED	13	1200	20	

main_lower_right

1217.6125 × 1219.2 mm; datum TOP / DOWN. Offsets are from the front-view left and the stated datum edge.

label	kind	diameter mm	from left mm	from datum edge mm	layout note
G1	T-nut	11.1125	182.3875	1120	
G2	T-nut	11.1125	182.3875	920	
G3	T-nut	11.1125	182.3875	720	
G4	T-nut	11.1125	182.3875	520	
G5	T-nut	11.1125	182.3875	320	
G6	T-nut	11.1125	182.3875	120	
H1	T-nut	11.1125	382.3875	1120	
H2	T-nut	11.1125	382.3875	920	

label	kind	diameter mm	from left mm	from datum edge mm	layout note
H3	T-nut	11.1125	382.3875	720	
H4	T-nut	11.1125	382.3875	520	
H5	T-nut	11.1125	382.3875	320	
H6	T-nut	11.1125	382.3875	120	
I1	T-nut	11.1125	582.3875	1120	
I2	T-nut	11.1125	582.3875	920	
I3	T-nut	11.1125	582.3875	720	
I4	T-nut	11.1125	582.3875	520	
I5	T-nut	11.1125	582.3875	320	
I6	T-nut	11.1125	582.3875	120	
J1	T-nut	11.1125	782.3875	1120	
J2	T-nut	11.1125	782.3875	920	
J3	T-nut	11.1125	782.3875	720	
J4	T-nut	11.1125	782.3875	520	
J5	T-nut	11.1125	782.3875	320	
J6	T-nut	11.1125	782.3875	120	
K1	T-nut	11.1125	982.3875	1120	
K2	T-nut	11.1125	982.3875	920	
K3	T-nut	11.1125	982.3875	720	
K4	T-nut	11.1125	982.3875	520	
K5	T-nut	11.1125	982.3875	320	
K6	T-nut	11.1125	982.3875	120	
G1	LED	13	182.3875	1200	
G2	LED	13	187.3875	1020	Existing G2 +5 mm move
G3	LED	13	182.3875	820	
G4	LED	13	182.3875	620	
G5	LED	13	182.3875	420	
G6	LED	13	182.3875	220	
G7	LED	13	182.3875	20	
H1	LED	13	382.3875	1200	
H2	LED	13	382.3875	1020	
H3	LED	13	382.3875	820	
H4	LED	13	382.3875	620	
H5	LED	13	382.3875	420	
H6	LED	13	382.3875	220	
H7	LED	13	382.3875	20	
I1	LED	13	582.3875	1200	
I2	LED	13	582.3875	1020	
I3	LED	13	582.3875	820	
I4	LED	13	582.3875	620	
I5	LED	13	582.3875	420	
I6	LED	13	582.3875	220	
I7	LED	13	582.3875	20	
J1	LED	13	782.3875	1200	
J2	LED	13	782.3875	1020	
J3	LED	13	782.3875	820	
J4	LED	13	782.3875	620	
J5	LED	13	782.3875	420	
J6	LED	13	782.3875	220	
J7	LED	13	782.3875	20	

label	kind	diameter mm	from left mm	from datum edge mm	layout note
K1	LED	13	982.3875	1200	
K2	LED	13	982.3875	1020	
K3	LED	13	982.3875	820	
K4	LED	13	982.3875	620	
K5	LED	13	982.3875	420	
K6	LED	13	982.3875	220	
K7	LED	13	982.3875	20	

main_upper_left

1217.6125 × 1219.2 mm; datum BOTTOM / UP. Offsets are from the front-view left and the stated datum edge.

label	kind	diameter mm	from left mm	from datum edge mm	layout note
A7	T-nut	11.1125	200	100	
A8	T-nut	11.1125	200	300	
A9	T-nut	11.1125	200	500	
A10	T-nut	11.1125	200	700	
A11	T-nut	11.1125	200	900	
A12	T-nut	11.1125	200	1100	
B7	T-nut	11.1125	400	100	
B8	T-nut	11.1125	400	300	
B9	T-nut	11.1125	400	500	
B10	T-nut	11.1125	400	700	
B11	T-nut	11.1125	400	900	
B12	T-nut	11.1125	400	1100	
C7	T-nut	11.1125	600	100	
C8	T-nut	11.1125	600	300	
C9	T-nut	11.1125	600	500	
C10	T-nut	11.1125	600	700	
C11	T-nut	11.1125	600	900	
C12	T-nut	11.1125	600	1100	
D7	T-nut	11.1125	800	100	
D8	T-nut	11.1125	800	300	
D9	T-nut	11.1125	800	500	
D10	T-nut	11.1125	800	700	
D11	T-nut	11.1125	800	900	
D12	T-nut	11.1125	800	1100	
E7	T-nut	11.1125	1000	100	
E8	T-nut	11.1125	1000	300	
E9	T-nut	11.1125	1000	500	
E10	T-nut	11.1125	1000	700	
E11	T-nut	11.1125	1000	900	
E12	T-nut	11.1125	1000	1100	
F7	T-nut	11.1125	1200	100	
F8	T-nut	11.1125	1200	300	
F9	T-nut	11.1125	1200	500	
F10	T-nut	11.1125	1200	700	
F11	T-nut	11.1125	1200	900	
F12	T-nut	11.1125	1200	1100	
A8	LED	13	200	200	
A9	LED	13	200	400	

label	kind	diameter mm	from left mm	from datum edge mm	layout note
A10	LED	13	200	600	
A11	LED	13	200	800	
A12	LED	13	200	1000	
B8	LED	13	400	200	
B9	LED	13	400	400	
B10	LED	13	400	600	
B11	LED	13	400	800	
B12	LED	13	400	1000	
C8	LED	13	600	200	
C9	LED	13	600	400	
C10	LED	13	600	600	
C11	LED	13	600	800	
C12	LED	13	600	1000	
D8	LED	13	800	200	
D9	LED	13	800	400	
D10	LED	13	800	600	
D11	LED	13	800	800	
D12	LED	13	800	1000	
E8	LED	13	1000	200	
E9	LED	13	1000	400	
E10	LED	13	1000	600	
E11	LED	13	1000	800	
E12	LED	13	1000	1000	
F8	LED	13	1200	200	
F9	LED	13	1200	400	
F10	LED	13	1200	600	
F11	LED	13	1200	800	
F12	LED	13	1200	1000	

main_upper_right

1217.6125 × 1219.2 mm; datum BOTTOM / UP. Offsets are from the front-view left and the stated datum edge.

label	kind	diameter mm	from left mm	from datum edge mm	layout note
G7	T-nut	11.1125	182.3875	100	
G8	T-nut	11.1125	182.3875	300	
G9	T-nut	11.1125	182.3875	500	
G10	T-nut	11.1125	182.3875	700	
G11	T-nut	11.1125	182.3875	900	
G12	T-nut	11.1125	182.3875	1100	
H7	T-nut	11.1125	382.3875	100	
H8	T-nut	11.1125	382.3875	300	
H9	T-nut	11.1125	382.3875	500	
H10	T-nut	11.1125	382.3875	700	
H11	T-nut	11.1125	382.3875	900	
H12	T-nut	11.1125	382.3875	1100	
I7	T-nut	11.1125	582.3875	100	
I8	T-nut	11.1125	582.3875	300	
I9	T-nut	11.1125	582.3875	500	
I10	T-nut	11.1125	582.3875	700	
I11	T-nut	11.1125	582.3875	900	

label	kind	diameter mm	from left mm	from datum edge mm	layout note
I12	T-nut	11.1125	582.3875	1100	
J7	T-nut	11.1125	782.3875	100	
J8	T-nut	11.1125	782.3875	300	
J9	T-nut	11.1125	782.3875	500	
J10	T-nut	11.1125	782.3875	700	
J11	T-nut	11.1125	782.3875	900	
J12	T-nut	11.1125	782.3875	1100	
K7	T-nut	11.1125	982.3875	100	
K8	T-nut	11.1125	982.3875	300	
K9	T-nut	11.1125	982.3875	500	
K10	T-nut	11.1125	982.3875	700	
K11	T-nut	11.1125	982.3875	900	
K12	T-nut	11.1125	982.3875	1100	
G8	LED	13	182.3875	200	
G9	LED	13	182.3875	400	
G10	LED	13	182.3875	600	
G11	LED	13	182.3875	800	
G12	LED	13	182.3875	1000	
H8	LED	13	382.3875	200	
H9	LED	13	382.3875	400	
H10	LED	13	382.3875	600	
H11	LED	13	382.3875	800	
H12	LED	13	382.3875	1000	
I8	LED	13	582.3875	200	
I9	LED	13	582.3875	400	
I10	LED	13	582.3875	600	
I11	LED	13	582.3875	800	
I12	LED	13	582.3875	1000	
J8	LED	13	782.3875	200	
J9	LED	13	782.3875	400	
J10	LED	13	782.3875	600	
J11	LED	13	782.3875	800	
J12	LED	13	782.3875	1000	
K8	LED	13	982.3875	200	
K9	LED	13	982.3875	400	
K10	LED	13	982.3875	600	
K11	LED	13	982.3875	800	
K12	LED	13	982.3875	1000	

kicker_left

1217.6125 × 277 mm; datum TOP / DOWN. Offsets are from the front-view left and the stated datum edge.

label	kind	diameter mm	from left mm	from datum edge mm	layout note
1	T-nut	11.1125	100	75	
2	T-nut	11.1125	348.56	75	
3	T-nut	11.1125	597.12	75	
4	T-nut	11.1125	845.68	75	
5	T-nut	11.1125	1094.24	75	

kicker_right

1217.6125 × 277 mm; datum TOP / DOWN. Offsets are from the front-view left and the stated datum edge.

label	kind	diameter mm	from left mm	from datum edge mm	layout note
6	T-nut	11.1125	125.1875	75	
7	T-nut	11.1125	373.7475	75	
8	T-nut	11.1125	622.3075	75	
9	T-nut	11.1125	870.8675	75	
10	T-nut	11.1125	1119.4275	75	