

Iowa State University
Aerospace Engineering

AER E 322 Lab 8

Thin-Walled Section and Shear Center

Matthew Mehrkens, Peter Mikolitis, and Natsuki Oda

April 7, 2023

Aerospace Structures Laboratory Report
Lab 8 Thin-Walled Section and Shear Center

Section 4 Group 2

Matthew Mehrrens, Peter Mikolitis, and Natsuki Oda

AER E 322

April 7, 2023

Spring 2023

Contents

1	Pre-Lab	2
1.1	Introduction	2
1.2	Objectives	2
1.3	Hypothesis	3
2	Lab Work	4
2.1	Variables	4
2.1.1	Independent Variables	4
2.1.2	Dependent Variables	4
2.2	Work Assignments	5
2.3	Materials	5
2.4	Apparatus	6
2.5	Procedures	8
2.6	Data	8
3	Conclusion	11
3.1	Analysis	11
3.1.1	Problem 1	11
3.2	Conclusion	11
	References	11

Aerospace Structures Laboratory Report
Lab 8 Thin-Walled Section and Shear Center

Section 4 Group 2

Matthew Mehrtens, Peter Mikolitis, and Natsuki Oda

AER E 322

April 7, 2023

Spring 2023

Chapter 1

Pre-Lab

1.1. Introduction

To reduce the weight and cost of aircraft, aerospace engineers use thin-walled structures throughout aerostructures, particularly in the wings. In addition to being more weight and cost effective than traditional structures, they are generally equally strong. Unfortunately, one of the side effects of thin-walled structures is their tendency to twist under unsymmetrical loadings.

To evaluate the strength of thin-walled structures, we have to determine where the shear center is, *i.e.*, the point where applied loads bend and do not twist the structure. In this lab, we learned how to calculate the shear center and deflection of a thin-walled structure.

1.2. Objectives

Using the five provided specimens, we will apply twisting loads to thin-walled beams and make a number of measurements for each specimen. We will use the material learned in lecture and in the lecture notes to calculate the shear center of the thin-walled beams.

Aerospace Structures Laboratory Report
Lab 8 Thin-Walled Section and Shear Center

Section 4 Group 2

Matthew Mehrtens, Peter Mikolitis, and Natsuki Oda

AER E 322

April 7, 2023

Spring 2023

1.3. Hypothesis

Although our individual results from prelab varied significantly from each other, we expect the actual shear center values to at least correlate to the answers we calculated in prelab, even if they are off by a constant or a proportionate. We predict the cross sectional and the angle of opening will have a significant impact on the materials shear center and resistance or tendency to twist.

Aerospace Structures Laboratory Report
Lab 8 Thin-Walled Section and Shear Center

Section 4 Group 2

Matthew Mehrrens, Peter Mikolitis, and Natsuki Oda

AER E 322

April 7, 2023

Spring 2023

Chapter 2

Lab Work

2.1. Variables

2.1.1. Independent Variables

- Weight of mass; the applied load varied amongst the specimens
- Material of the specimen; the material of the element affects the local stiffness or strength and its tendency to twist
- Cross-section of the specimen; this variable controls the value of I which is used to derive the location of the shear center

2.1.2. Dependent Variables

- Deflection due to load; these deflections take the form of bending as observed in cantilevered beams or torsional deflections in the form of twist
- Shear center; the point about which applied loads cause bending but not torsion. The shear center is dependent on the cross-sectional layout.

Aerospace Structures Laboratory Report
Lab 8 Thin-Walled Section and Shear Center

Section 4 Group 2

Matthew Mehrrens, Peter Mikolitis, and Natsuki Oda

AER E 322

April 7, 2023

Spring 2023

2.2. Work Assignments

Refer to Table 2.1 for the distribution of work during this lab.

Table 2.1: Work assignments for AER E 322 Lab 8.

Task	Matthew	Peter	Natsuki
<i>Lab Work</i>			
Date Recording	X	X	X
Exp. Setup	X	X	X
Exp. Work	X	X	X
Exp. Clean-Up	X	X	X
<i>Report</i>			
Introduction	X		X
Objectives			X
Hypothesis	X		X
Variables		X	
Materials		X	
Apparatus		X	
Procedures		X	
Data			
Analysis	X	X	X
Conclusion	X	X	
References	X		
Appendix	X		
Revisions	X	X	
Editing	X		

2.3. Materials

- Five beam specimens as described in Table 2.2
- 100 g and 200 g mass
- Ruler
- Clamp; to secure one end of the beams

Aerospace Structures Laboratory Report
Lab 8 Thin-Walled Section and Shear Center

Section 4 Group 2

Matthew Mehrtens, Peter Mikolitis, and Natsuki Oda

AER E 322

April 7, 2023

Spring 2023

- Level

Table 2.2: Dimensions and specifications for the five different specimens.

Specimen ID	Cross section type	Height, h (inch)	Width, b (inch)	Thickness, t (inch)	Outer diameter, OD (inch)	Opening angle, $2\theta_0$ (deg)
I	Plastic C-channel	2.43	1.456	0.08	N/A	N/A
II	Metal C-channel	0.84	0.56	0.055	N/A	N/A
III	PVC circular open	N/A	N/A	0.071	1.66	3.1
IV	PVC circular open	N/A	N/A	0.071	1.66	36.3
V	PVC circular open	N/A	N/A	0.071	1.66	103.7

2.4. Apparatus

The five beams should be cantilevered with the clamp. On the free end, there is a cross beam on which the weight will be hung. Figure 2.1 shows the apparatus for the C-channel beam and Figure 2.2 shows the apparatus for the circular PVC beam.



Figure 2.1: One of the cantilevered C-channel beams from lab eight [1].

Aerospace Structures Laboratory Report
Lab 8 Thin-Walled Section and Shear Center
Section 4 Group 2

Matthew Mehrtens, Peter Mikolitis, and Natsuki Oda
April 7, 2023

AER E 322

Spring 2023

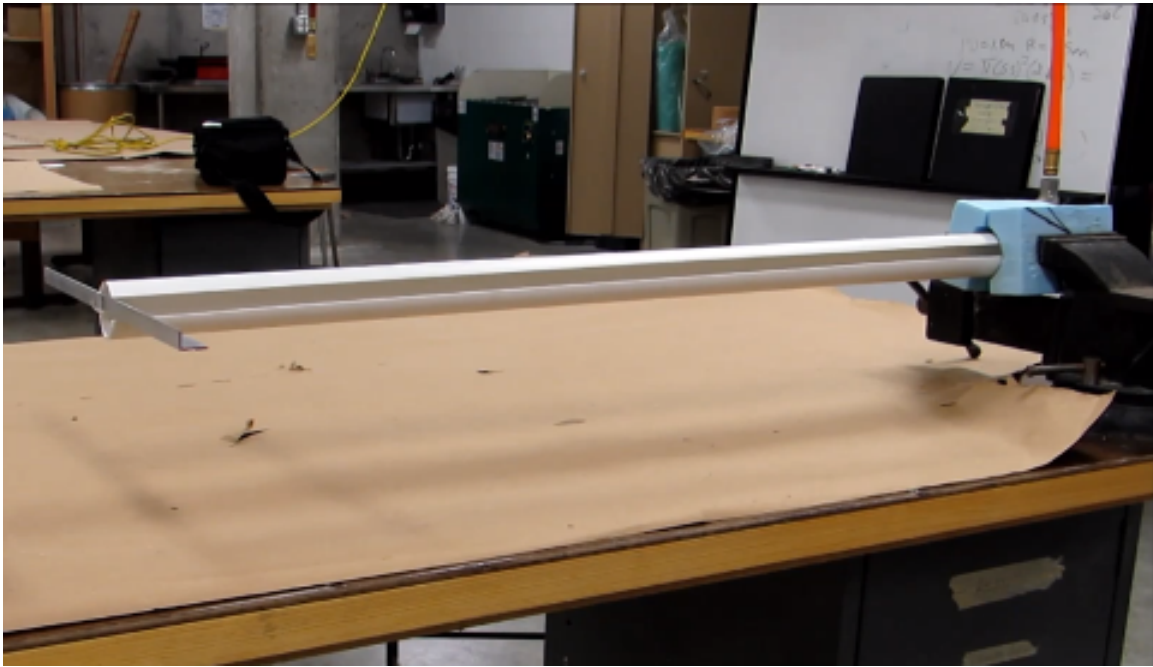


Figure 2.2: One of the cantilevered circular PVC beams from lab eight [1].

Aerospace Structures Laboratory Report
Lab 8 Thin-Walled Section and Shear Center

Section 4 Group 2

Matthew Mehrtens, Peter Mikolitis, and Natsuki Oda

AER E 322

April 7, 2023

Spring 2023

2.5. Procedures

Set up the five beams as described and shown in Section 2.4. Ensure the beams and the table are level. For specimen one, perform a preliminary measurement: measure the length from the edge of the clamp to the cross bar and measure the height from the table to a reference point at the same length as the cross bar, *e.g.*, the bottom of the beam.

For each of the five beams, perform the following procedure at least four times—placing the weight at least twice on each side of the cross beam:

1. Level the cross bar as best you can. For the circular specimens, this can be done by rotating the beam. Measure the height at both ends of the cross bar to calculate the initial angle of twist. For specimens one and two, if the initial angle of twist is greater than 1° , account for this baseline by subtracting the initial angle of twist from subsequent angle of twist calculations.
2. Place a weight on the cross beam at an arbitrary location (at least twice on both sides). Use the 100 g weight for specimens one, three, and five, and use the 200 g weight for specimens two and four.
3. Record the location of the weight along the cross bar and the height of both sides of the cross beam. Since the shear center is measured from the center of the circular beams and from the center of the vertical web of the C-beams, make sure to note where your cross beam measurements are referenced from. Later in the analysis you can adjust your cross beam measurements to be relative to the shear center.

For specimen one, put the weight at the shear center, *i.e.*, the point where an applied weight causes no twist, and measure the height at the reference point again. This should give you beam deflection.

2.6. Data

Note: Our group misinterpreted the lab instructions for this lab. Instead of measuring the height of the cross beam at both ends, we measured the height of the actual beam at both ends. The numbers we calculated in lab are, of course, meaningless. After looking through the lab instruction more closely, it is obvious we were supposed to measure the height of the cross beam to calculate the angle of twist.

Aerospace Structures Laboratory Report
Lab 8 Thin-Walled Section and Shear Center

Section 4 Group 2

Matthew Mehrtens, Peter Mikolitis, and Natsuki Oda

AER E 322

April 7, 2023

Spring 2023

To still be able to do the analysis properly, we asked a fellow group in our AER E 322 section, Section 4 Group 3, if we could use their data. They agreed; all data used in this report is courtesy of lab group 3 in AER E 322 section 4.

To calculate angle of twist, we used Equation 2.1 from the lab eight lecture notes [2]:

$$\theta = \sin^{-1} \left(\frac{h_R - h_L}{L} \right) \quad (2.1)$$

where h_R is the height from the table to the right end of the cross bar, h_L is the height from the table to the left end of the cross bar, and L is the length of the cross bar. Figure 2.3 shows this angle visually.

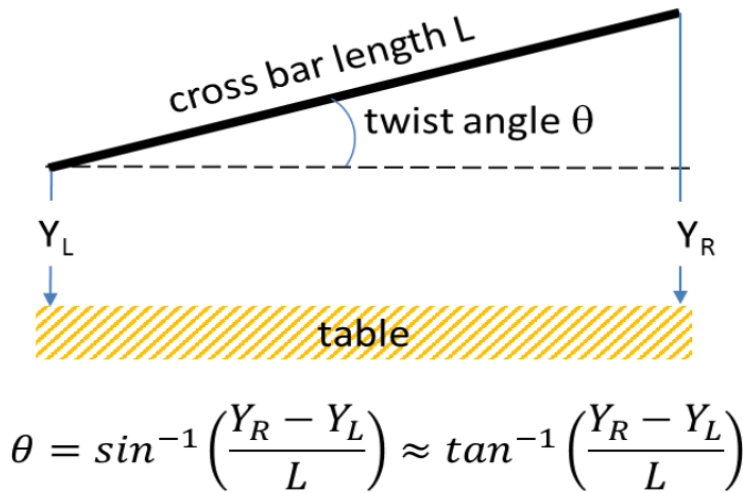


Figure 2.3: Visual representation of the angle of twist of the cross bar. [2]

The data we used in the analysis portion of this lab is shown in Table 2.3.

Aerospace Structures Laboratory Report
Lab 8 Thin-Walled Section and Shear Center

Section 4 Group 2

Matthew Mehrtens, Peter Mikolitis, and Natsuki Oda

AER E 322

April 7, 2023

Spring 2023

Table 2.3: Data collected from lab eight, courtesy of lab group 3 from AER E 322 section 4. h is the height of the cross bar at the left and right ends, L is the length of the cross bar, θ is the angle of twist, calculated using Equation 2.1, x is the distance to the weight on the cross bar, and m is the mass of the weight.

Specimen	h_L (cm)	h_R (cm)	L (cm)	θ (°)	x_L (cm)	x_R (cm)	m (g)
1	10.4	13.1	44.0	3.52	11.0	N/A	100
1	8.8	14.6	44.0	7.57	14.0	N/A	100
1	17.7	4.8	44.0	-17.0	N/A	9.2	100
1	18.7	3.4	44.0	-20.3	N/A	12.8	100
2	9.9	11.4	30.0	2.87	3.1	N/A	200
2	8.1	13.0	30.0	9.40	9.0	N/A	200
2	11.6	9.5	30.0	-4.01	N/A	3.3	200
2	12.6	8.3	30.0	-8.24	N/A	7.5	200
3	7.7	12.5	30.0	9.21	4.9	N/A	100
3	6.9	13.4	30.0	12.5	7.4	N/A	100
3	12.1	8.2	30.0	-7.47	N/A	9.8	100
3	11.5	9.1	30.0	-4.59	N/A	5.6	100
4	9.8	13.4	30.0	6.89	5.0	N/A	200
4	8.9	14.7	30.0	11.1	7.6	N/A	200
4	15.3	6.1	30.0	-17.9	N/A	7.5	200
4	14.2	7.7	30.0	-12.5	N/A	4.5	200
5	10.0	13.8	30.5	7.16	4.5	N/A	100
5	7.6	16.4	30.5	16.8	10.8	N/A	100
5	15.0	7.2	30.5	-14.8	N/A	5.6	100
5	17.2	5.8	30.5	-21.9	N/A	10.6	100

Chapter 3

Conclusion

3.1. Analysis

3.1.1. Problem 1

3.2. Conclusion

References

- [1] Thomas Chiou. *Demo Video: shear center*. 2023. URL: https://canvas.iastate.edu/courses/97229/pages/demo-video-shear-center?module_item_id=5127327.
- [2] Thomas Chiou. *Week 10 Lecture: Thin-Walled Structures and Shear Center*. 2023. URL: https://canvas.iastate.edu/courses/97229/files/21644394?module_item_id=5127295.