

11mm Size Metal Shaft Encoder EC11 Series


Detail

Model No.		EC11E15244B2	
Structure		Vertical	
Actuator configuration		Flat	
Actuator length		20mm	
Torque		10±7mN·m	
Number of detent		30	
Number of pulse		15	
Operating direction		Vertical	
Push-on switch		With	
Travel of push-on switch		1.5mm	
Operating life		15,000 cycles	
Minimum packing unit (pcs.)		1,200	
Operating temperature range		-30°C to +85°C	
Maximum operating current (Resistive load)		10mA	
Electrical performance	Ratings		10mA 5V DC
	Output signal		Output of A and B signals, proportionate to phase difference
	Insulation resistance		100MΩ min. 250V DC
	Voltage proof		300V AC for 1 minute
Mechanical performance	Push-pull strength		100N
	Resistance to soldering heat	Manual soldering	350°C max. 3s max.
		Dip soldering	260±5°C, 5±1s
Durability	Rotational life		15,000 cycles
Environmental performance	Cold		-40±3°C for 240h
	Dry heat		85±3°C for 240h
	Damp heat		60±2°C, 90 to 95%RH for 240h
Push-on switch specifications	Circuit / number of contact		Single pole and single throw (Push-on)
	Travel		1.5±0.5mm
	Operating force		4±2N
	Rotational torque		0.5A 16V DC (1mA 16V DC min. ratings)
	Contact resistance		100mΩ for initial period; 200mΩ after rotational life
	Operating life		20,000 times min.


Photo



Dimensions

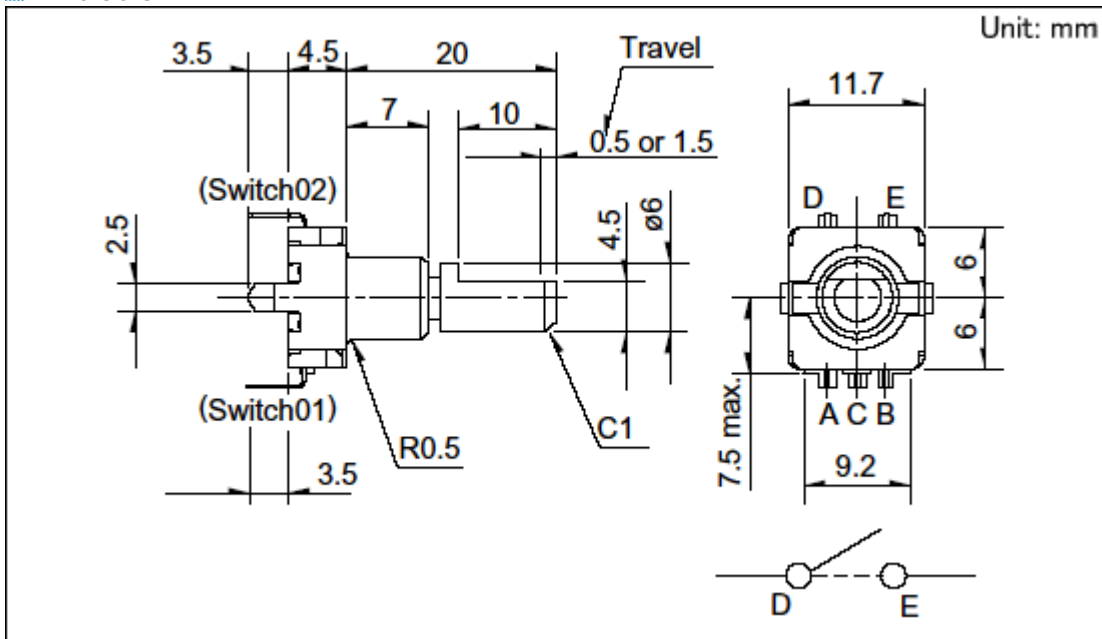


Mounting Hole Dimensions

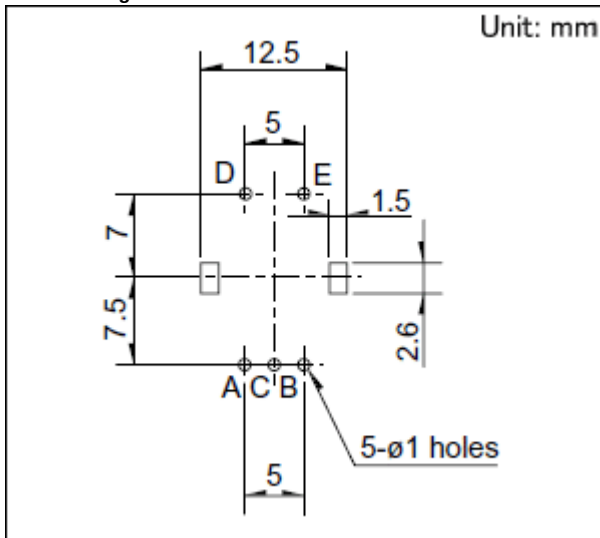


Viewed from mounting side.

Output Wave

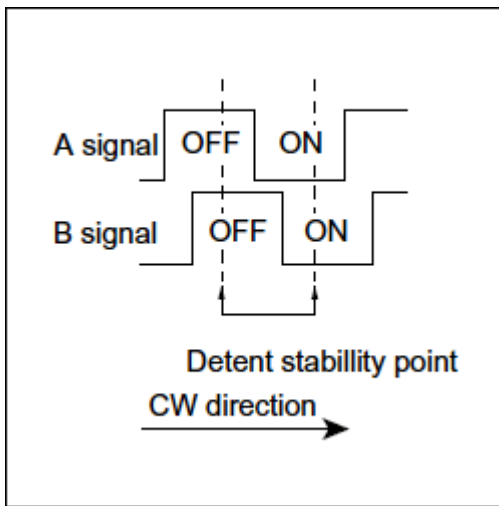

Sliding Noise

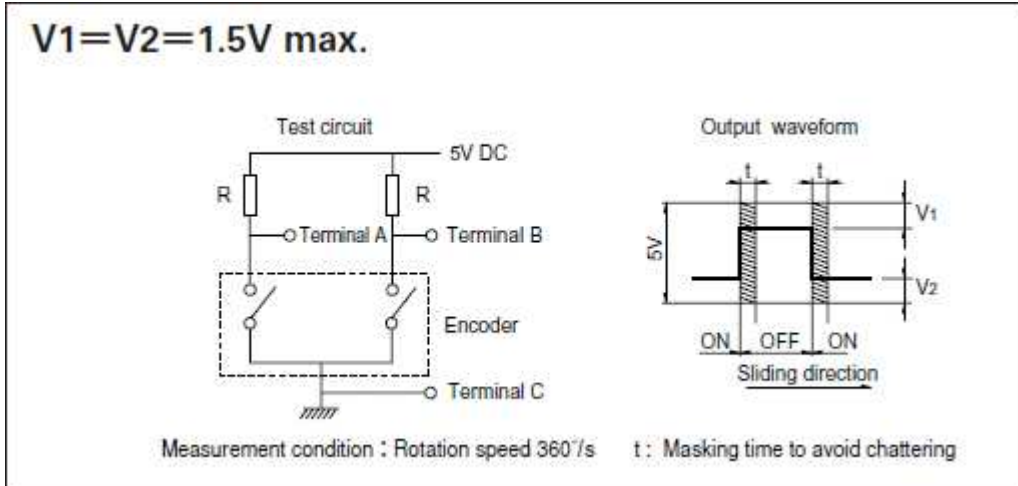


At R=5kΩ Chattering: 3ms max. Bounce: 2ms max.

Single-shaft Type

1) Knorled Type

Unit : mm

Style (SHAft diameter : $\phi 6$)

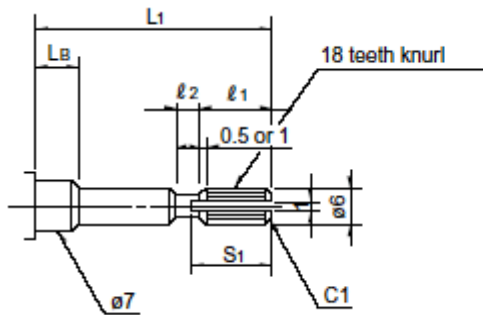


● Detailed dimensions

L ₁	L ₂	l ₁	l ₂	S ₁
20	7	6	1	7
25	7	10	2	11

2) Flat Type

Unit : mm

Style (SHAft diameter : $\phi 6$)



● Detailed dimensions


L ₁	L ₂	l
15	5	7
15	7	5 (6)
20	7	10 (12)
25	7	12

※ Does not comply with EC111

3) Slotted Type

Unit : mm

Style (SHAft diameter : $\phi 6$)



● Detailed dimensions

L ₁	L ₂
15	7
20	7
25	7

NOTE

Notes are common to this series/models.

1. Place your purchase order in N minimum package units (N: integer).
2. Ask us for the export packaging unit.
3. Products other than those listed in the above chart are also available. Please contact us for details.
4. This products can be used in vehicles.
Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.

▶ Inquiries about Products

For more information please contact: Products Information Center.

1-7, Yukigaya-otsuka-machi, Ota-ku, Tokyo, 145-8501, Japan

Phone: +81 (3) 5499-8154