


SHEET 2 - CARRIER PLATE (P/N SP-01) - 6 mm HDPE or 2.0 mm 304 SS (units mm [in])

TOP VIEW



SECTION A-A (through Y=0, looking from +X) - flanges bolt to slide drawer members

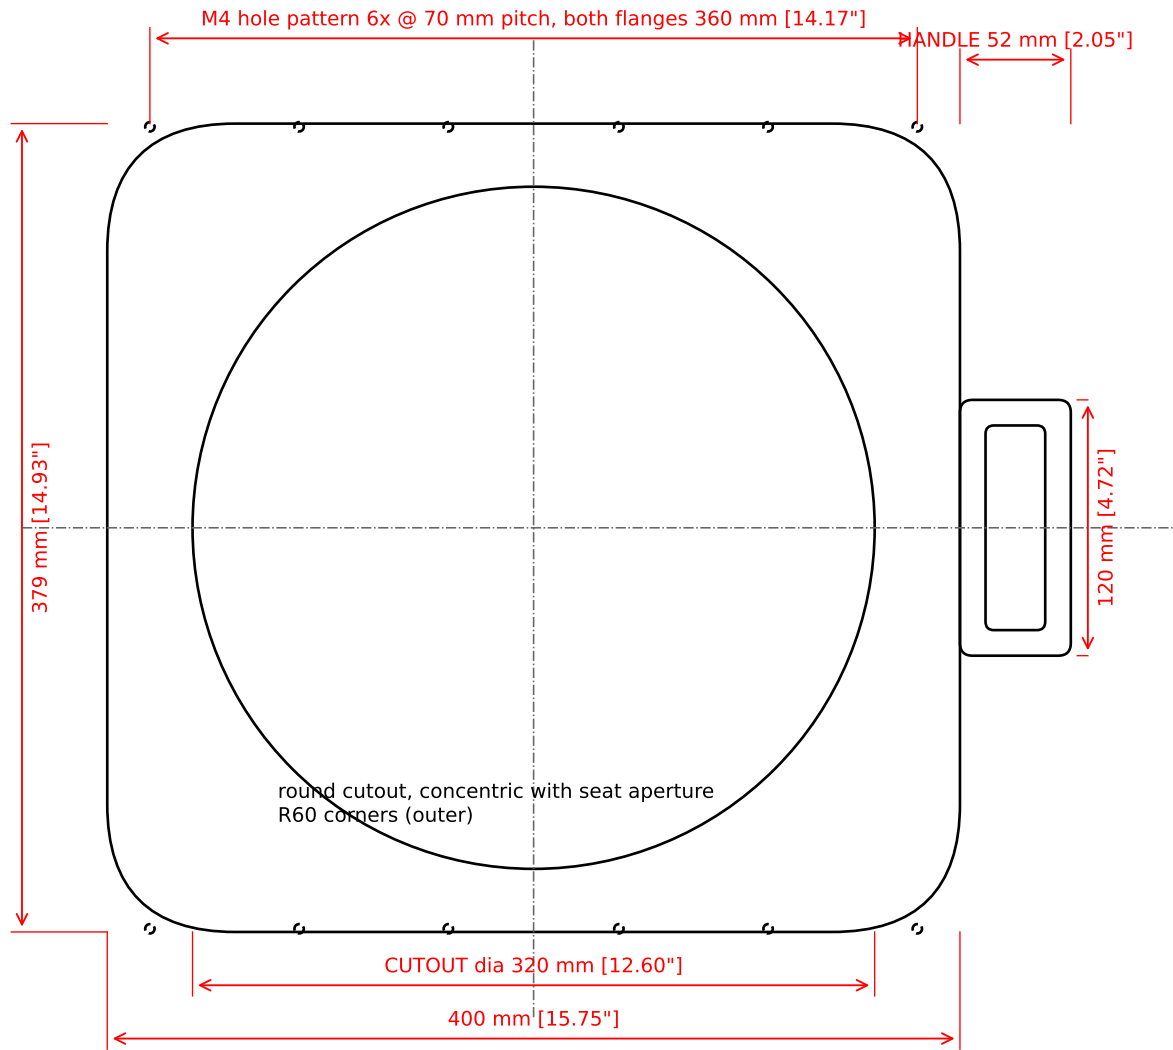

dashed: drawer slide & cross-bar tube (ref.)

NOTES

1. Material option A: 6 mm HDPE (FDA, white) - flanges are separate 3 mm SS angle riveted on. Option B: 2.0 mm 304 SS, flanges formed, edges hemmed.
2. Handle: 12 mm dia SS D-pull or moulded HDPE, 120 mm wide, 40 mm stand-off from plate edge.
3. Pan flange rests on plate around cutout - keep cutout edge smooth ( $R \geq 1$  mm) so pan can be lifted out.
4. Latch keeper (magnetic catch or spring detent) on -X end; strike on frame clamp. Bump stop at full extension.
5. Tolerance: +/-0.5 mm cutout, +/-1.0 mm outer, flatness 1.0 mm.