



SHEET 2 - CARRIER PLATE (P/N SP-01) - 6 mm HDPE or 2.0 mm 304 SS (units mm [in])

TOP VIEW (+Y = rear / pull direction, up on page)

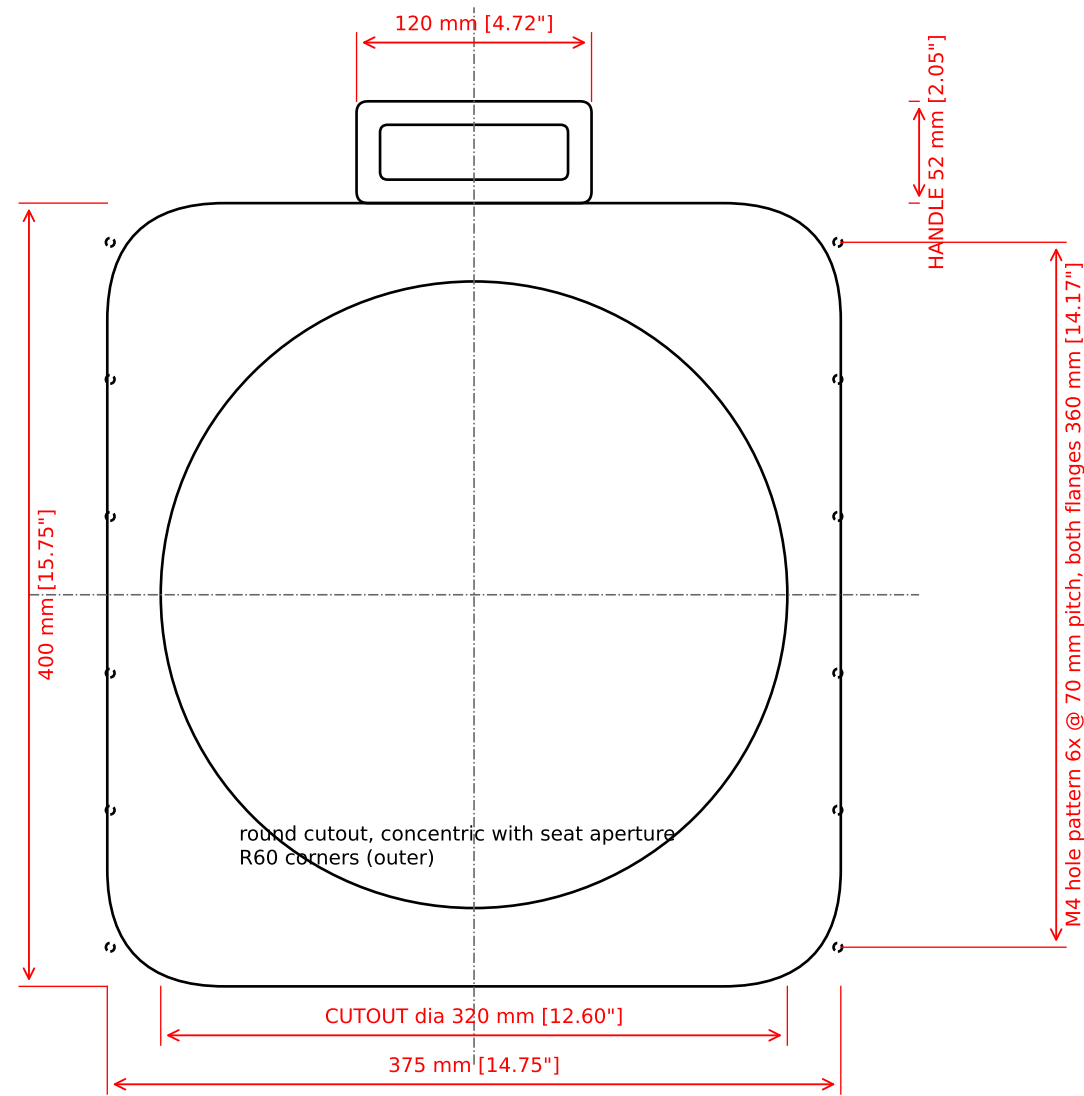

SECTION A-A (through X=0, looking from rear) - side flanges bolt to slide drawer members

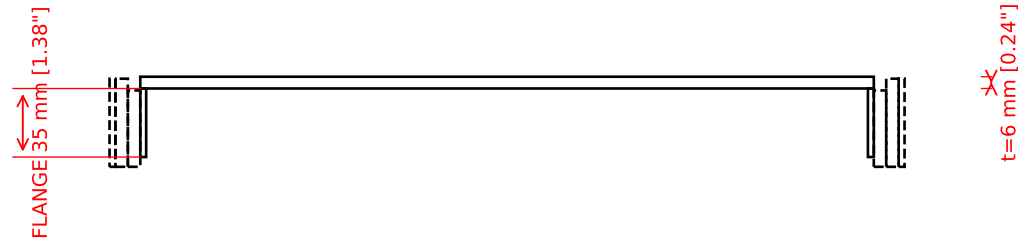

dashed: drawer slide & angle-rail web (ref.)

- NOTES
1. Material option A: 6 mm HDPE (FDA, white) - flanges are separate 3 mm SS angle riveted on. Option B: 2.0 mm 304 SS, flanges formed, edges hemmed.
 2. Handle: 12 mm dia SS D-pull or moulded HDPE, 120 mm wide, 40 mm stand-off from REAR plate edge.
 3. Pan flange rests on plate around cutout - keep cutout edge smooth ($R \geq 1$ mm) so pan can be lifted out.
 4. Latch keeper (magnetic catch or spring detent) on FRONT (-Y) end; strike on front rail clamp. Bump stop at full extension.
 5. Tolerance: ± 0.5 mm cutout, ± 1.0 mm outer, flatness 1.0 mm.