



SHEET 3 - REMOVABLE ROUND PAN (P/N SP-02)
moulded PP or 0.8 mm 304 SS drawn (units mm [in])

TOP VIEW

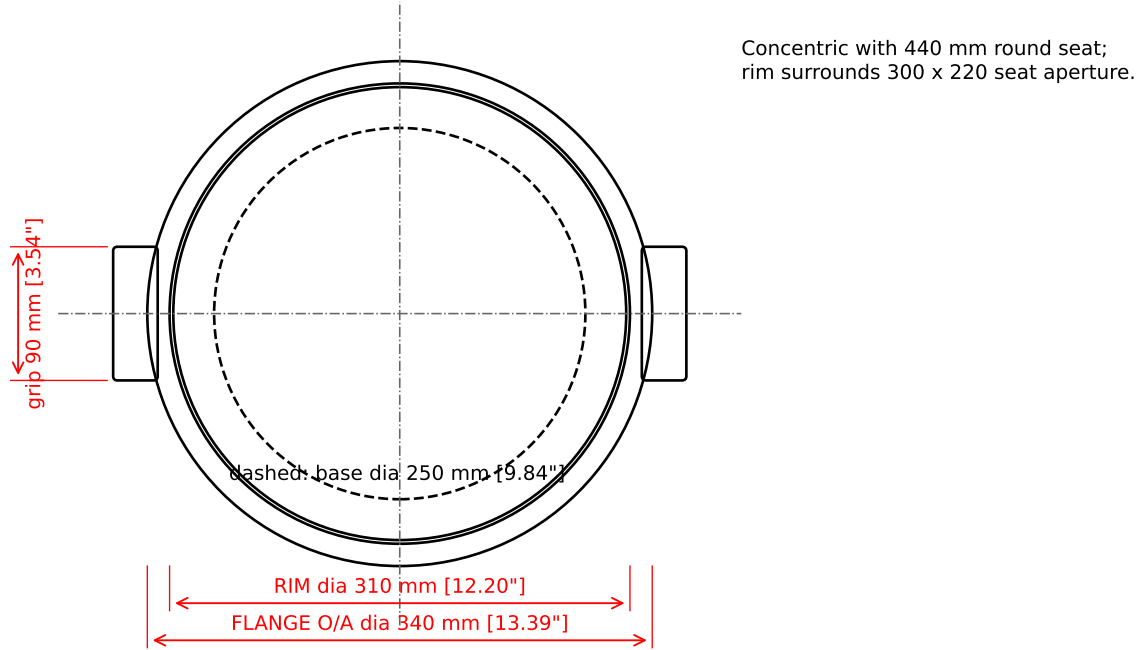

SECTION B-B (through centre)

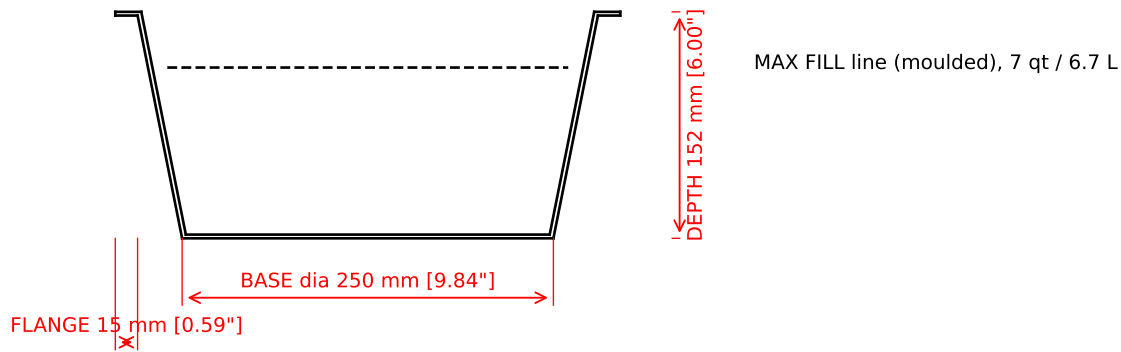

NOTES

0. Round (revolved) pan. Draft angle 11.3 deg. Wall 2.5 mm nominal. Base corner R15 inside.
1. Capacity: ~9.3 L brim-full; 7 qt (6.7 L) working capacity at moulded MAX FILL line 115 mm above base.
Concentric with the 440 mm round seat and its 300 x 220 aperture (pan rim 310 dia fully surrounds aperture).
2. Flange rests on carrier plate cutout (Sheet 2). Two moulded end grips for lift-out.
3. Supply with snap-on splash lid (P/N SP-03, same rim profile) - lid fitted once pan is extended before carrying.
4. Material: polypropylene copolymer, min. 2.5 mm wall, autoclavable / dishwasher-safe. Alt: 0.8 mm 304 SS deep-drawn, polished.
5. Tolerance +/-1.0 mm; rim must pass freely through carrier cutout (5 mm radial clearance); flange OD 340 clears carrier side flanges (369 inside).