

# HY QUICK GUIDES

## Work Zones

Quick Guides highlight relevant information to help manage common activities in accordance with HY’s processes.



**Types of work zones** - *Found on Hansen Yuncken project sites*

- Exclusion Zone- Zones that prevent access to all workers due to the nature of high risk work activities taking place.
- Restricted Work Zone- Work areas dedicated to specific activities intended to prevent others from accessing. Only workers who are performing those activities may enter the work zone, otherwise, anyone else entering must be permitted by the supervisor.




**Methods of delineation** - *Method of delineation must be fit for purpose*

- The type of delineation is to be suitable for the nature of the work. Where practicable, physical barriers should be used to delineate HRCW areas
- Delineation for work zones must be set up correctly and well maintained
- Bunting, flags, and tape may be used to increase visibility of work areas and walkways (i.e. green for walkways/accessways, red for restricted/exclusion zones)
- Delineation used for separation of people and plant may be:
  - Solid barriers e.g. concrete/water filled barriers, solid fencing etc
  - Barrier mesh/para webbing type fences
  - Flagging/bunting



**Safe means of access** - *Through and around work zones*

- Emergency access must be maintained to all work zones
- Pedestrian access is to be maintained around work zones
- If using flagging or bunting, green is to signify safe areas such as walkways, and red is to signify restricted areas

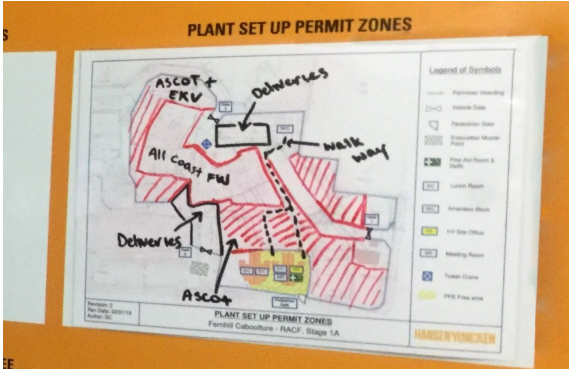

**Communicating work zones** - *identifying work zones and informing workers*

- Work zones are to be determined by consultation between HY, relevant workers, and workgroups operating in close proximity
- Signage and communication must be suitable for work being performed

