


ENGLISH

DL-AS

Premium Energy-Saving Two-Platen Direct Clamping Series

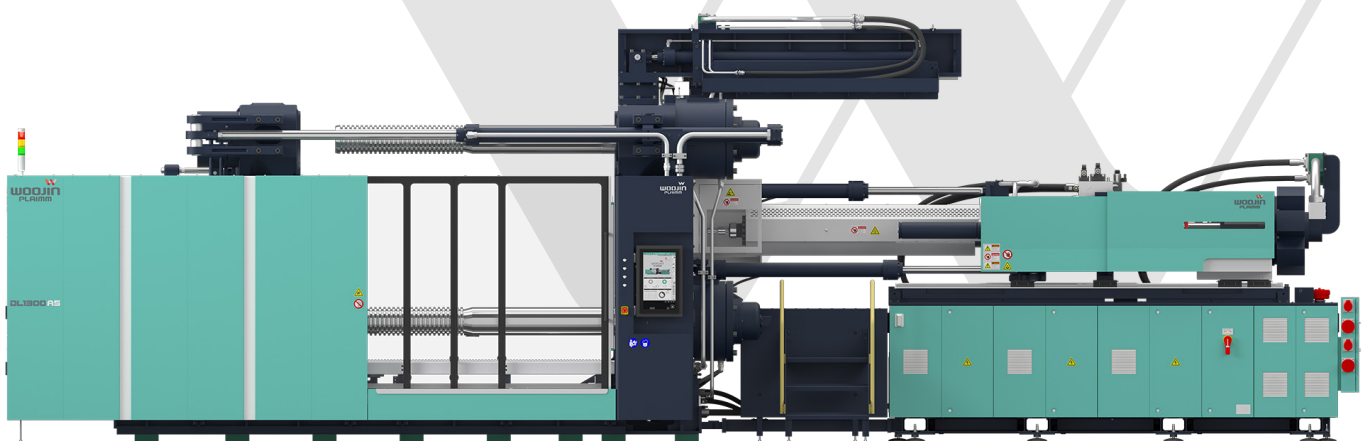

WOODJIN
PLAIMM

OVERVIEW

DL-A5

Premium Energy-Saving Two-Platen Direct Clamping Series

A fast and precise injection molding machine featuring a practical design, class-leading mold installation space, and a robust mechanism.

(Ver.1: 450~1800Ton | Ver.2: 500~4300Ton)



IMM Promotion




Hybrid System
(Servo Motor)



Faster
Cycle Time



EUROMAP 60.1
Class 8

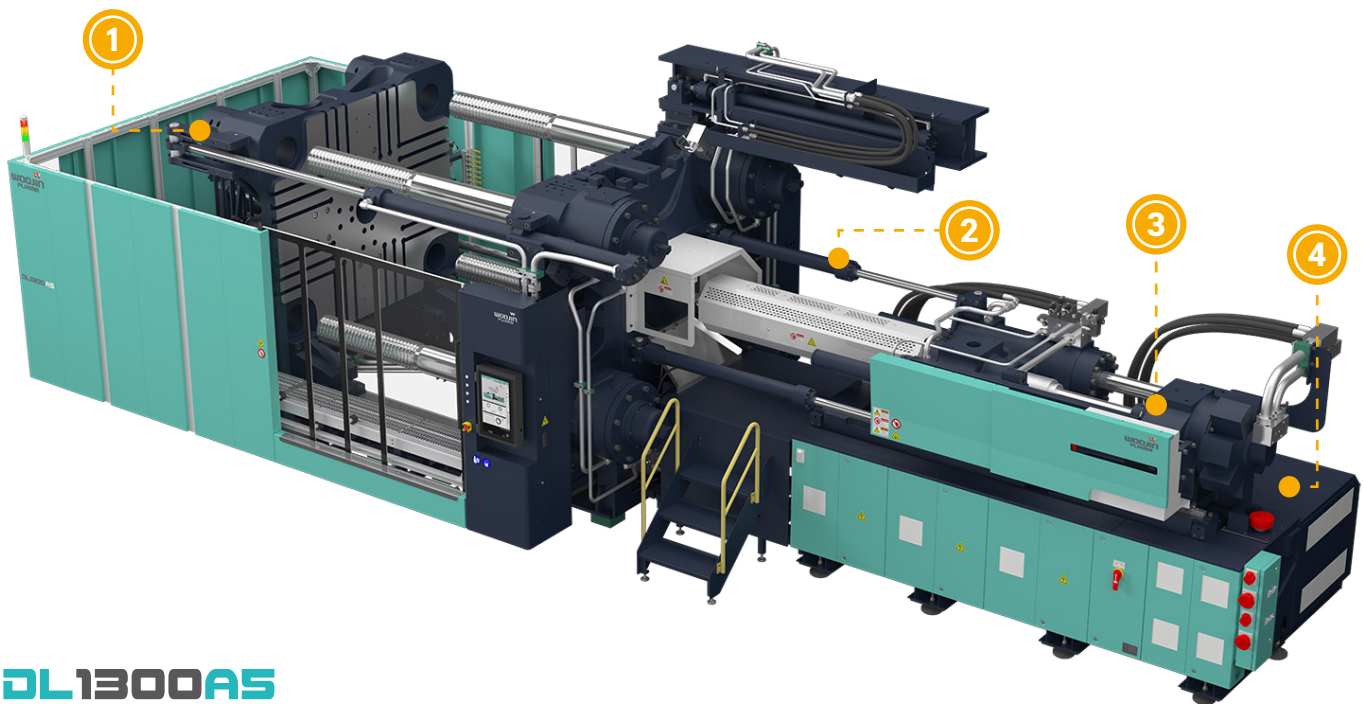

DL1300A5

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

1 Half nut synchronous control device

- | Minimize cycle time
- | Fast and precise locking action

2 Dual-pull nozzle touch cylinder

- | Symmetrical nozzle touch cylinders, durable all over the axis
- | Secure stable nozzle touch pressure

3 Injection unit


- | Back pressure closed-loop control improves injection reproducibility and responsiveness
- | Stable injection control enabled by a 2-axis injection structure.

4 Hydraulic unit

- | High efficiency servo pump system
- | Application of Parker valve and Dorninger hydraulic manifold
- | Independent filter & cooling system

FEATURES

WIDE TIE-BAR SPACING

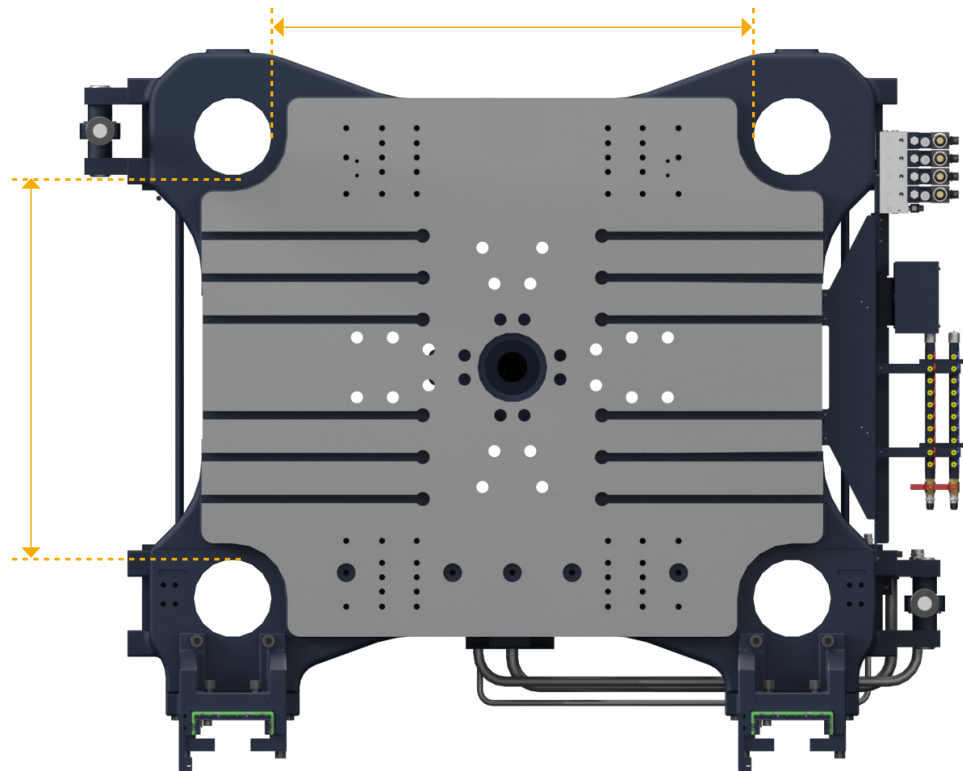




1 Mold Mounting Interface

- | Class-leading platen size and tie-bar spacing, even compared with European manufacturers
- | Provides a wider mold installation area

2 High Mold Compatibility

- | Platen design optimized for mold compatibility
- | Capable of mounting molds up to 62 tons (DL2000A5 standard)

HEAVY MOLD MOUNTING CAPABILITY

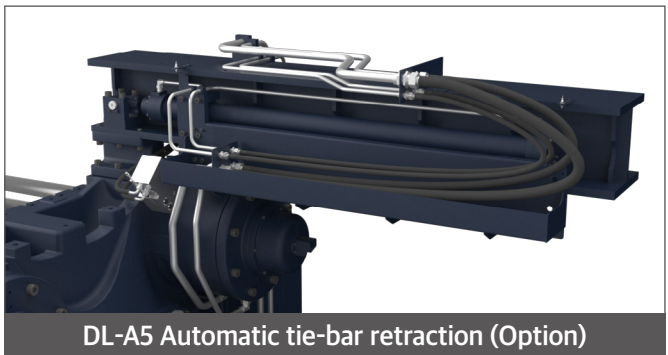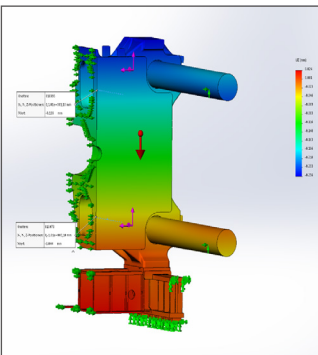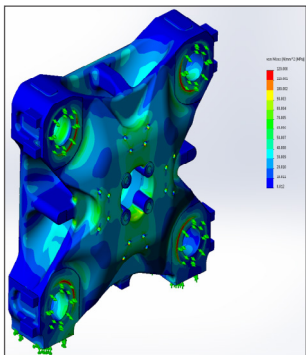

DL-A5 Automatic tie-bar retraction (Option)

1 X-Shaped Platen Design


- | Optimal design achieved through FEA analysis by an WOOJIN PLAImm GmbH(Austria)
- | Simple casting reference point for high platen stiffness
- | Separable booster cylinder applied to stationary mold platen and optimized for use with retractable tie bar.

2 Automatic tie-bar retraction (Option)

- | Easy & prompt big sized mold installation
- | Maximizes available space and ideal for installing large molds
- | Installation available on either the operator side or non-operator side

FEATURES

ENHANCED POSITION REPEATABILITY

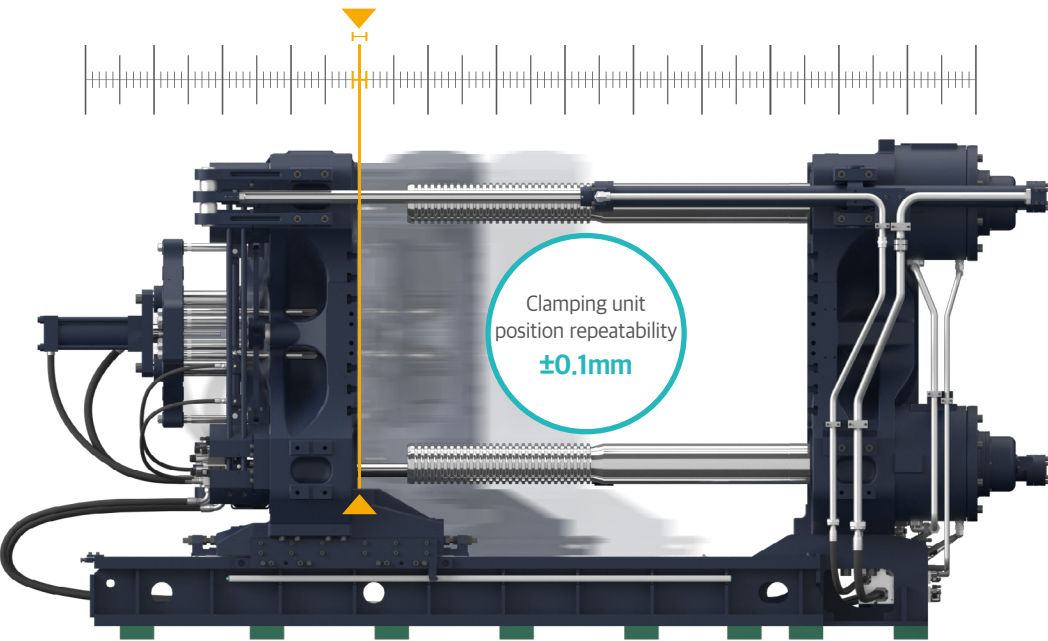

1 Platen Position Control

- | During mold opening and closing, flow rate can be rapidly controlled using a proportional valve and bypass system
- | Valve port opening enables precise control of the mold protection zone




Proportional Valve

Proportional Valve Control System

- | Optimal flow control with an improved valve spool design
- | PARKER(Made in Germany)

ENERGY CONSUMPTION CLASS


- | Achieves "Class 8" energy consumption of 0.38 kWh/kg or less based on EUROMAP 60.1
- | Reduces electricity costs by more than 50% compared to conventional hydraulic systems using three-phase induction motors



INJECTION CONTROL CAPABILITY

1 Enhanced Injection Performance

- | Equipped with a fixed-displacement pump and a back pressure proportional valve
- | In-house screw design optimized considering resin characteristics
- | Ensures stable injection weight even under high-speed or high-pressure conditions

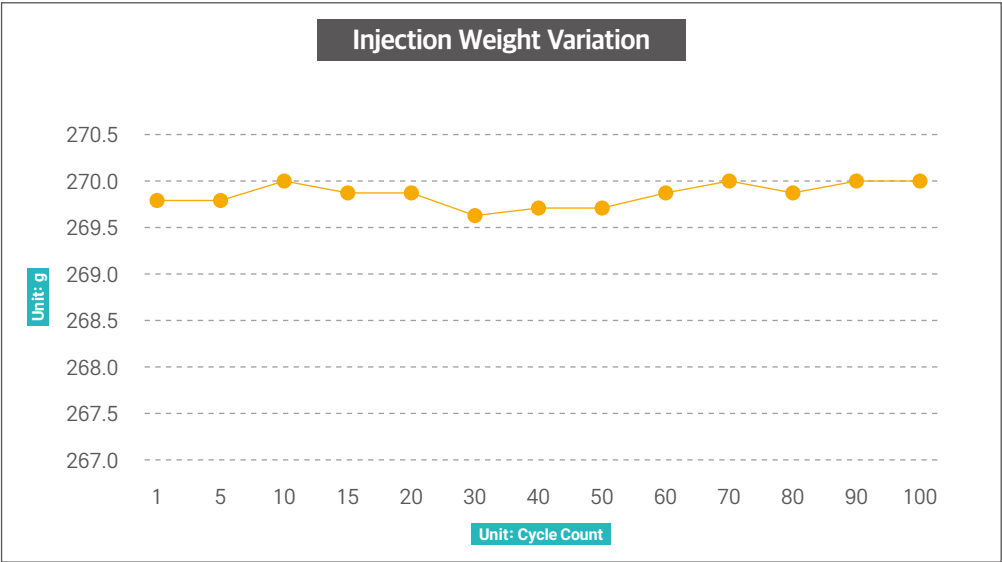

DL850A5

Product	Electronic Product Cover
Resin	PP
Cavity	1 Cavity
Cycle Time	40 Sec

※ Specifications may vary depending on the mold, raw material, and product specifications




KEB Servo Motor



KEB Drive



Hydraulic Pump

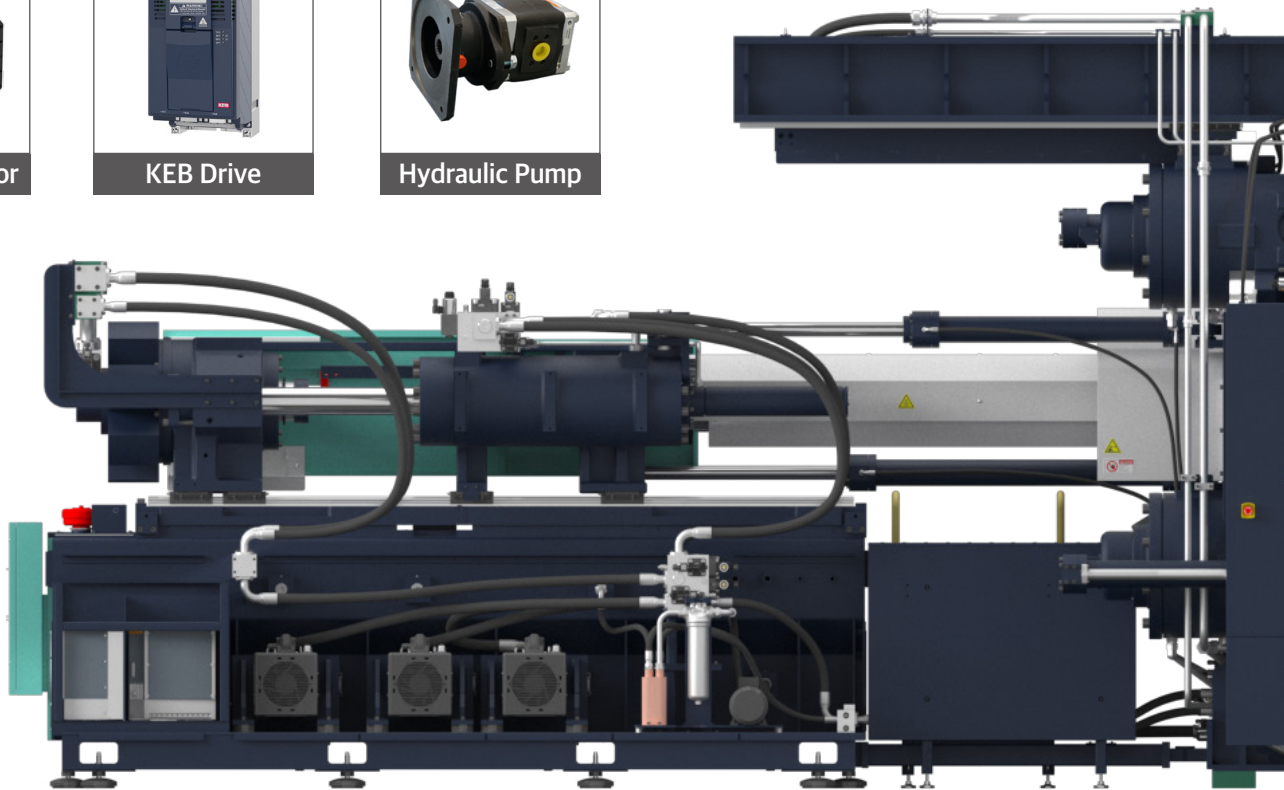

CONTROLLER

IMC 510




* The Red Dot Award is a globally prestigious design award, and together with Germany's iF Design Award and the USA's IDEA, it is recognized as one of the world's top three design awards

FEATURES

- Equipped with B&R Controller
- 21-inch Full HD Touch Screen
- User Interface (UI/UX) Optimized for IMM
- Injection process design using Smart Sequence
- Review processes and receive feedback through PLAImm-X
- Process management analysis and energy monitoring
- Supports OPC-UA (EUROMAP 77)
- Data provided via SQL and CSV
- Peripheral device monitoring and remote support services available
- Check operation sequence with Overview Chain
- View clamping and injection graphs on a single page
- Frequently used functions managed through custom tabs

MAIN PAGE SCREEN CONFIGURATION

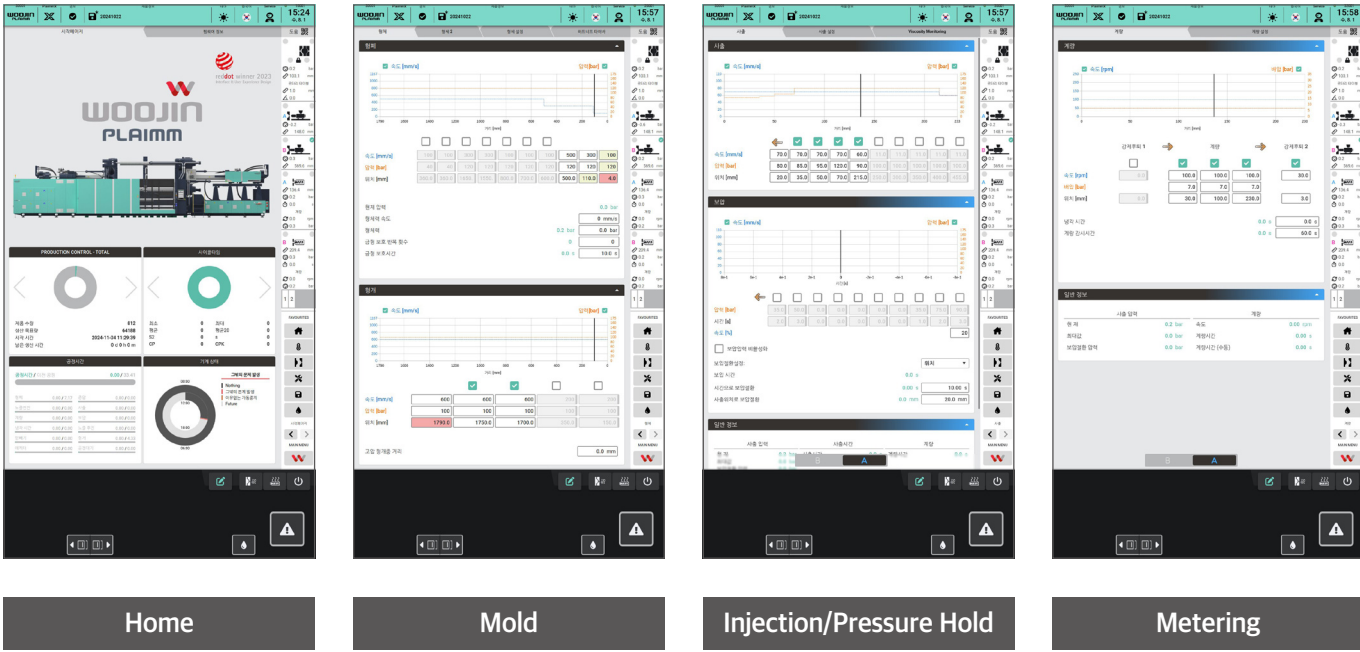


※ This controller may be changed without prior notice due to optional specifications or software updates.

SMART INJECTION TECHNOLOGY



※ Smart injection molding functions may be changed without prior notice due to software updates or product improvements.



1 Flash Monitoring

- A function that detects mold flash occurring during the injection molding process to improve and stabilize product quality
- Direct clamping type: Flash measured by tie-bar position sensor
- Toggle type: Flash measured by clamping force sensor



2 Weight Control

- A function that automatically adjusts holding pressure and metering process settings based on Viscosity Monitoring to minimize injection weight variations caused by changes in molten resin viscosity
- Benefits
 - ① Improved quality stability when molding recycled resins or eco-friendly specialty materials
 - ② Reduced scrap and improved productivity through defect reduction
 - ③ Supports environmental initiatives such as carbon neutrality and SDGs



3 Smart Sequencer

- A function that enables flexible operation configuration in the automatic mode of the injection molding machine
- Allows easy setup of special operation sequences and automatically calculates axis interlocks to ensure equipment safety

SMART INJECTION TECHNOLOGY

(OPTION)




4 Edge Controller

- | Data integration converter function for peripheral devices via 4-channel RS485 communication
- | Connectable with various peripheral equipment such as mold temperature controllers, dryers, chillers, and hot runner controllers
- | Capable of collecting peripheral device data and transmitting it to a cloud server




5 Energy Monitoring

- | Displays energy consumption separately for hydraulic or electric systems and cylinder heating
- | Measures and displays energy consumption by each stage of the injection molding process (Mold Closing / Injection / Holding / Metering / Cooling / Mold Opening / Ejector)
- | Helps reduce power consumption by comparing energy usage during production and downtime



6 Machine Test

- | A function that allows easy inspection and testing of the injection molding machine status
- | Enables periodic machine maintenance even for first-time users
- | Provides test functions for clamping force, injection pressure, and injection speed (additional Machine Test items planned)



7 Mold Recognition

(Coming Soon)

- | A function that enables one-touch setup of recipes for the injection molding machine, take-out robot, and peripheral equipment using mold ID information
- | Mold ID can be selected from RF-ID, QR code, or barcode



8 Data Collection Function

(Coming Soon)

- | A function that provides detailed time-series data from the injection molding machine
 - Data requiring detailed analysis
 - ① Actual and set values of injection pressure, speed, and position
 - ② clamping pressure, speed, position, and four tie-bar data
 - ③ Includes 2K (Injection A / B) data
 - Data with minimal variation
 - ① Temperature data (nozzle, barrel, hopper, hydraulic oil, etc.)
 - ② includes shot-based data for quality analysis

SPECIFICATIONS

DL-A5 VER.1

MODEL		DL450A5			DL550A5			DL650A5			DL850A5		
Injection Unit		IH2800			IH4200			IH5900			IH8800		
Screw & Barrel		O	A	B	O	A	B	O	A	B	O	A	B
Screw diameter	mm	65	70	80	70	80	90	80	90	105	95	105	115
Injection pressure	kg/cm²	2191	1889	1446	2465	1887	1491	2386	1885	1385	2145	1756	1464
	Mpa	215	185	142	242	185	146	234	185	136	210	172	144
Theoretical injection volume	cm³	1278	1482	1935	1693	2212	2799	2488	3149	4286	4111	5022	6024
Shot weight(PS)	g	1177	1365	1783	1560	2038	2579	2293	2902	3950	3788	4628	5551
Injection rate	cm³/s	407	472	617	461	602	762	603	763	1039	852	1041	1248
Screw stroke	mm	385			440			495			580		
Injection speed	mm/s	123			120			120			120		
Plasticizing capacity (PS)	kg/h	207	252	358	231	328	449	298	408	619	393	515	660
Screw rotation speed	rpm	180			165			150			125		
Clamping Unit													
Clamping force	ton(kN)	450(4413)			550(5394)			650(6374)			850(8336)		
Mold opening force	ton(kN)	34(331)			41(405)			49(478)			64(625)		
Distance between tie-bar(HxV)	mm	860 x 810			915 x 915			1010 x 1010			1110 x 1110		
Platen dimension (HxV)	mm	1240 x 1190			1330 x 1330			1460 x 1460			1610 x 1610		
Daylight	mm	1450			1600			1800			2300		
Min. mold height	mm	350			400			450			500		
Max. mold height	mm	800			950			1100			1200		
Ejector force	ton(kN)	11.1(108.9)			16.6(162.8)			19.8(194.2)			26.9(263.8)		
Ejector stroke	mm	200			220			250			250		
Dry cycle time	sec	3.3			3.3			3.3			4.0		
Max. mold weight (Fixed / Moving / Total)	ton	3.5 / 3.5 / 5.0			4.0 / 4.0 / 6.0			5.5 / 5.5 / 8.0			7.0 / 7.0 / 10.5		
General													
Heater capacity	kW	18.4	20.6	24.1	23.0	26.7	30.7	29.4	33.6	39.3	39.7	44.7	49.4
Motor capacity	kW	65.2			87.6			87.6			110.0		
Total electric power capacity	kW	83.6	85.8	89.3	110.6	114.3	118.3	117.0	121.2	126.9	149.7	154.7	159.4
Hydraulic oil tank capacity	L	600			800			800			920		
Machine weight (Clamping+Injection)	ton	19 (13.5 + 5.5)			26 (17 + 9)			32 (21.5 + 10.5)			41 (29 + 12)		
Machine dimension (LxWxH)	m	7.6 x 2.4 x 2.2			7.7 x 2.8 x 2.2			8.2 x 2.9 x 2.3			9.6 x 3.2 x 2.5		
Cooling water consumption	L/min	130			130			130			180		

SPECIFICATIONS

DL-AS VER.1

MODEL		DL1050A5			DL1300A5		DL1600A5		DL1800A5	
Injection Unit		IH8800			IH11900		IH11900		IH15300	
Screw & Barrel		O	A	B	A	B	A	B	A	B
Screw diameter	mm	95	105	115	115	125	115	125	125	140
Injection pressure	kg/cm²	2145	1756	1464	1809	1531	1809	1531	1814	1446
	Mpa	210	172	144	177	150	177	150	178	142
Theoretical injection volume	cm³	4111	5022	6024	6544	7731	6544	7731	8382	10514
Shot weight(PS)	g	3788	4628	5551	6030	7124	6030	7124	7724	9689
Injection rate	cm³/s	852	1041	1248	1249	1475	1249	1475	1296	1626
Screw stroke	mm	580			630		630		685	
Injection speed	mm/s	120			120		120		106	
Plasticizing capacity (PS)	kg/h	393	515	660	607	757	607	757	692	939
Screw rotation speed	rpm	125			115		115		105	
Clamping Unit										
Clamping force	ton(kN)	1050(10297)			1300(12749)		1600(15691)		1800(17652)	
Mold opening force	ton(kN)	79(772)			98(956)		120(1177)		135(1324)	
Distance between tie-bar(HxV)	mm	1410 x 1110			1410 x 1410		1570 x 1285		1810 x 1610	
Platen dimension (HxV)	mm	1950 x 1650			1950 x 1950		2160 x 1925		2450 x 2180	
Daylight	mm	2400			2500		3200		3200	
Min. mold height	mm	600			700		700		700	
Max. mold height	mm	1200			1200		1500		1600	
Ejector force	ton(kN)	26.9(263.8)			34.4(337.3)		34.4(337.3)		44.5(436.4)	
Ejector stroke	mm	250			300		300		300	
Dry cycle time	sec	4.4			5.0		5.0		5.8	
Max. mold weight (Fixed / Moving / Total)	ton	8.5 / 8.5 / 13.0			12.0 / 12.0 / 17.0		14.0 / 14.0 / 21.0		16.0 / 16.0 / 24.0	
General										
Heater capacity	kW	39.7	44.7	49.4	54.7	58.1	54.7	58.1	61.6	70.8
Motor capacity	kW	110.0			142.6		142.6		142.6	
Total electric power capacity	kW	149.7	154.7	159.4	197.3	200.7	197.3	200.7	204.2	213.4
Hydraulic oil tank capacity	L	920			1150		1150		1450	
Machine weight (Clamping+Injection)	ton	50 (37.5 + 12.5)			67 (50 + 17)		77 (60 + 17)		89 (70 + 19)	
Machine dimension (LxWxH)	m	10.0 x 3.5 x 2.5			10.8 x 3.6 x 2.9		11.6 x 3.8 x 2.9		12.4 x 4.1 x 3.4	
Cooling water consumption	L/min	180			180		180		180	

01. The oretical injection volume: cross section of screw*screw stroke.
02. The minimum mold size must be at least 70% of the tie bar distance.
03. The specifications might be changed without any prior notice.
04. The metering distance is recommended in the arrge of 1 to 3 times of screw diamteer.
05. Machine dimensions may vary when the injection unit moves UP or DOWN.

DL-AS VER.2

MODEL		DL500A5			DL600A5			DL700A5			DL900A5			DL1100A5		
Injection Unit		IH2800			IH4200			IH5900			IH8800			IH8800		
Screw & Barrel		O	A	B	O	A	B	O	A	B	O	A	B	O	A	B
Screw diameter	mm	65	70	80	70	80	90	80	90	105	95	105	115	95	105	115
Injection pressure	kg/cm²	2191	1889	1446	2465	1887	1491	2386	1885	1385	2145	1756	1464	2145	1756	1464
	Mpa	215	185	142	242	185	146	234	185	136	210	172	144	210	172	144
Theoretical injection volume	cm³	1278	1482	1935	1693	2212	2799	2488	3149	4286	4111	5022	6024	4111	5022	6024
Shot weight(PS)	g	1177	1365	1783	1560	2038	2579	2293	2902	3950	3788	4628	5551	3788	4628	5551
Injection rate	cm³/s	407	472	617	461	602	762	603	763	1039	852	1041	1248	852	1041	1248
Screw stroke	mm	385			440			495			580			580		
Injection speed	mm/s	123			120			120			120			120		
Plasticizing capacity (PS)	kg/h	207	252	358	231	328	449	298	408	619	393	515	660	393	515	660
Screw rotation speed	rpm	180			165			150			125			125		
Clamping Unit																
Clamping force	ton(kN)	500(4903)			600(5884)			700(6865)			900(8826)			1100(10787)		
Mold opening force	ton(kN)	38(368)			45(441)			53(515)			68(662)			83(809)		
Distance between tie-bar(HxV)	mm	920 x 830			1040 x 910			1110 x 1010			1200 x 1120			1420 x 1170		
Platen dimension (HxV)	mm	1280 x 1260			1420 x 1370			1520 x 1490			1720 x 1610			1870 x 1820		
Daylight	mm	1650			1750			1850			2100			2400		
Min. mold height	mm	350			400			450			500			600		
Max. mold height	mm	900			950			950			1100			1200		
Ejector force	ton(kN)	11.1(108.9)			16.6(162.8)			19.8(194.2)			26.9(263.8)			26.9(263.8)		
Ejector stroke	mm	200			220			250			250			250		
Dry cycle time	sec	3.3			3.3			3.3			4.0			4.4		
Max. mold weight (Fixed / Moving / Total)	ton	5.3 / 5.3 / 8.0			6.7 / 6.7 / 10.0			7.3 / 7.3 / 11.0			8.6 / 8.6 / 13.0			14.0 / 14.0 / 21.0		
General																
Heater capacity	kW	18.4	20.6	24.1	23.0	26.7	30.7	29.4	33.6	39.3	39.7	44.7	49.4	39.7	44.7	49.4
Motor capacity	kW	65.2			87.6			87.6			110.0			110.0		
Total electric power capacity	kW	83.6	85.8	89.3	110.6	114.3	118.3	117.0	121.2	126.9	149.7	154.7	159.4	149.7	154.7	159.4
Hydraulic oil tank capacity	L	600			800			800			920			920		
Machine weight (Clamping+Injection)	ton	19 (13.5 + 5.5)			26 (17 + 9)			32 (21.5 + 10.5)			41 (29 + 12)			50 (37.5 + 12.5)		
Machine dimension (LxWxH)	m	7.9 x 2.7 x 2.2			8.1 x 2.9 x 2.2			8.4 x 3.1 x 2.4			9.7 x 3.4 x 2.5			9.9 x 3.6 x 2.7		
Cooling water consumption	L/min	130			130			130			180			180		

SPECIFICATIONS

DL-A5 VER.2

MODEL		DL1300A5		DL1800A5		DL2000A5		DL2300A5		DL2500A5		DL2700A5	
Injection Unit		IH11900		IH15300		IH15300		IH15300		IH21500		IH21500	
Screw & Barrel		A	B	A	B	A	B	A	B	A	B	A	B
Screw diameter	mm	115	125	125	140	125	140	125	140	140	160	140	160
Injection pressure	kg/cm²	1809	1531	1814	1446	1814	1446	1814	1446	1816	1391	1816	1391
	Mpa	177	150	178	142	178	142	178	142	178	136	178	136
Theoretical injection volume	cm³	6544	7731	8406	10545	8406	10545	8406	10545	11853	15482	11853	15482
Shot weight(PS)	g	6030	7124	7746	9717	7746	9717	7746	9717	10923	14266	10923	14266
Injection rate	cm³/s	1249	1475	1296	1626	1296	1626	1296	1626	1537	2007	1537	2007
Screw stroke	mm	630		685		685		685		770		770	
Injection speed	mm/s	120		106		106		106		100		100	
Plasticizing capacity (PS)	kg/h	607	757	692	939	692	939	692	939	850	1218	850	1218
Screw rotation speed	rpm	115		105		105		105		95		95	
Clamping Unit													
Clamping force	ton(kN)	1300(12749)		1800(17652)		2000(19613)		2300(22555)		2500(24517)		2700(26478)	
Mold opening force	ton(kN)	98(956)		135(1324)		150(1471)		173(1692)		188(1839)		203(1986)	
Distance between tie-bar(HxV)	mm	1580 x 1280		1850 x 1610		2020 x 1610		2020 x 1610		2180 x 1760		2180 x 1760	
Platen dimension (HxV)	mm	2230 x 1990		2450 x 2200		2600 x 2250		2600 x 2250		3020 x 2610		3020 x 2610	
Daylight	mm	3050		3400		3600		3600		3900		3900	
Min. mold height	mm	700		700		800		800		900		900	
Max. mold height	mm	1400		1600		1700		1700		2000		2000	
Ejector force	ton(kN)	34.4(337.3)		44.5(436.4)		44.5(436.4)		44.5(436.4)		67.8(664.9)		67.8(664.9)	
Ejector stroke	mm	300		300		300		300		350		350	
Dry cycle time	sec	5.0		5.8		5.8		5.8		8.2		8.2	
Max. mold weight (Fixed / Moving / Total)	ton	20.0 / 20.0 / 30.0		30.0 / 30.0 / 45.0		41.0 / 41.0 / 62.0		41.0 / 41.0 / 62.0		50.0 / 50.0 / 75.0		50.0 / 50.0 / 75.0	
General													
Heater capacity	kW	54.7	58.1	61.6	70.8	61.6	70.8	61.6	70.8	78.4	93.1	78.4	93.1
Motor capacity	kW	142.6		142.6		142.6		142.6		165.0		165.0	
Total electric power capacity	kW	197.3	200.7	204.2	213.4	204.2	213.4	204.2	213.4	243.4	258.1	243.4	258.1
Hydraulic oil tank capacity	L	1150		1450		1450		1450		1650		1650	
Machine weight (Clamping+Injection)	ton	72 (55 + 17)		89 (70 + 19)		115 (96 + 19)		115 (96 + 19)		143 (121 + 22)		143 (121 + 22)	
Machine dimension (LxWxH)	m	11.3 x 3.9 x 2.9		12.8 x 4.2 x 3.4		13.1 x 4.5 x 3.4		13.1 x 4.5 x 3.4		14.9 x 4.7 x 3.7		14.9 x 4.7 x 3.7	
Cooling water consumption	L/min	180		180		180		180		240		240	

01. The oretical injection volume: cross section of screw*screw stroke.
02. The minimum mold size must be at least 70% of the tie bar distance.
03. The specifications might be changed without any prior notice.

04. The metering distance is recommended in the arnge of 1 to 3 times of screw diamteer.
05. Machine dimensions may vary when the injection unit moves UP or DOWN.

MODEL		DL3000A5						DL3300A5						
Injection Unit		IH33000		IH48000			IH33000		IH48000			IH66500		
Screw & Barrel		A	B	O	A	B	A	B	O	A	B	O	A	B
Screw diameter	mm	160	180	180	190	200	160	180	180	190	200	200	215	230
Injection pressure	kg/cm²	1800	1400	1800	1600	1450	1800	1400	1800	1600	1450	1800	1550	1360
	Mpa	177	137	177	157	142	177	137	177	157	142	177	152	133
Theoretical injection volume	cm³	16085	20358	22902	25518	28274	16085	20358	22902	25518	28274	34558	39936	45702
Shot weight(PS)	g	14822	18759	21104	23514	26055	14822	18759	21104	23514	26055	31845	36801	42115
Injection rate	cm³/s	1719	2176	2127	2370	2626	1719	2176	2127	2370	2626	2117	2447	2800
Screw stroke	mm	800		900			800		900			1100		
Injection speed	mm/s	85		84			85		84			67		
Plasticizing capacity (PS)	kg/h	1000	1378	1325	1528	1533	1000	1378	1325	1528	1533	1415	1705	1693
Screw rotation speed	rpm	78		75		65	78		75		65	60		50
Clamping Unit														
Clamping force	ton(kN)	3000(29420)						3300(32362)						
Mold opening force	ton(kN)	225(2206)						248(2427)						
Distance between tie-bar(HxV)	mm	2260 x 1810						2260 x 1810						
Platen dimension (HxV)	mm	3140 x 2660						3140 x 2660						
Daylight	mm	4000						4000						
Min. mold height	mm	1100						1100						
Max. mold height	mm	2000						2000						
Ejector force	ton(kN)	67.8(664.9)						67.8(664.9)						
Ejector stroke	mm	350						350						
Dry cycle time	sec	8.2						8.2						
Max. mold weight (Fixed / Moving / Total)	ton	56.0 / 56.0 / 85.0						56.0 / 56.0 / 85.0						
General														
Heater capacity	kW	149.1	167.1	178.4	183.6	194.3	149.1	167.1	178.4	183.6	194.3	217.1	231.9	249.8
Motor capacity	kW	220.0		275.0			220.0		275.0			275.0		
Total electric power capacity	kW	369.1	387.1	453.4	458.6	469.3	369.1	387.1	453.4	458.6	469.3	492.1	506.9	524.8
Hydraulic oil tank capacity	L	2650		3200			2650		3200			3400		
Machine weight (Clamping+Injection)	ton	180 (149 + 31)		194 (149 + 45)			180 (149 + 31)		194 (149 + 45)			204 (149 + 55)		
Machine dimension (LxWxH)	m	16.5 x 5.0 x 4.0		18.0 x 5.0 x 4.0			16.5 x 5.0 x 4.0		18.0 x 5.0 x 4.0			19.1 x 5.0 x 4.0		
Cooling water consumption	L/min	240		240			240		240			240		

SPECIFICATIONS


DL-A5 VER.2

MODEL		DL4000A5						DL4300A5					
Injection Unit		IH66500			IH100000			IH66500			IH100000		
Screw & Barrel		O	A	B	O	A	B	O	A	B	O	A	B
Screw diameter	mm	200	215	230	230	245	260	200	215	230	230	245	260
Injection pressure	kg/cm²	1800	1550	1360	1600	1400	1220	1800	1550	1360	1600	1400	1220
	Mpa	177	152	133	157	137	120	177	152	133	157	137	120
Theoretical injection volume	cm³	34558	39936	45702	56089	63644	71675	34558	39936	45702	56089	63644	71675
Shot weight(PS)	g	31845	36801	42115	51686	58648	66049	31845	36801	42115	51686	58648	66049
Injection rate	cm³/s	2117	2447	2800	2925	3319	3738	2117	2447	2800	2925	3319	3738
Screw stroke	mm	1100			1350			1100			1350		
Injection speed	mm/s	67			70			67			70		
Plasticizing capacity (PS)	kg/h	1415	1705	1693	1693	1998	2102	1415	1705	1693	1693	1998	2102
Screw rotation speed	rpm	60		50	50		45	60		50	50		45
Clamping Unit													
Clamping force	ton(kN)	4000(39227)						4300(42169)					
Mold opening force	ton(kN)	300(2942)						323(3163)					
Distance between tie-bar(HxV)	mm	2350 x 2050						2350 x 2050					
Platen dimension (HxV)	mm	3400 x 3100						3400 x 3100					
Daylight	mm	4400						4400					
Min. mold height	mm	1100						1100					
Max. mold height	mm	2200						2200					
Ejector force	ton(kN)	67.8(664.9)						67.8(664.9)					
Ejector stroke	mm	400						400					
Dry cycle time	sec	9.2						9.2					
Max. mold weight (Fixed / Moving / Total)	ton	66.0 / 66.0 / 100.0						66.0 / 66.0 / 100.0					
General													
Heater capacity	kW	217.1	231.9	249.8	340.2	357.4	378.0	217.1	231.9	249.8	340.2	357.4	378.0
Motor capacity	kW	275.0			330.0			275.0			330.0		
Total electric power capacity	kW	492.1	506.9	524.8	670.2	687.4	708.0	492.1	506.9	524.8	670.2	687.4	708.0
Hydraulic oil tank capacity	L	3400			3500			3400			3500		
Machine weight (Clamping+Injection)	ton	246 (191 + 55)			263 (191 + 72)			246 (191 + 55)			263 (191 + 72)		
Machine dimension (LxWxH)	m	19.8 x 5.8 x 4.5			20.6 x 5.8 x 4.5			19.8 x 5.8 x 4.5			20.6 x 5.8 x 4.5		
Cooling water consumption	L/min	240			240			240			240		

PLATEN DIMENSION

DL-A5 VER.1

Unit: mm






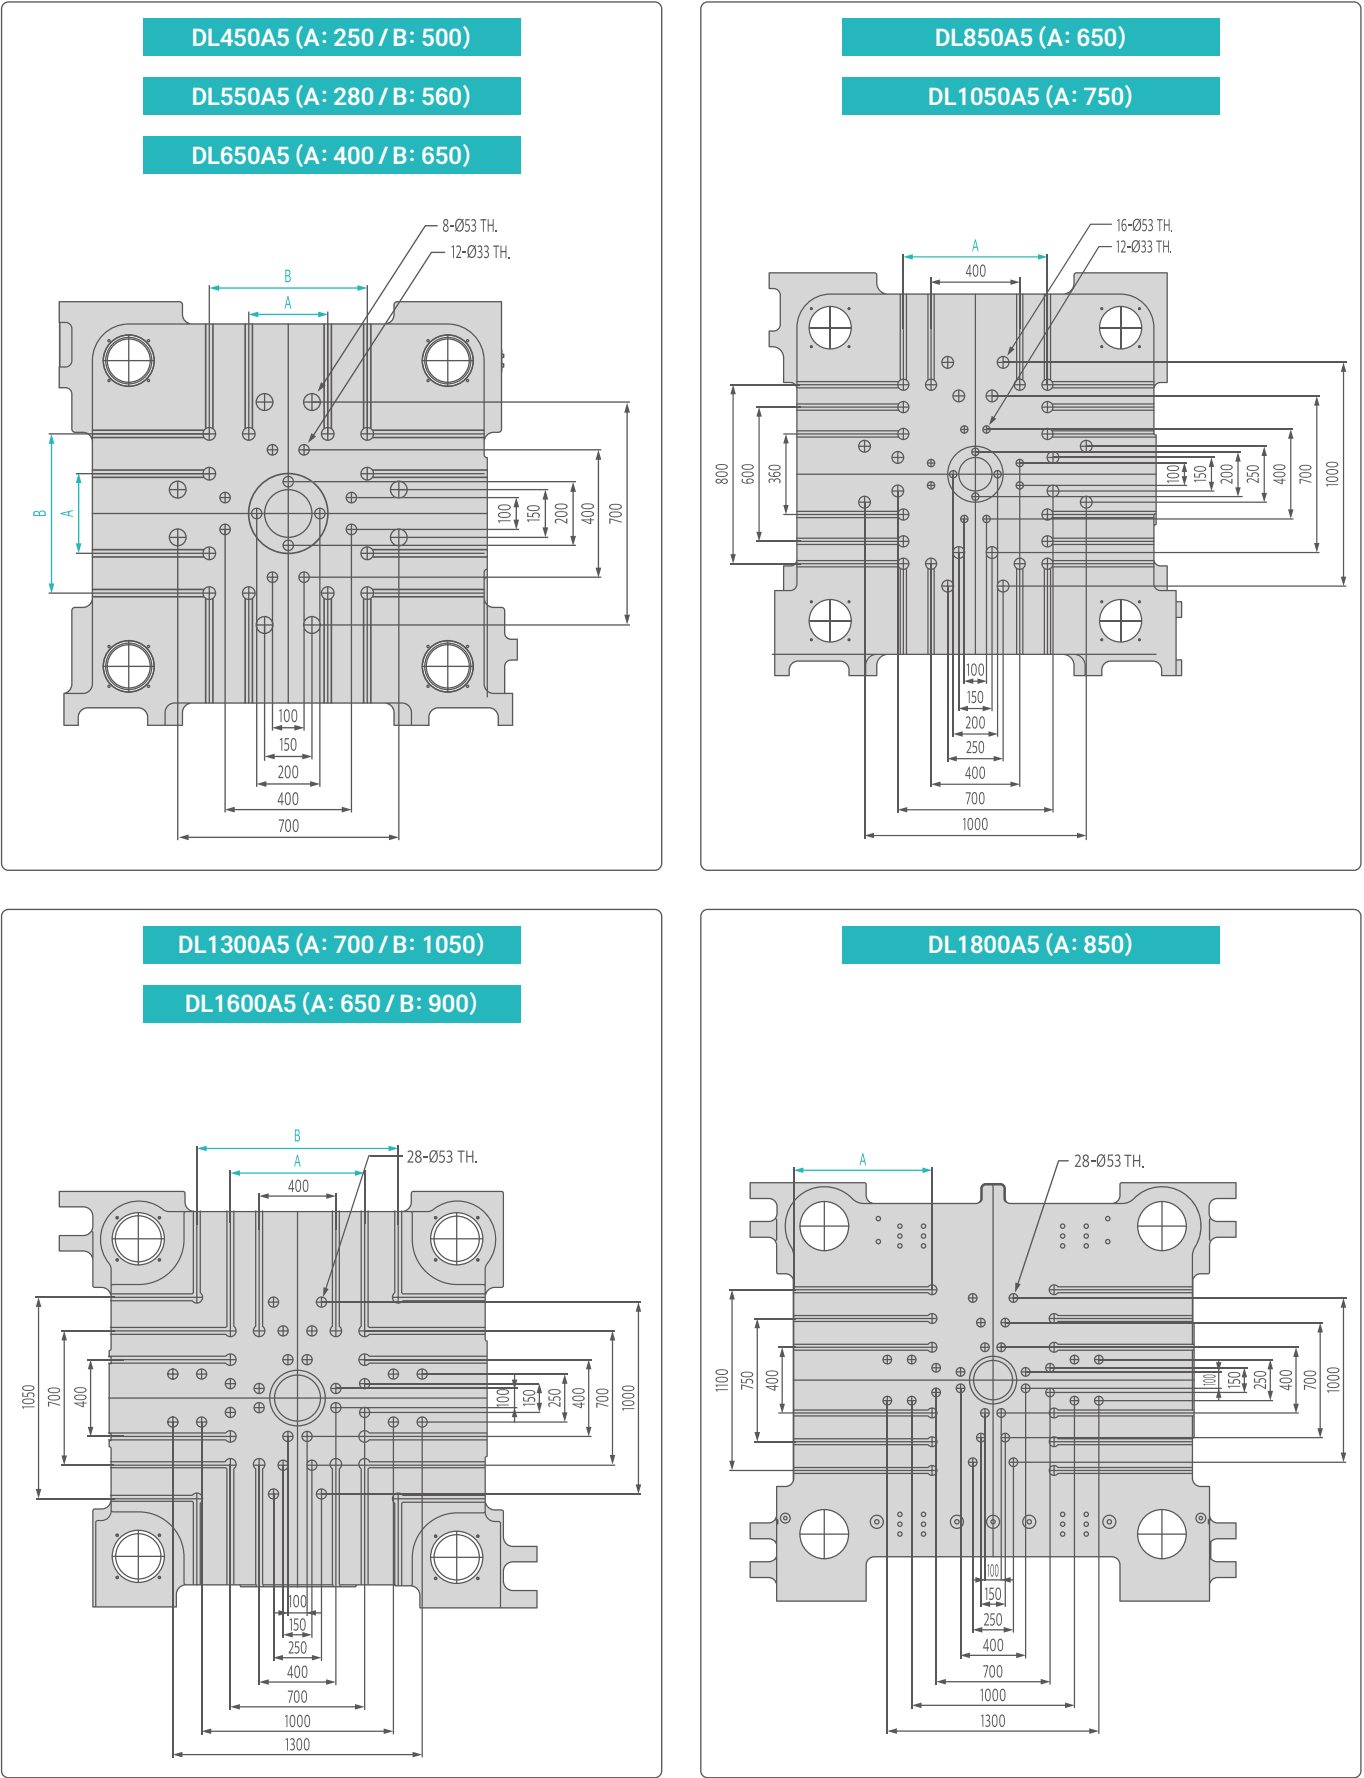


※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

PLATEN DIMENSION



DL-A5 VER.2

Unit: mm

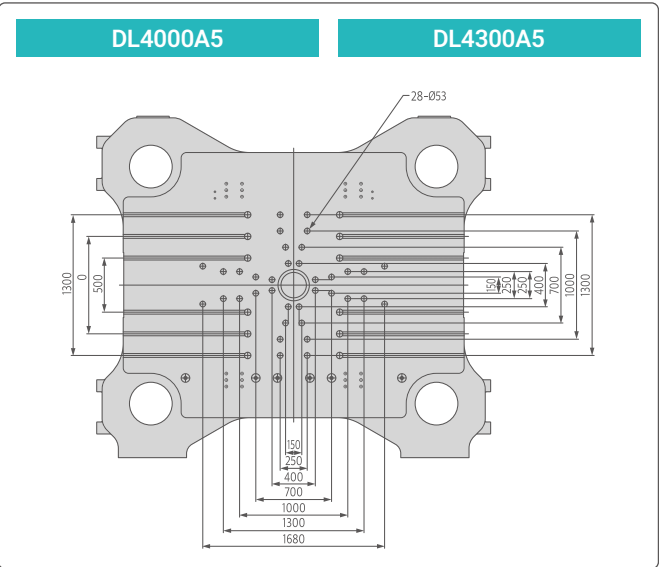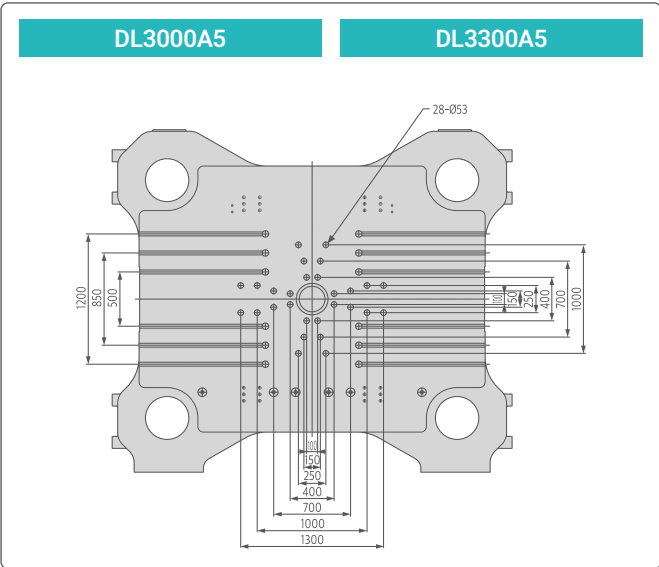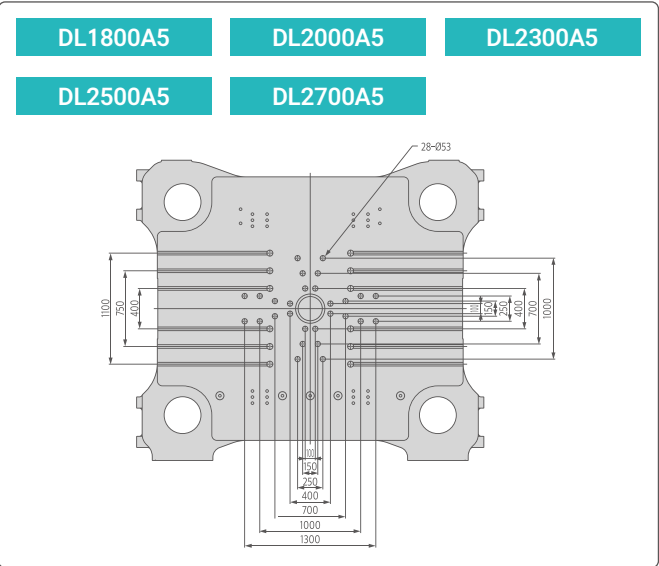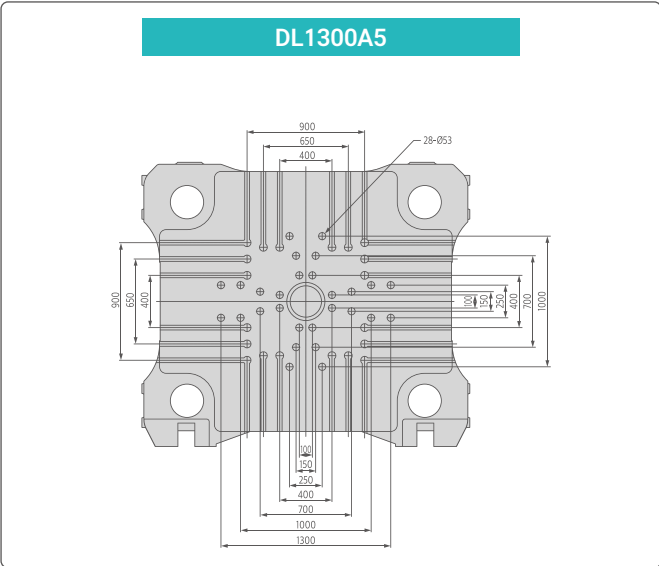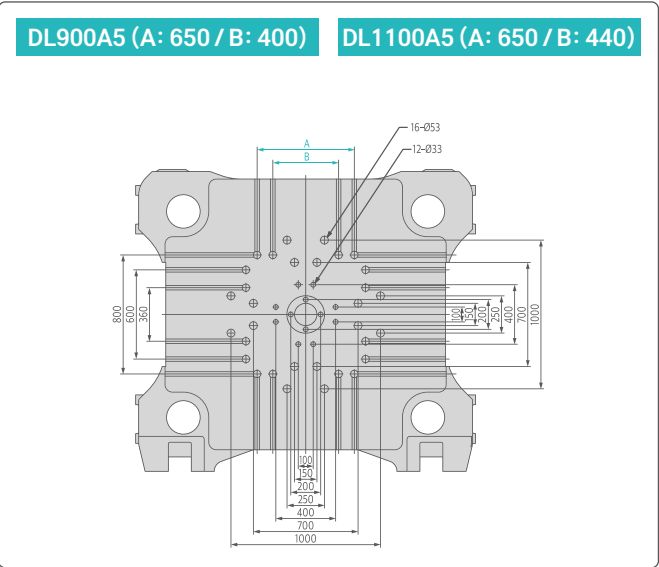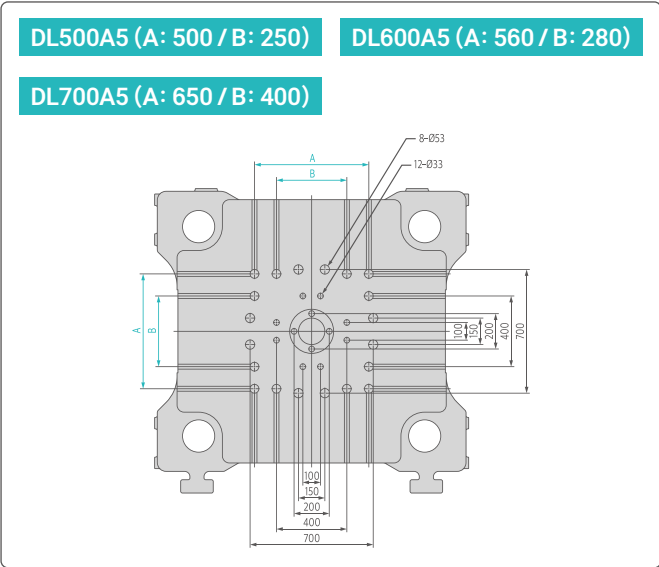

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

MACHINE DIMENSION

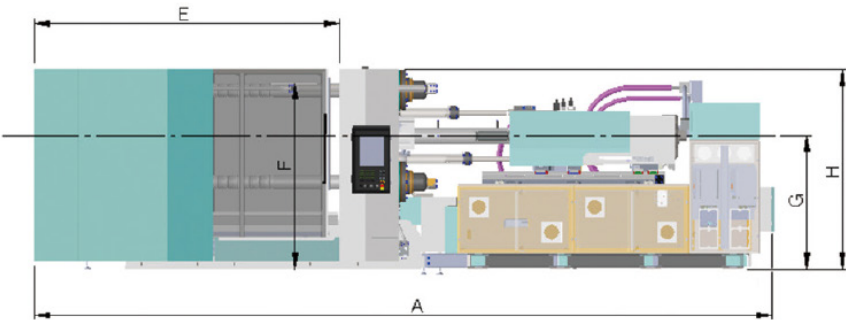

Unit: mm

Machine Dimension

Ver.1	A	B	C	D	E	F	G	H
DL450A5	7528	2340	1225	1115	2893	1965	1410	2140
DL550A5	7643	2808	1500	1308	3009	2033	1410	2200
DL650A5	8183	2907	1550	1357	3328	2035	1450	2370
DL850A5	9601	3158	1640	1518	3919	2245	1490	2465
DL1050A5	9984	3499	1789	1710	4305	2265	1490	2660
DL1300A5	10761	3545	1800	1745	4513	2661	1725	2901
DL1600A5	11527	3775	1915	1860	5238	2626	1725	2905
DL1800A5	12504	4098	2096	2002	5530	3028	1969	3371


Unit: mm

Machine Dimension

Ver.2	A	B	C	D	E	F	G	H
DL500A5	7852	2713	1452	1261	3247	1970	1410	2144
DL600A5	8057	2939	1530	1409	3341	2025	1410	2202
DL700A5	8372	3052	1564	1488	3494	2130	1450	2350
DL900A5	9681	3319	1700	1619	4016	2245	1490	2461
DL1100A5	9885	3586	1820	1766	4347	2400	1600	2665
DL1300A5	11335	3815	1935	1880	5088	2586	1725	2858
DL1800A5	12768	4123	2109	2014	5716	3035	1969	3340
DL2000A5	13054	4423	2284	2139	6083	3065	1969	3364
DL2300A5	13054	4423	2284	2139	6083	3065	1969	3364
DL2500A5	14852	4623	2394	2229	6767	3344	2135	3688
DL2700A5	14852	4623	2394	2229	6767	3344	2135	3688
DL3000A5	16437	4973	2599	2374	6917	3607	2335	3977
DL3300A5	16437	4973	2599	2374	6917	3607	2335	3977
DL4000A5	19800	5800	2900	2900	7495	4050	2595	4498
DL4300A5	19800	5800	2900	2900	7495	4050	2595	4498

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

MACHINE DIMENSION

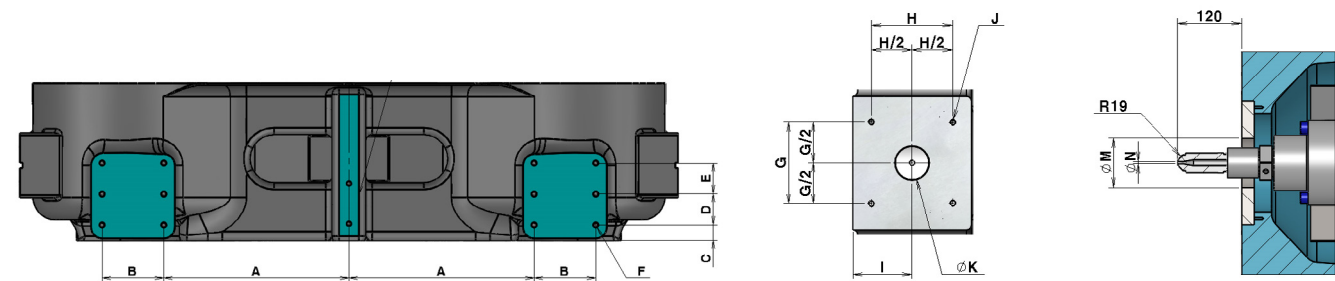

Unit: mm	Robot installation position dimension						Hopper installation position dimension				Nozzle dimension		
Ver.1	A	B	C	D	E	F	G	H	I	J	ØK	ØM	ØN
DL450A5	210	-	105	185	-	4-M20	165	165	120	4-M12	68	100	4
DL550A5	195	-	105	245	-	4-M20	165	165	130	4-M12	78	100	5
DL650A5	235	-	110	265	-	4-M24	165	165	140	4-M12	88	100	5
DL850A5	235	-	115	330	-	4-M24	165	165	170	4-M12	103	100	6
DL1050A5	335	-	125	375	-	4-M30	165	165	170	4-M12	103	100	6
DL1300A5	560	280	70	140	140	12-M24	280	200	190	4-M16	113	120	6
DL1600A5	560	280	70	140	140	12-M24	280	200	190	4-M16	113	120	6
DL1800A5	840	280	70	140	140	12-M24	280	200	112	4-M16	123	120	7

Unit: mm	Robot installation position dimension						Hopper installation position dimension				Nozzle dimension		
Ver.2	A	B	C	D	E	F	G	H	I	J	ØK	ØM	ØN
DL500A5	210	-	85	195	-	6-M20	165	165	120	4-M12	68	100	4
DL600A5	195	-	85	245	-	6-M20	165	165	130	4-M12	78	100	5
DL700A5	235	-	80	300	-	6-M24	165	165	140	4-M12	88	100	5
DL900A5	235	-	85	330	-	6-M24	165	165	170	4-M12	103	100	6
DL1100A5	335	-	85	375	-	6-M30	165	165	170	4-M12	103	100	6
DL1300A5	335	-	120	345	-	6-M30	280	200	190	4-M16	113	120	6
DL1800A5	495	-	115	485	-	6-M30	280	200	112	4-M16	123	120	7
DL2000A5	500	-	140	575	-	6-M36	280	200	112	4-M16	123	120	7
DL2300A5	500	-	140	575	-	6-M36	280	200	112	4-M16	123	120	7
DL2500A5	625	-	155	600	-	6-M36	280	200	132	4-M16	138	120	7
DL2700A5	625	-	155	600	-	6-M36	280	200	132	4-M16	138	120	7
DL3000A5	625	-	150	630	-	6-M36	280	200	218	4-M16	172	120	8
DL3300A5	625	-	150	630	-	6-M36	280	200	218	4-M16	172	120	8
DL4000A5	560	-	125	750	-	6-M36	280	200	235	4-M16	196	120	8
DL4300A5	560	-	125	750	-	6-M36	280	200	235	4-M16	196	120	8

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

OPTION LIST

Injection Unit	Clamping Unit	General
Standard		
01. Automatic Injection unit swiveling (Below 11900) 02. Single Flight Screw 03. Injection valve gate circuit (AC 1 + DC 1) 04. Back-Pressure Closed-loop system 05. PID Heating Control 06. Weekly Heating Timer 07. Cold screw start protection mode 08. Temperature display & Alarm in abnormal Temp. 09. Auto Purging 10. Injection Speed & Pressure step (10 step) 11. Holding Speed & Pressure step (5 step) 12. Charging Speed & Pressure step (3 step) 13. Back Pressure control step (3 step) 14. Injection Pressure Graph Display 15. Injection Speed Graph Display 16. Screw RPM Display 17. Cushion Display & Alarm 18. Charging time count & alarm 19. Screw & Barrel (Anti Wear)	01. Safety Foot-board (Above 1050ton) 02. Automatic safety Door open/close (Above 450ton) 03. Clamping area Curtain sensor (Above 550ton) 04. Hydraulic Core puller (Moving platen side, 1 stage) 05. Air blow-off unit (Fixed side 1 + Moving side 1) 06. Safety device(for electric & hydraulic) 07. Spring mold mode 08. Automatic Mold thickness adjust mode 09. Mold-Open Speed & Pressure step (5 step) 10. Ejector Speed & Pressure step (3 step)	01. Standard Maintenance tools 02. Standard spare part 03. Leveling pad 04. Cooling water distributor 05. Automatic grease lubrication (Clamping) 06. Robot interface (Standard) 07. 3 Phase electric outlet (2 ea) 08. Single Phase electric outlet (1 ea) 09. Steel tray for resin leakage 10. Hopper throat temperature control device 11. Hydraulic oil purification device 12. Hydraulic oil temperature control device 13. Hydraulic oil level alarm 14. Hydraulic oil temperature check & alarm 15. Hydraulic oil heating mode 16. 3 color alarm light 17. Shot data saving by external way 18. Production data statistics 19. Alarming & History save 20. Log history save 21. I/O circuit display 22. Shot data save (Internal 1,000 / External device)
Option		
01. Heater Disconnection check device 02. Hopper Slide (L/M) 03. Hopper Ladder & Stand 04. Screw & Barrel (Nitrided barrel) 05. Screw & Barrel (Anti Wear & Corrosive) 06. Valve Gate Circuit & Connector (Interior type) 07. Hydraulic Valve Gate Block (Interior type) 08. Pneumatic Valve Gate Block (Interior type) 09. Hydraulic Valve Gate Device (External device) 10. Nozzle cylinders equipped with Potentiometers 11. Charging on Fly (Pump type) 12. Charging on Fly (AC Motor) 13. Shut-off Nozzle (Pneumatic, Hydraulic, Spring) 14. Customized Design Screw(SB, Mixing, Coating)	01. Rotating Core Circuit 02. Safety Foot-board (Below 850ton) 03. Core & Ejector on Fly 04. Daylight Extension 05. Core-Back Mode 06. Core Pressure release Circuit (Automatic) 07. Core Pressure release Circuit (Manual) 08. Product Chute 09. Hydraulic Core Check Valve 10. Hydraulic Core Interlock Connector (EM13, WJ Standard) 11. Hydraulic Core Puller (2~8 Stages) 12. Mold ring on Moving-Platen 13. Spring type Ejector retraction 14. Ejector Check Valve 15. Ejector Interlock Connector (WJ Standard, EM13) 16. Ejector Forward / Backward External switch 17. Mold Insulation Platen 18. Pneumatic Core Puller (1-7 Stages)	01. Hydraulic Auto-Clamp unit 02. Anchor-bolt set (Clamping unit) 03. Heater Insulation Band 04. Automatic Grease Lubrication (Injection unit) 05. Robot Interface (EM12, EM67, EM67.1, SPI) 06. CMS (Central Monitoring System) 07. AVR (Automatic Voltage Regulator) on Electric Panel 08. UPS (Uninterruptable Power Supply) on Electric Panel 09. Dosing unit Interface (for Masterbatch) 10. Gas Injection Interface 11. Steam Injection Interface 12. External Temperature Display (F/P) 13. Interior type Hot Runner Controller (EM13, WJ Standard)


OPTION LIST

DL-A5 VER.2

Injection Unit	Clamping Unit	General
Standard		
01. Automatic Injection unit swiveling (Below IH 11900)	01. Safety Foot-board (Above 900ton)	01. Standard Maintenance tools
02. Single Flight Screw	02. Automatic safety Door open/close (Above 500ton)	02. Standard spare part
03. Injection valve gate circuit (AC 1 + DC 1)	03. Clamping area Curtain sensor	03. Leveling pad
04. Back-Pressure Closed-loop system	04. Hydraulic Core puller (Moving platen side, 1 stage)	04. Cooling water distributor
05. PID Heating Control	05. Air blow-off unit (Fixed side 1 + Moving side 1)	05. Automatic grease lubrication (Clamping)
06. Weekly Heating Timer	06. Safety device(for electric & hydraulic)	06. Robot interface (Standard)
07. Cold screw start protection mode	07. Spring mold mode	07. 3 Phase electric outlet (2 ea)
08. Temperature display & Alarm in abnormal Temp.	08. Automatic Mold thickness adjust mode	08. Single Phase electric outlet (1 ea)
09. Auto Purging	09. Mold-Open Speed & Pressure step (5 step)	09. Steel tray for resin leakage
10. Injection Speed & Pressure step (10 step)	10. Ejector Speed & Pressure step (3 step)	10. Hopper throat temperature control device
11. Holding Speed & Pressure step (5 step)		11. Hydraulic oil purification device
12. Charging Speed & Pressure step (3 step)		12. Hydraulic oil temperature control device
13. Back Pressure control step (3 step)		13. Hydraulic oil level alarm
14. Injection Pressure Graph Display		14. Hydraulic oil temperature check & alarm
15. Injection Speed Graph Display		15. Hydraulic oil heating mode
16. Screw RPM Display		16. 3 color alarm light
17. Cushion Display & Alarm		17. Shot data saving by external way
18. Charging time count & alarm		18. Production data statistics
19. Screw & Barrel (Anti Wear)		19. Alarming & History save
		20. Log history save
		21. I/O circuit display
		22. Shot data save (Internal 1,000 / External device)
Option		
01. Heater Disconnection check device	01. Rotating Core Circuit	01. Hydraulic Auto-Clamp unit
02. Hopper Slide (L/M)	02. Safety Foot-board (Below 700ton)	02. Anchor-bolt set (Clamping unit)
03. Hopper Ladder & Stand	03. Core & Ejector on Fly	03. Heater Insulation Band
04. Screw & Barrel (Nitrided barrel)	04. Daylight Extension	04. Automatic Grease Lubrication (Injection unit)
05. Screw & Barrel (Anti Wear & Corrosive)	05. Core-Back Mode	05. Robot Interface (EM12, EM67, EM67.1, SPI)
06. Valve Gate Circuit & Connector (Interior type)	06. Core Pressure release Circuit (Automatic)	06. CMS (Central Monitoring System)
07. Hydraulic Valve Gate Block (Interior type)	07. Core Pressure release Circuit (Manual)	07. AVR (Automatic Voltage Regulator) on Electric Panel
08. Pneumatic Valve Gate Block (Interior type)	08. Product Chute	08. UPS (Uninterrentable Power Supply) on Electric Panel
09. Hydraulic Valve Gate Device (External device)	09. Automatic Tie-bar Retraction	09. Dosing unit Interface (for Masterbatch)
10. Nozzle cylinders equipped with Potentiometers	10. Hydraulic Core Check Valve	10. Gas Injection Interface
11. Charging on Fly (Pump type)	11. Hydraulic Core Interlock Connector (EM13, WJ Standard)	11. Steam Injection Interface
12. Charging on Fly (AC Motor)	12. Hydraulic Core Puller (2~8 Stages)	12. External Temperature Display (F/P)
13. Shut-off Nozzle (Pneumatic, Hydraulic, Spring)	13. Mold ring on Moving-Platen	13. Interior type Hot Runner Controller (EM13, WJ Standard)
14. Customized Design Screw (SB, Mixing, Coating)	14. Spring type Ejector retraction	
	15. Ejector Check Valve	
	16. Ejector Interlock Connector (WJ Standard, EM13)	
	17. Ejector Forward / Backward External switch	
	18. Mold Insulation Plate	
	19. Pneumatic Core Puller (1-7 Stages)	


SPEED CLUB

Customer Service

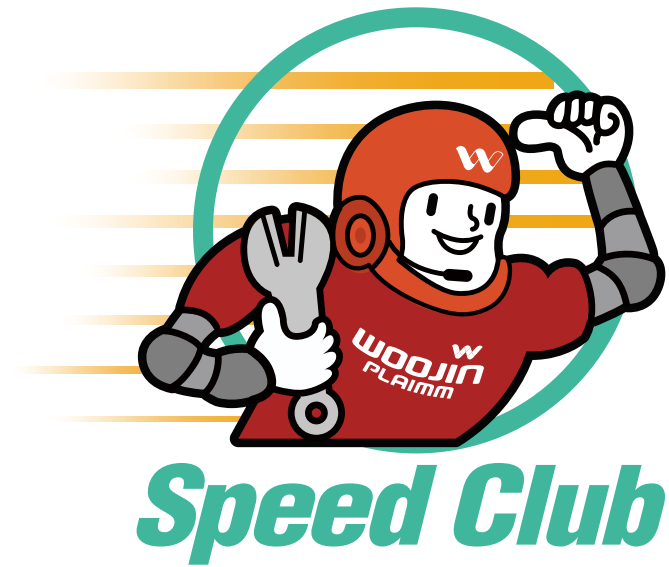

- 1 24-Hour On-Site Support
- 2 Dedicated B/S Team
- 3 Mobile App Support
- 4 Extended Parts Warranty

- 1 Expert Technical Staff
 - Over 10 Years of Experience in Injection Molding (Optimization / Foaming / Trial Injection)
- 2 Technical Research Team
 - Control technology and mechanical design personnel available for ongoing support
- 3 Auxiliary Facility Support
 - Deployment of Skilled Technicians and Consulting Staff

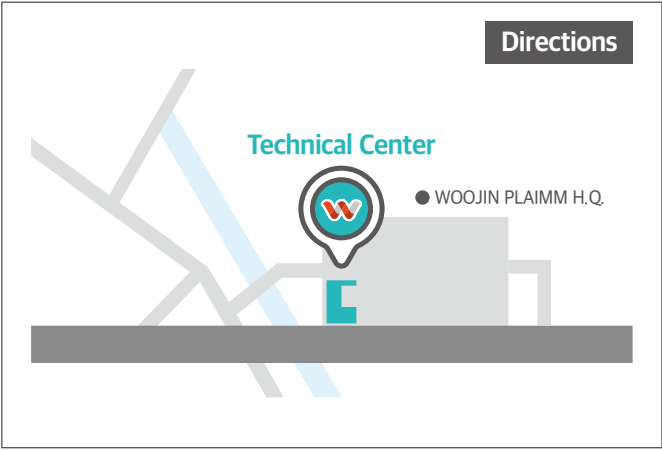

WOOJIN PLAIMM Technical Center delivers the best results to our customers through strategic consulting and technical knowledge sharing.



GLOBAL NETWORK



WOOJIN PLAIMM H.Q.

100, Woojinplaimm-ro, Jangan-myeon, Boeun-gun, Chungcheongbuk-do, Republic of Korea (28913)

Tel. +82 43-540-9000 Fax. +82 43-543-1420 E-mail. info@wjpim.com

SISTER COMPANIES

Austria Inc.	office@woojin.at	U.S.A Inc.	us@wjpim.com	Mexico Inc.	mx@wjpim.com	China Inc.	cn@wjpim.com
Vienna	T. +43-2256-20413	Chicago	T. +1-847-457-1916	Monterrey	T. +52-81-4452-0851	Ningbo	T. +86-574-8680-6088
		Atlanta	T. +1-224-500-5085	Queretaro	T. +52-81-1555-4286	Guangdong	T. +86-135-4938-2580
		Detroit	T. +1-334-332-8597	Tijuana	T. +52-81-1555-4224	Suzhou	T. +86-186-6787-5052

BRANCH OFFICE

Türkiye	office@woojin.at	Slovakia	sk@wjpim.com	Poland	ploffice@wjpim.com	Russia	ru@wjpim.com
Istanbul	T. +90-216-290-1483	Zilina	T. +421-903-207-420	Katowice	T. +48-513-211-177	Moscow	T. +7-495-245-0073
Thailand	th@wjpim.com	India	india1@wjpim.com	Malaysia	my@wjpim.com	Indonesia	id@wjpim.com
Bangkok	T. +66-2-745-4746	Chennai	T. +91-77081-80333	Kuala Lumpur	T. +60-3-7887-0590	Jakarta	T. +62-21-8370-1281
Chonburi	T. +66-33-138-848	Anantapur	T. +91-77081-54222	Johor Bahru	T. +60-7-2121-322	Cikarang	T. +62-21-8977-4613
Vietnam	vn@wjpim.com	Japan	jp@wjpim.com	Bangladesh	bd.arif@wjpim.com	Philippines	philippines2@wjpim.com
Bacninh	T. +84-22-2390-6797	Nagoya	T. +81-80-1249-1753	Dhaka	T. +880-19-2563-7935	Philippines	T. +63-49-542-5722
Hochiminh	T. +84-28-3772-0028						





HOME PAGE



YOUTUBE



CopyRight©2026, WOOJIN PLAIMM Co.,Ltd.

- ※ The copyright of this catalog belongs to WOOJIN PLAIMM Co., Ltd. Unauthorized use may result in legal liability under copyright law.
- ※ Product images and specifications are subject to change without prior notice for quality improvement.
- ※ Content updated as of August 1, 2026.

Korea No.1 IMM Manufacturer

WOOJIN PLAIMM Co., Ltd. | 100, Woojinplaimm-ro, Jangan-myeon, Boeun-gun, Chungcheongbuk-do, Republic of Korea
T. +82 43-540-9000 F. +82 43-543-1420 E. info@wjpim.com

