


ENGLISH

MULTI SERIES

Multi-Color Hybrid Series

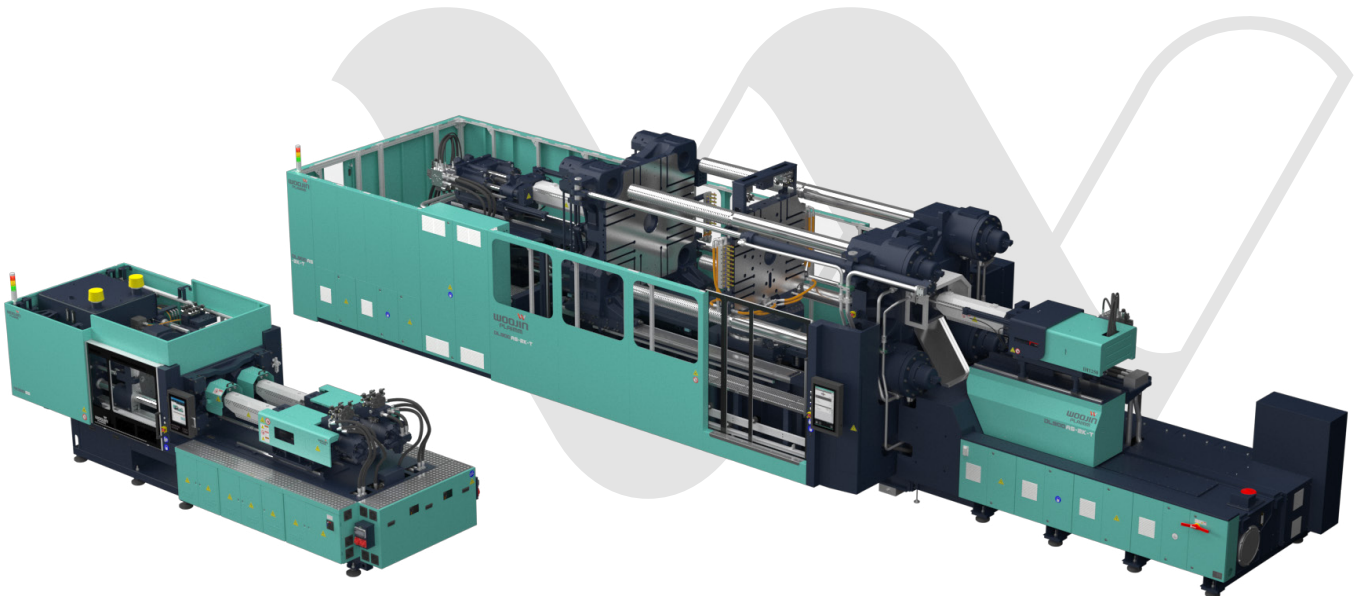


WOOJIN
PLAIMM

OVERVIEW

INC-GS

Multi-Color Energy-Saving Hybrid Series

An injection molding machine that effectively improves productivity by reducing assembly and post-processing steps in the production of complex molded products

(130~400Ton)




Hybrid System
(Servo Motor)



Faster
Cycle Time



Multi-Color
Dual Injection

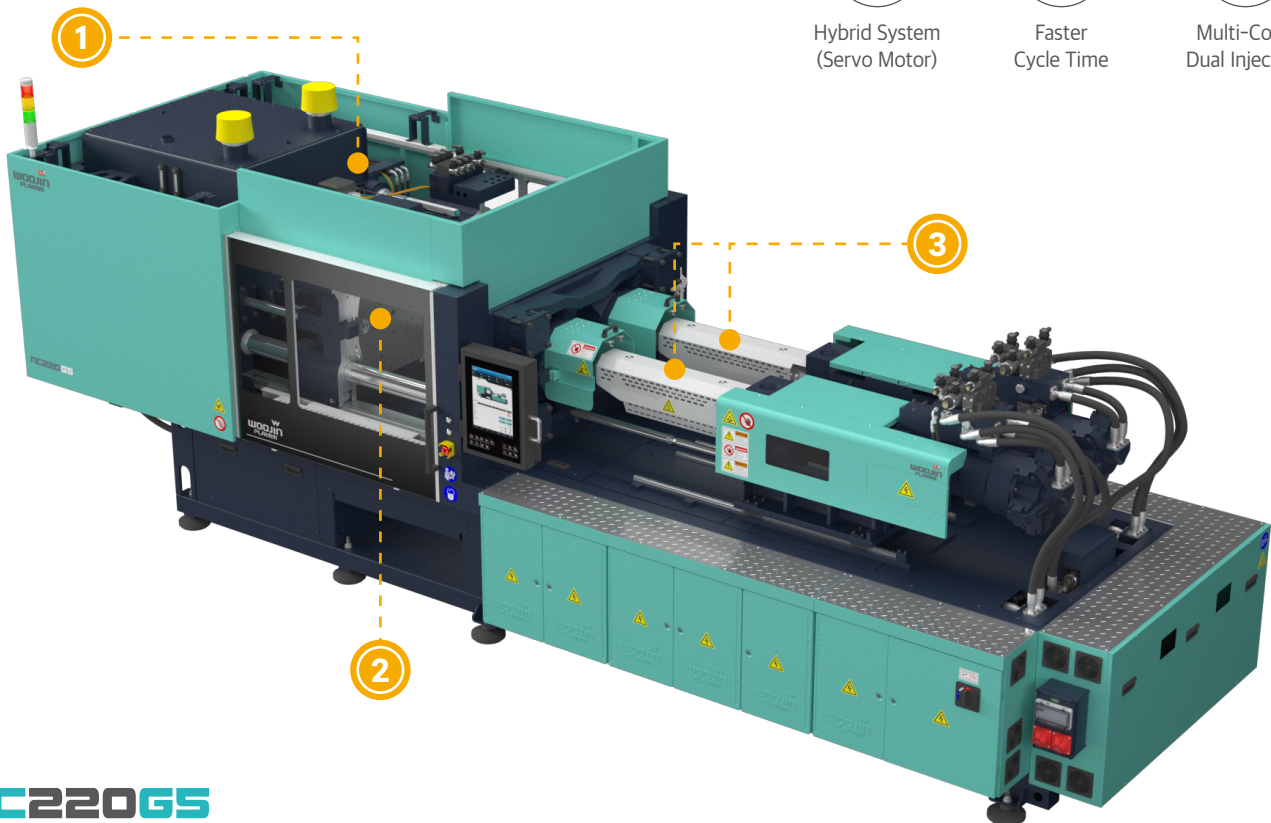

NC220GS

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

1 Wide Tie-Bar Spacing

- | Two booster cylinder structure enables wider tie-bar spacing
- | Improved platen structure allows for a broader range of mold selection

2 NC-Model Dedicated Turn table

- | High-precision turntable structure optimized for multi-color dedicated mold rotation
- | Multi-component rotary system that achieves both precision and productivity

3 Dual Horizontal Injection Unit


- | 2K dual injection enables the molding of high-function, high-value products
- | Provides an integrated molding solution that eliminates assembly processes

FEATURES

DUAL INJECTION OPTIMIZATION



1 Use of Dual Booster Cylinders

- | The hydraulic cylinders are positioned at the center of the two molds, enabling precise maintenance of average cavity pressure during injection molding
- | Dual transfer cylinders increase mold opening/closing speed, improving mold opening position accuracy

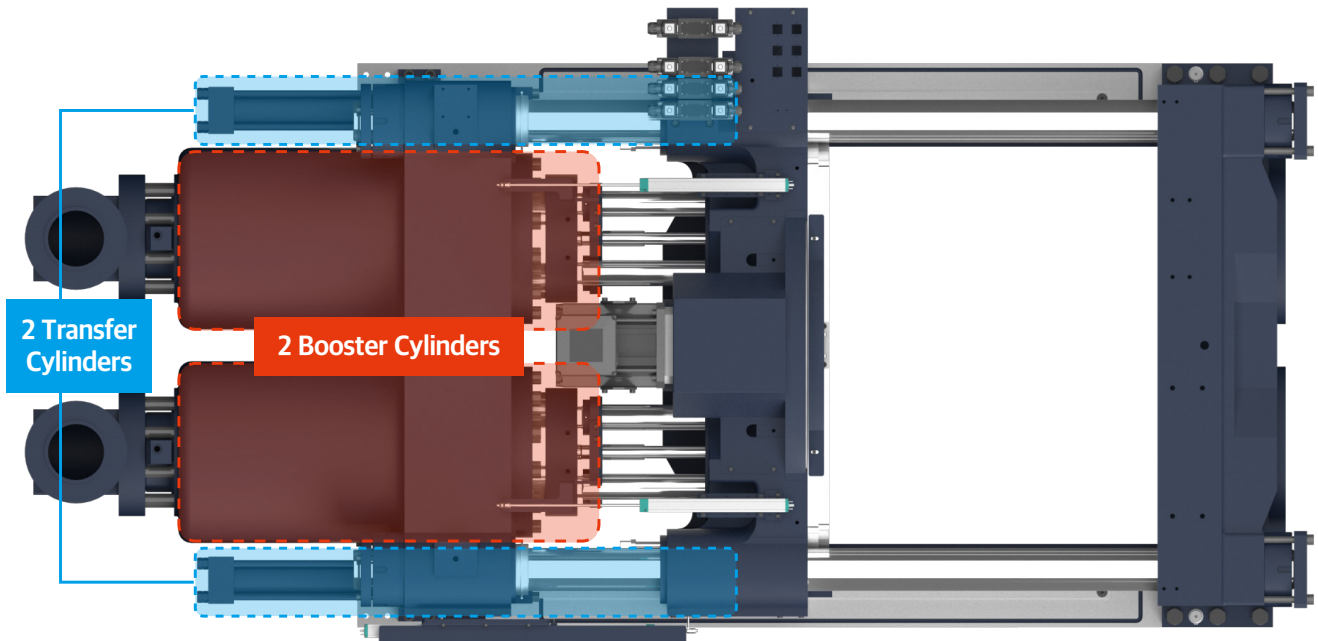

2 Equipped with a Dedicated Servo Motor for Mold Rotation

- | Fast forward and reverse rotation of the movable platen rotary table
- | Precise servo motor positioning control improves productivity and enables high-precision molding

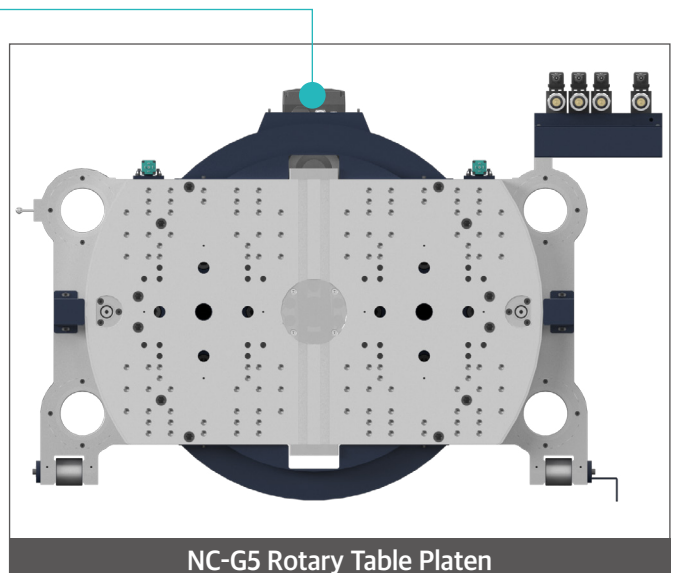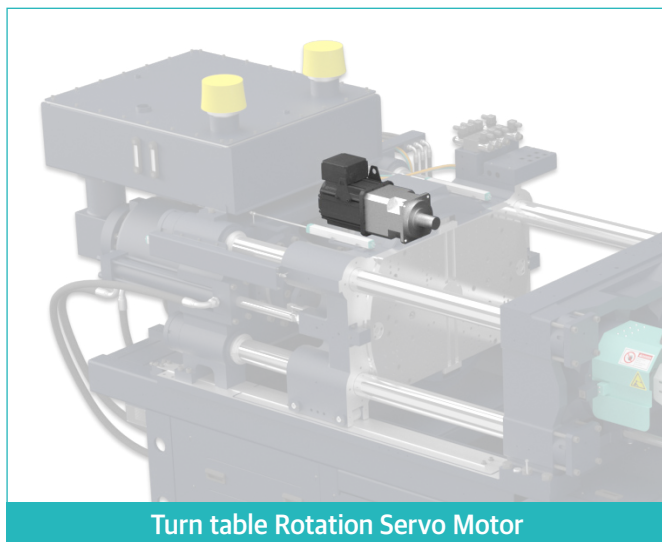


3 Equipped with Locking Cylinder and Proximity Sensor

- | Installed at the movable platen rotary section to improve rotational position control
- | With two molds mounted, optimized special center bearings and sliding parts ensure stable rotation

FEATURES

Specialized Injection Unit

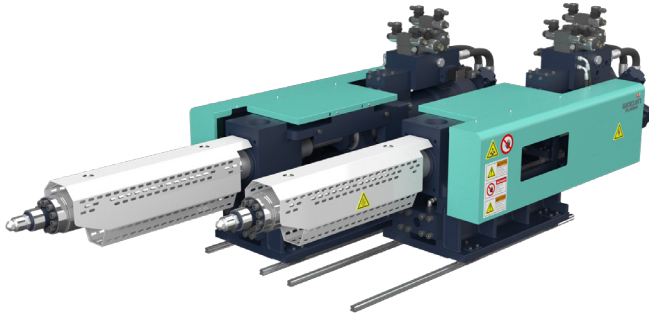

1 Dual Horizontal Injection Units

- | Injection units, screw sizes, and control settings can be independently configured according to product characteristics and colors
- | Independent control of each injection unit enables easy and precise control tailored to product requirements


HIGH-EFFICIENCY HYDRAULIC SYSTEM

1 Reduction in Energy and Cooling Water Consumption

- | The servo pump system reduces idle operation, saving energy and cooling water


2 Oil Tank Circulation System

- | Cooling and filtration functions are independently configured to maintain consistent temperature and cleanliness
- | Structure ensures no resistance to filters and coolers during machine operation
- | Prevents hydraulic component damage and oil leakage caused by oil temperature rise

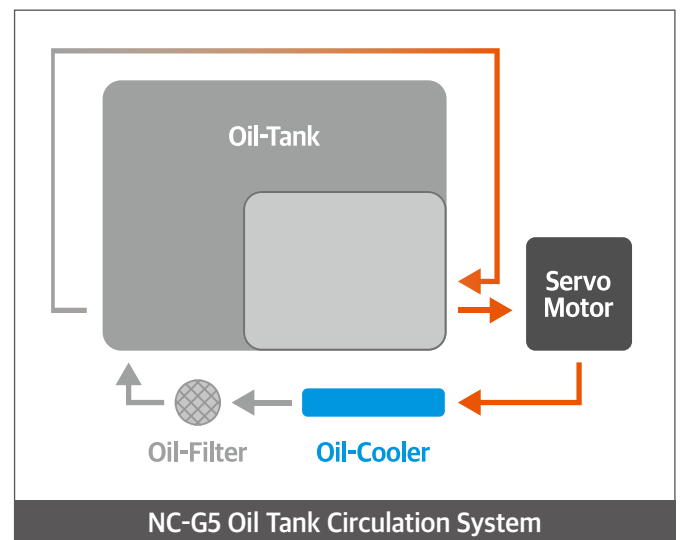

3 Hydraulic Block & Valves

- | Equipped with Bosch Rexroth (Made in Germany) valves
- | Precise plasticization achieved through proportional back pressure control

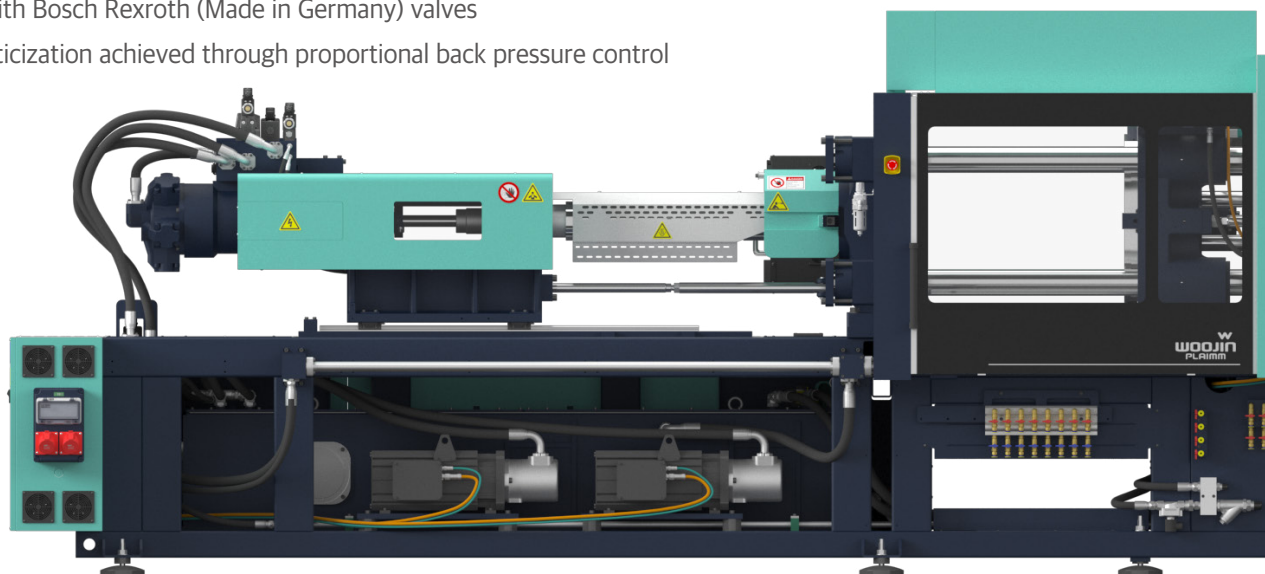



OVERVIEW

ITE-NC

Multi-Color Energy-Saving Electric Series



IMM Promotion

An injection molding machine that controls all operations with servo motors and enables high-speed production of complex molded products

(150~250Ton)



Energy-Saving
(Full-Electric)




Faster
Cycle Time



Independent
Axis Control



Multi-Color
Dual Injection

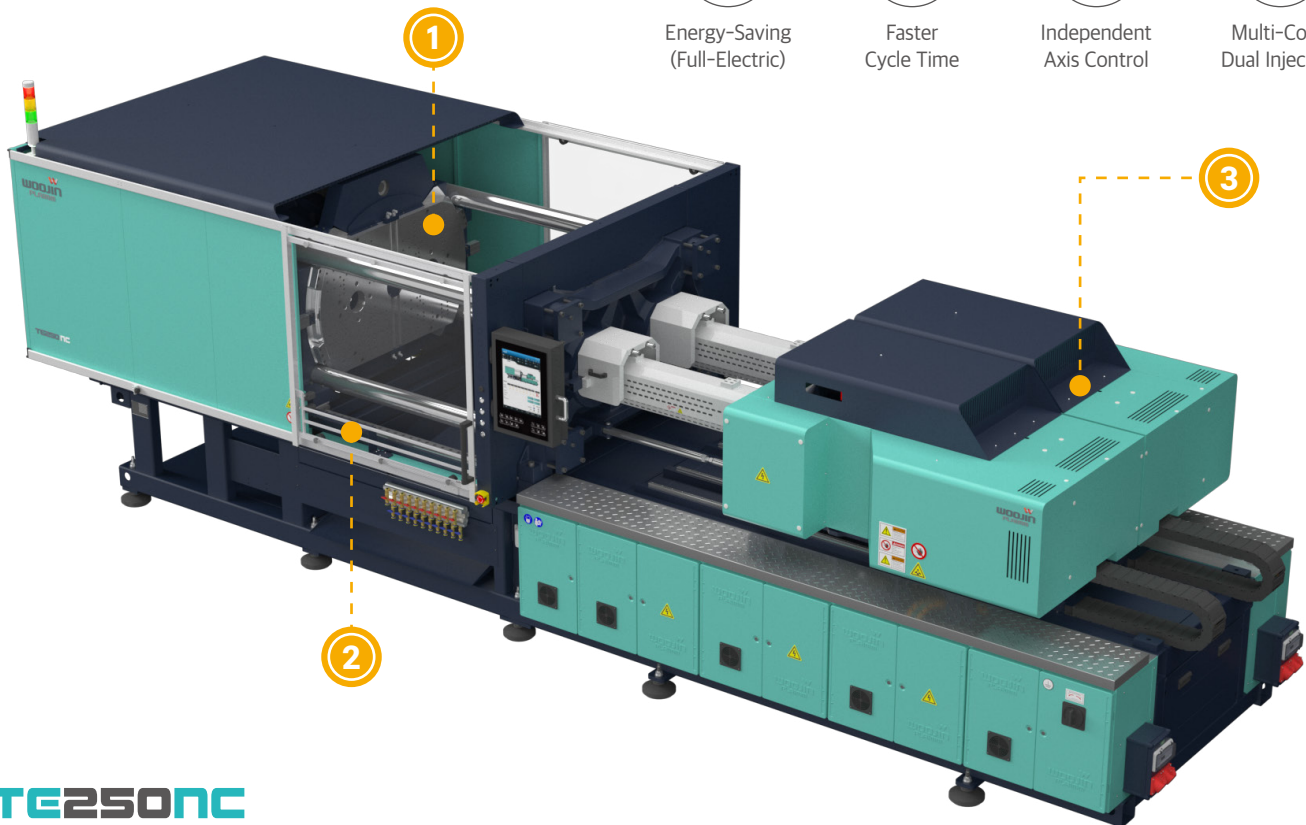

TE250NC

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

1 NC-Model Dedicated Turn table

- | High-precision turntable structure optimized for multi-color dedicated mold rotation
- | Multi-component rotary system that achieves both precision and productivity

2 Movable Platen with L/M Guide

- | Lower friction compared to tie-bar bush systems
- | Improved positioning accuracy (from 0.1 mm to 0.01 mm)
- | Faster acceleration reduces mold opening/closing cycle time

3 Dual Horizontal Injection Unit



- | 2K dual injection enables the molding of high-function, high-value products
- | Provides an integrated molding solution that eliminates assembly processes

FEATURES

NEW CLAMPING UNIT STRUCTURE

1 Center-Press Platen Design

- | Minimizes mold deformation during mold closing to improve molding precision and extend mold life
- | Maintains uniform surface pressure inside the mold to prevent flash
- | Uniform clamping force distribution enables operation with lower clamping force

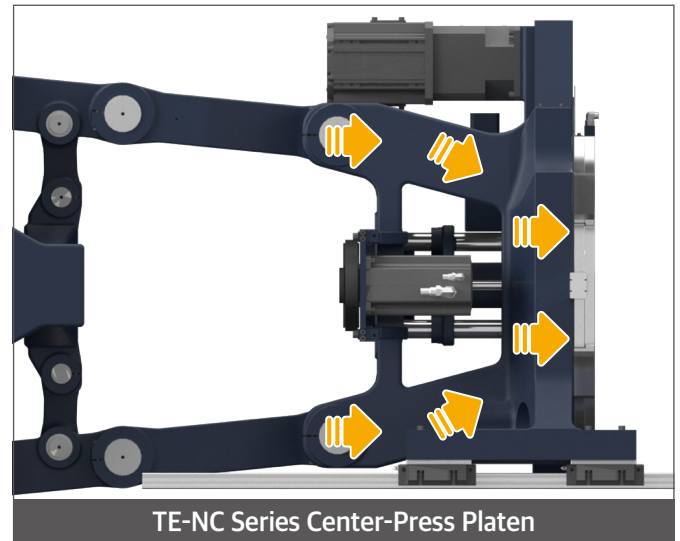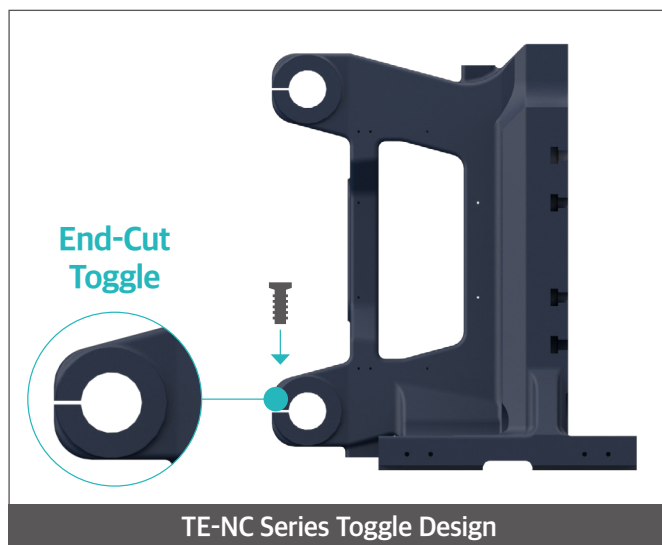


2 End-Cut NEW Toggle Mechanism

- | Approximately 30% improvement in clamping force amplification, increasing servo motor efficiency
- | Optimized design suppresses platen torsional stress during high-speed mold opening and closing for stable operation
- | Clamp-type toggle pin fixing structure enhances durability


3 Clean Tie bar

- | Tie-bar bush eliminated by applying L/M guide (no grease injection required)
- | Reduced friction resistance caused by tie-bar bush
- | Improved tie-bar cleanliness and reduced grease consumption

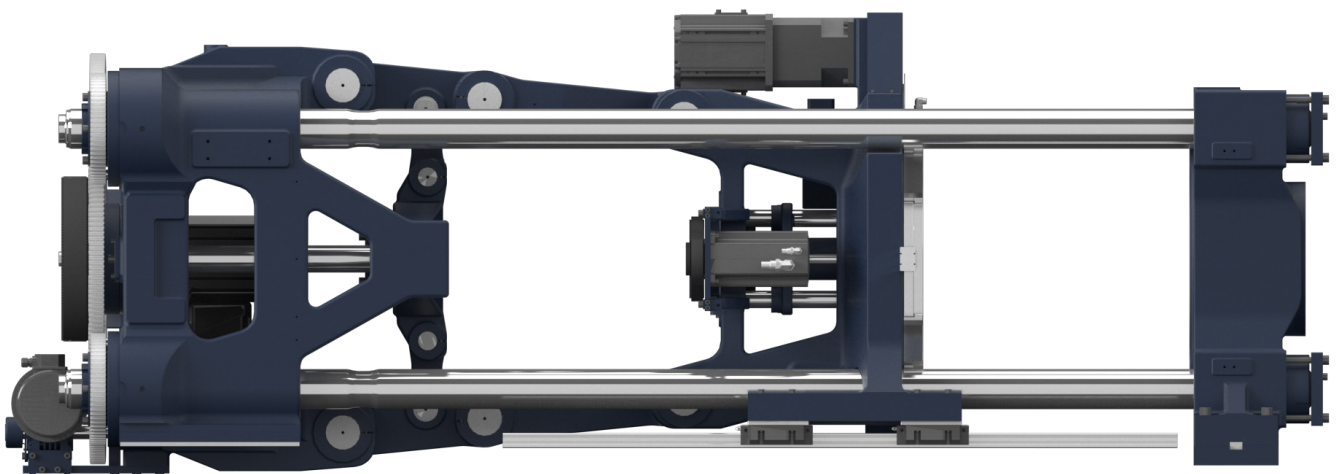

FEATURES


DUAL INJECTION OPTIMIZATION

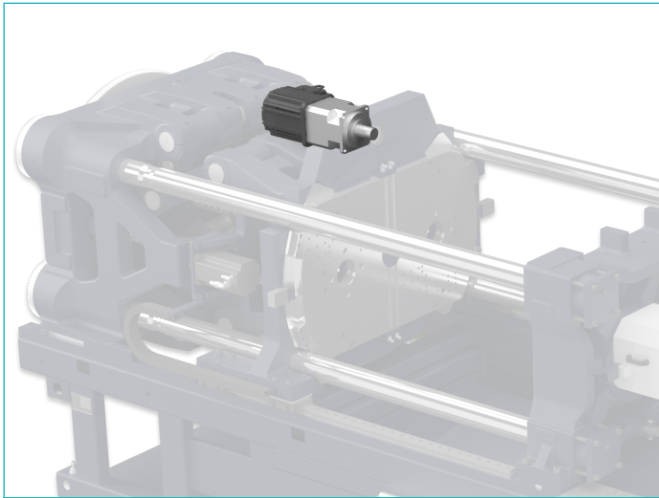

Turn table Rotation Servo Motor

1 Equipped with a Dedicated Servo Motor for Mold Rotation

- | Fast forward and reverse rotation of the movable platen rotary table
- | Precise servo motor positioning control improves productivity and enables high-precision molding

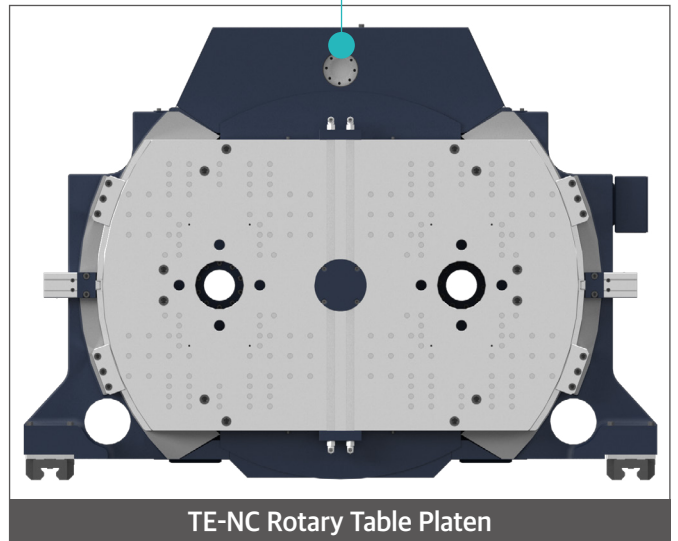


TE-NC Rotary Table Platen

2 Equipped with Turn table

- | Expanded turntable and mold-weight-aware design increase the range of mold selection
- | Servo-driven movable platen rotary section enables fast and precise positioning, reducing cycle time
- | Optimized center axis with special bearings and sliding components ensures stable turntable rotation
- | Platen design supports mold cores and cooling, providing enhanced convenience

Specialized Injection Unit

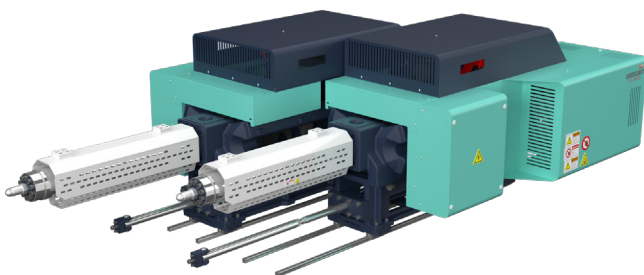

1 Dual Horizontal Injection Units

- | Primary and secondary injection units have independently configured screw and control settings, enabling separate or simultaneous operation
- | Two horizontal injection units can be configured according to product characteristics and colors

2 High-Rigidity Integrated Injection Unit

- | The injection housing and injection ball screw are manufactured as a single casting
- | Minimal accumulated tolerance between the screw and the injection drive allows easy position and pressure control during injection and metering



SPECIFICATIONS

NC-G5 | TE-NC

MODEL		NC130G5			NC220G5			NC400G5		
Injection Unit		IC240			IC510			IC610		
Screw & Barrel type		S	O	A	S	O	A	S	O	A
Screw diameter	mm	25	28	32	40	45	50	40	45	50
Injection pressure	kg/cm²	3241	2584	1978	2242	1772	1435	2689	2125	1721
	Mpa	317	253	193	219	173	140	264	208	169
Theoretical injection volume	cm³	74	92	121	226	286	353	226	286	353
Shot weight (PS)	g	67	84	110	206	261	322	206	261	322
Injection rate	cm³/s	49	61	80	112	142	176	195	246	304
Screw stroke	mm	150			180			180		
Injection speed	mm/s	99			89			155		
Plasticizing capacity (PS)	kg/h	17	23	30	67	90	122	74	99	133
Screw rotation speed	rpm	237			237			260		
Clamping Unit										
Clamping force	ton(kN)	130(1274)			220(2156)			400(3922)		
Distance between tie-bar (H×V)	mm	700 x 300			950 x 360			1120 x 680		
Platen dimension (H×V)	mm	920 x 530			1220 x 630			1385 x 1040		
Max. mold size (H×V)	mm	(250 x 360) x 2			(400 x 500) x 2			(500 x 700) x 2		
Daylight	mm	450			520			800		
Rotary Table Size	Ø	735			1030			1320		
Max. Daylight	mm	620			770			1100		
Min. mold height	mm	170			250			300		
Ejector force	ton(kN)	3.3			3.3			5.6		
Ejector stroke	mm	114			178			190		
General										
Heater capacity	kW	12.6			24.2			24.2		
Motor capacity	kW	36.4(18.2+18.2)			56.6(28.3+28.3)			88(44+44)		
Total electric power capacity	kW	49.0			80.8			112.2		
Hydraulic oil tank capacity	L	360			700			1175		
Machine weight	ton	6.9			11.9			21		
Machine dimension (L×W×H)	m	5.2 x 1.7 x 2.1			6.2 x 2.0 x 2.4			7.3 x 2.4 x 2.7		
Cooling water consumption	L/min	40			65			65		

01. Theoretical injection volume: cross section of screw*screw stroke.
 02. The minimum mold size must be at least 70% of the tie bar distance.
 03. The specifications might be changed without any prior notice.




04. The metering distance is recommended in the range of 1 to 3 times of screw diameter.
 05. Machine dimensions may vary when the injection unit moves UP or DOWN.

MODEL		TE150NC			TE250NC		
Injection Unit		IE180			IE370		
Screw & Barrel type		O	A	B	O	A	B
Screw diameter	mm	25	28	32	32	36	40
Injection pressure	kg/cm²	2597	2070	1585	2774	2192	1775
	Mpa	255	203	155	272	215	174
Injection holding pressure	kg/cm²	2078	1656	1268	2219	1754	1420
	Mpa	204	162	124	218	172	139
Theoretical injection volume	cm³	69	86	113	145	183	226
Shot weight (PS)	g	63	78	103	132	167	206
Injection rate	cm³/s	98	123	160	141	178	220
Screw stroke	mm	140			180		
Injection speed	mm/s	200			175		
Plasticizing capacity (PS)	kg/h	35	46	72	60	86	117
Screw rotation speed	rpm	400			375		
Clamping Unit							
Clamping force	ton(kN)	150(1471)			250(2452)		
Distance between tie-bar (H×V)	mm	700 x 410			1050 x 570		
Platen dimension (H×V)	mm	890 x 670			1255 x 715		
Max. mold size (H×V)	mm	(260 x 490) x 2			(450 x 550) x 2		
Daylight	mm	400			550		
Max. Daylight	mm	800			1200		
Min. mold height	mm	140			200		
Max. mold height	mm	400			650		
Rotary Table Size	Ø	780			1180		
Ejector force	ton(kN)	2.4			4.3		
Ejector stroke	mm	100			120		
General							
Motor capacity	kW	30.0			40.0		
Heater capacity	kW	12.2	14.0	15.6	17.0	19.8	22.4
Total electric power capacity	kW	42.2	44.0	45.6	57.0	59.8	62.4
Machine weight	ton	10.2			14.8		
Machine dimension (L×W×H)	m	5.5 x 1.9 x 1.9			7.0 x 2.3 x 2.0		

PLATEN DIMENSION


NC-G5

Unit: mm

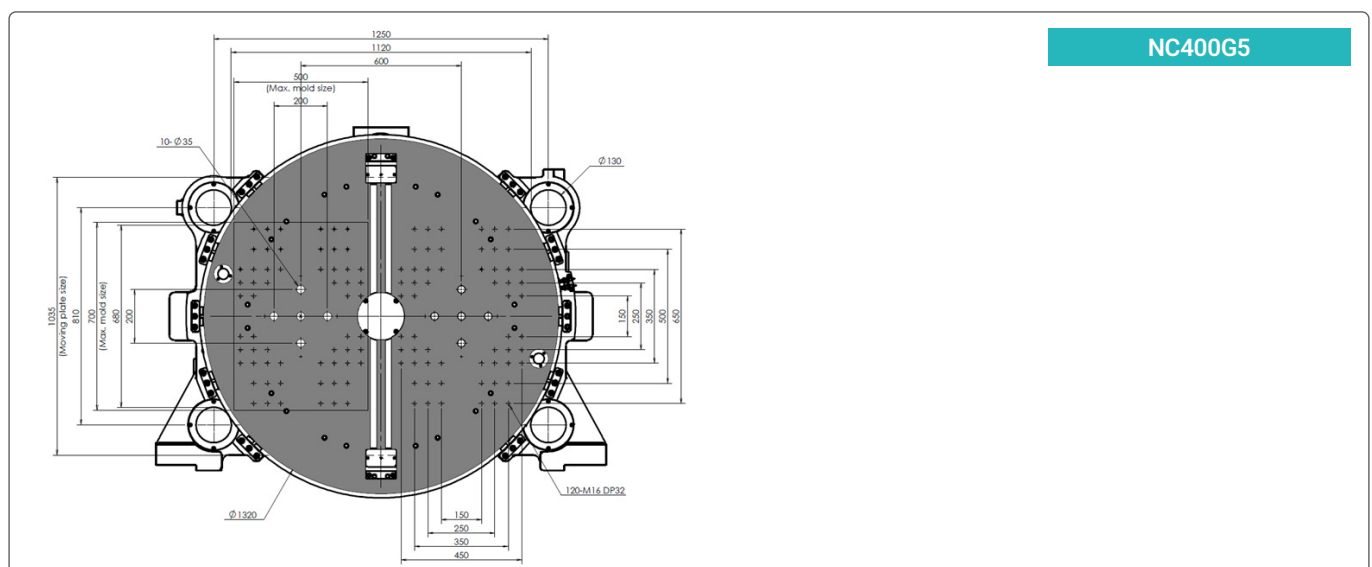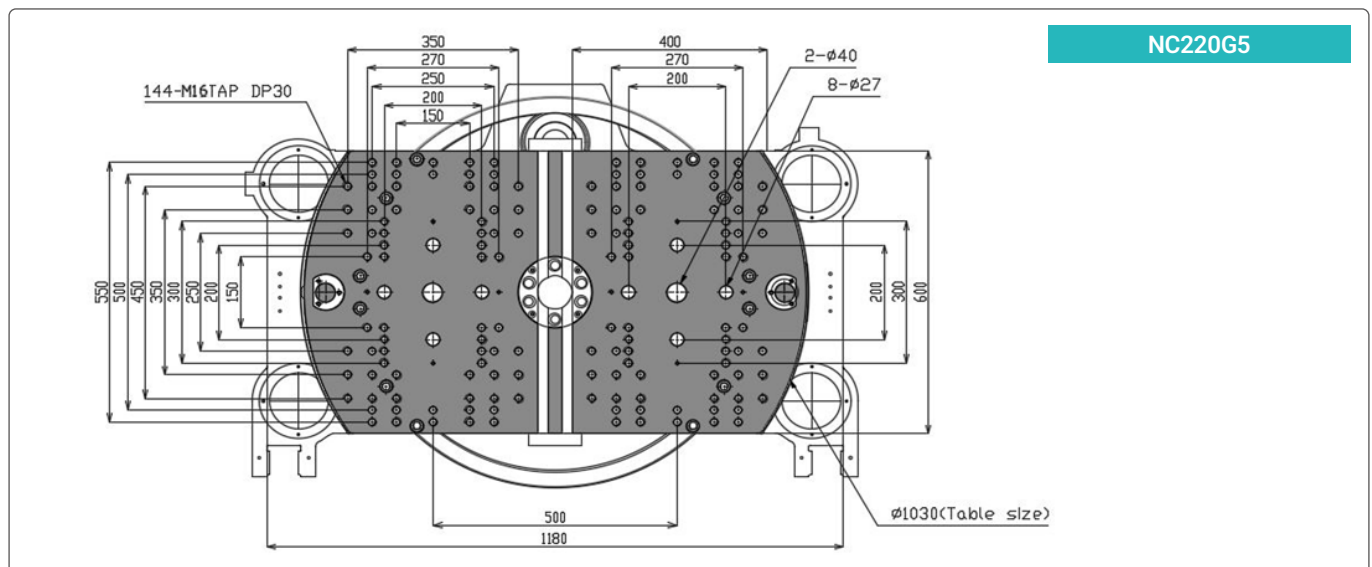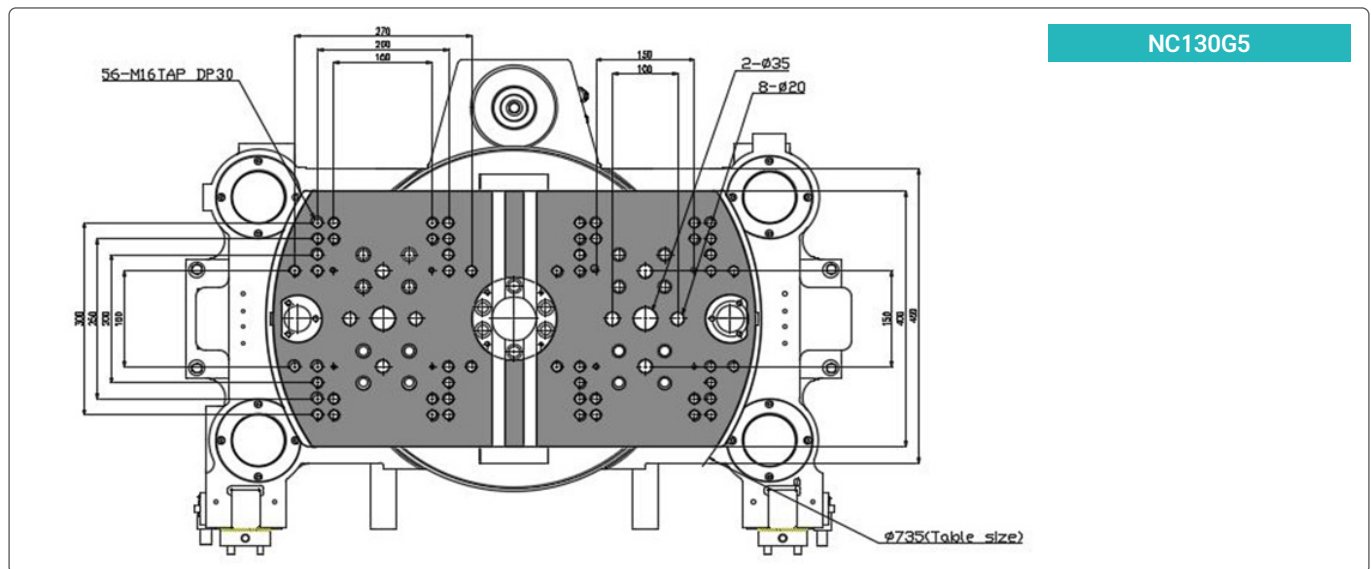


※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

TE150NC

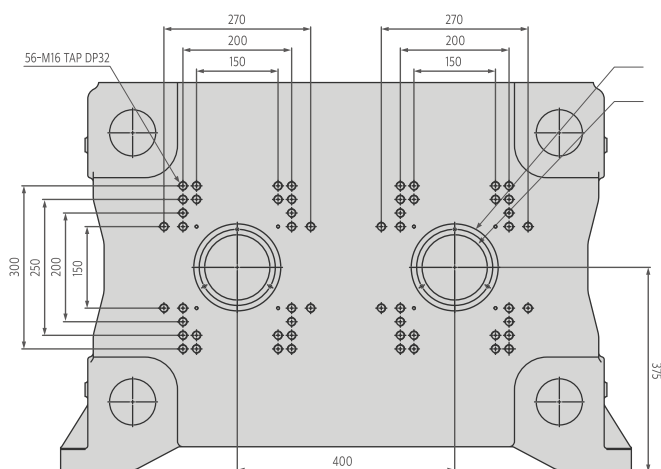


▲ Fixed Platen

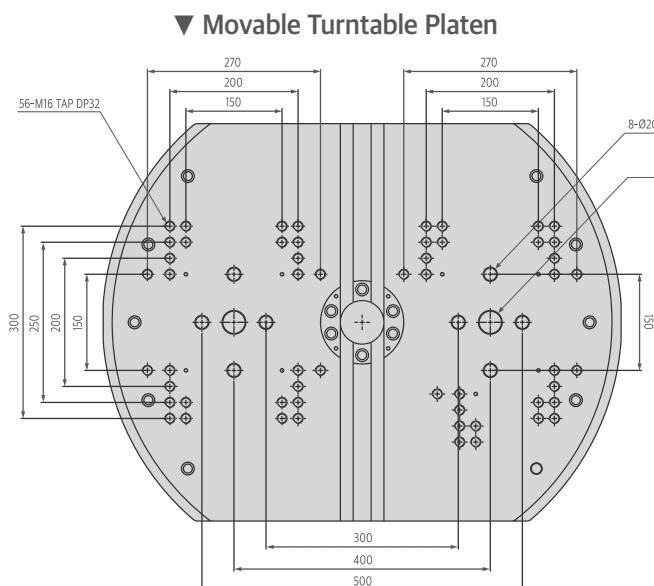


▼ Movable Turntable Platen

TE250NC

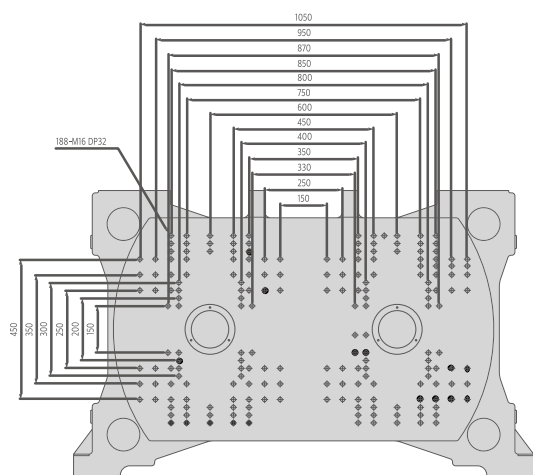

▲ Fixed Platen

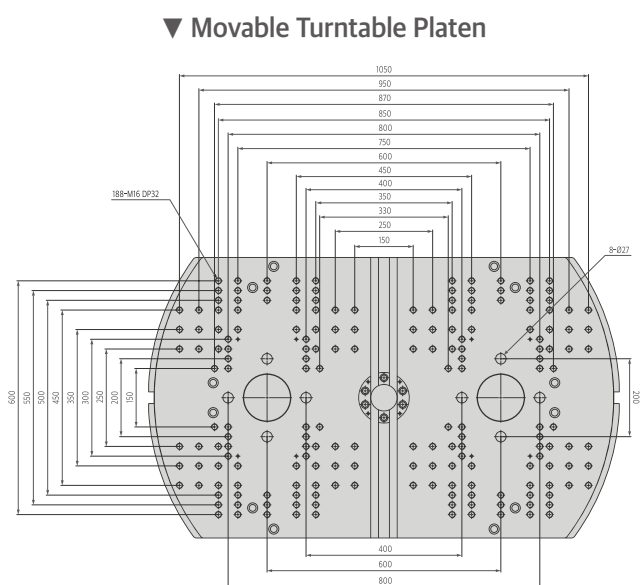

▼ Movable Turntable Platen

NC-GS

NC130G5


NC220G5



NC400G5




WOOJIN PLAIMM MULTI Series Catalog

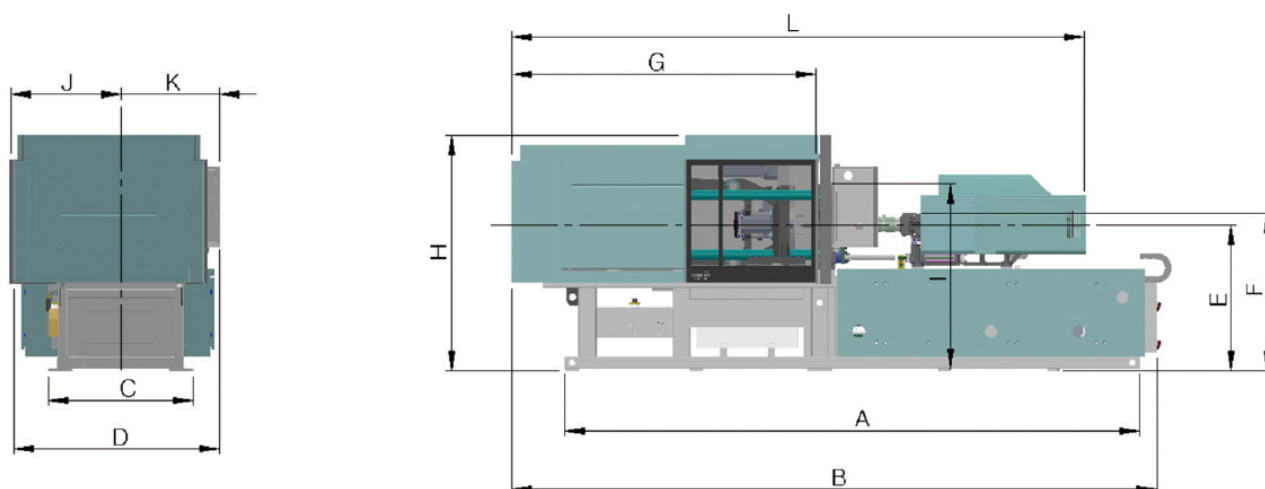


Machine Dimension

Unit: mm	A	B	C	D	E	F	G	H	I	J	K	L
TE150NC	4800	5470	1210	1817	1165	1265	2506	1853	1505	990	827	5108
TE250NC	6272	6926	1660	2228	1300	1415	3206	1993	1745	1214	1014	6404


TE150NC

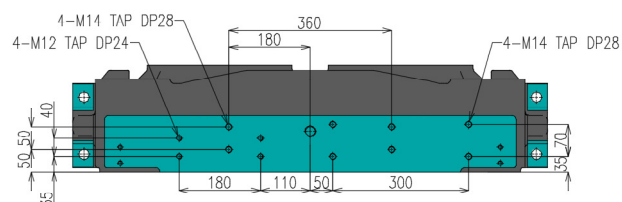

▲ Robot installation position dimension




▲ Hopper installation position dimension




▲ Nozzle dimension


TE250NC

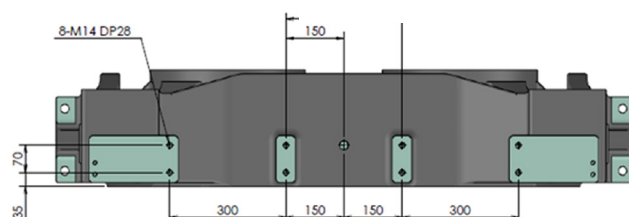

▲ Robot installation position dimension



▲ Hopper installation position dimension



▲ Nozzle dimension

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

OVERVIEW

DL-A5-2K-T

Medium & Large 2K Multi-Injection Dedicated Machine



IMM Promotion

A dedicated dual-color injection molding machine that can directly mold complex-shaped products in a single machine without the need for fusion of two or more different components




Hybrid System
(Servo Motor)



Improved
Dimensional
Accuracy



Faster
Cycle Time

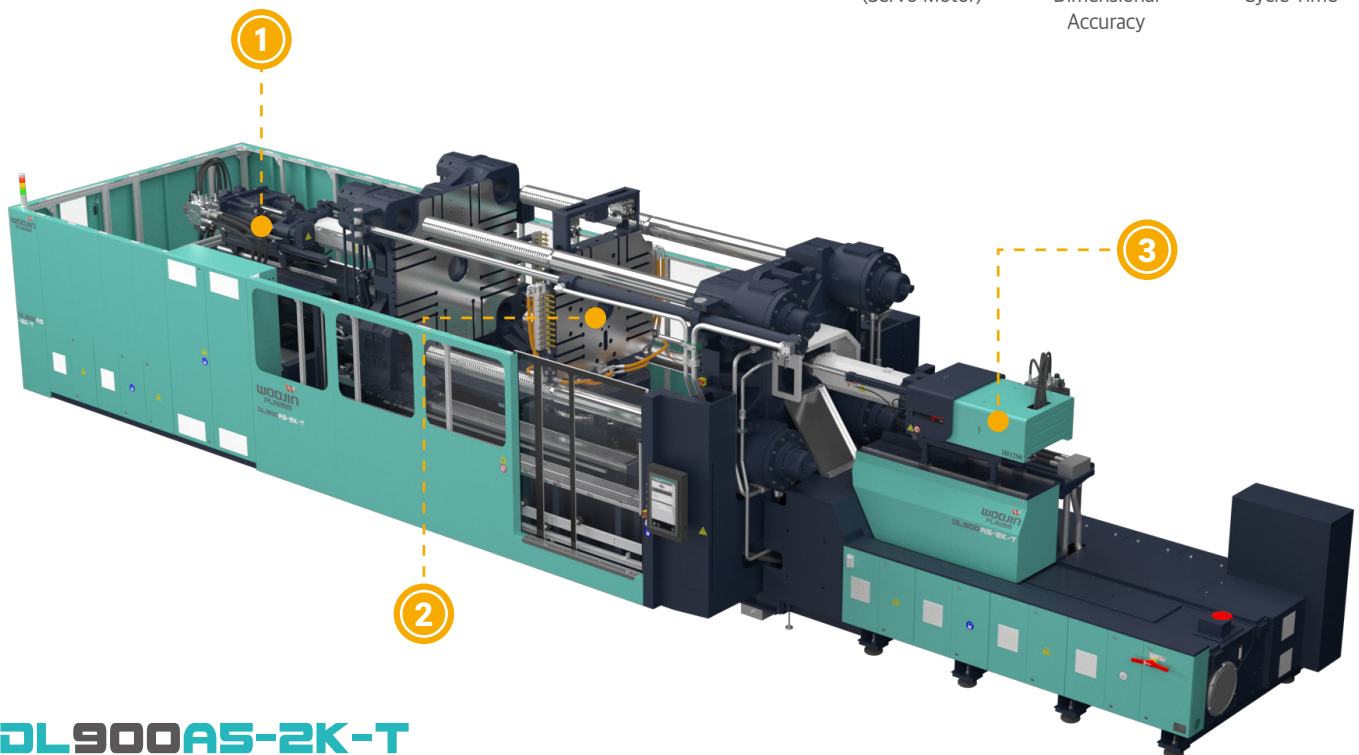

DL900A5-2K-T

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

1 Secondary Injection Unit

- | Connected to the movable platen, enabling responsive injection after mold closing
- | Equipped with a dedicated oil tank and servo pump system to ensure efficient pressure transmission without pressure drop

2 Intermediate Platen (Turn table)

- | High-response proportional valves (Parker, Germany) enable acceleration/deceleration control for mold opening/closing and improve positioning accuracy (± 0.1 mm)
- | Servo motor and drive system ensure precise position control

3 Flexible Injection Unit Selection

- | No limitations in selecting the injection unit, with 100% customer-tailored options
- | Two horizontal injection units can be configured according to product characteristics and colors

FEATURES

01. Theoretical injection volume: cross section of screw*screw stroke.
02. The minimum mold size must be at least 70% of the tie bar distance.
03. The specifications might be changed without any prior notice.
04. The metering distance is recommended in the range of 1 to 3 times of screw diameter.
05. Machine dimensions may vary when the injection unit moves UP or DOWN.

MODEL

DL900A5-2K-T

Injection Unit		IH1250 (1st)	IH1800 (2nd)
Screw & Barrel		A	A
Screw diameter	mm	50	60
Injection pressure	kg/cm ²	2594	2257
	Mpa	260	225
Theoretical injection volume	cm ³	481	806
Shot weight(PS)	g	443	743
Injection rate	cm ³ /s	217	296
Screw stroke	mm	245	285
Injection speed	mm/s	110	105
Plasticizing capacity (PS)	kg/h	182	205
Screw rotation speed	rpm	250	220
Clamping Unit			
Clamping force	ton(kN)	900 (8826)	
Mold opening force	ton(kN)	68 (662)	
Platen dimension (HxV)	mm	1200 x 1120	
Daylight	mm	1720 x 1610	
Max. Daylight	mm	3800 / 1850	
Min. mold height	mm	600	
Max. mold height	mm	1250	
Max. mold weight (Fixed / Middle / Moving / Total)	ton	8.67 / 4.35 / 4.35 / 8.67 / 26.4	
General			
Heater capacity	kW	21.0	23.8
Motor capacity	kW	174.2	
Total electric power capacity	kW	219.0	
Hydraulic oil tank capacity	L	920	600
Machine weight (Clamping+Injection)	ton	54.8 (42.8+5.5+6.5)	
Machine dimension (LxWxH)	m	15 x 3.4 x 3.3	
Cooling water consumption	l/min	180	130

※ Clamping and injection configurations can be customized according to product specifications. Please contact your sales representative for details.


OVERVIEW

DL-A5-2K-V


Horizontal · Vertical Dual Color IMM Equipped with In-House Developed Turntable



IMM Promotion

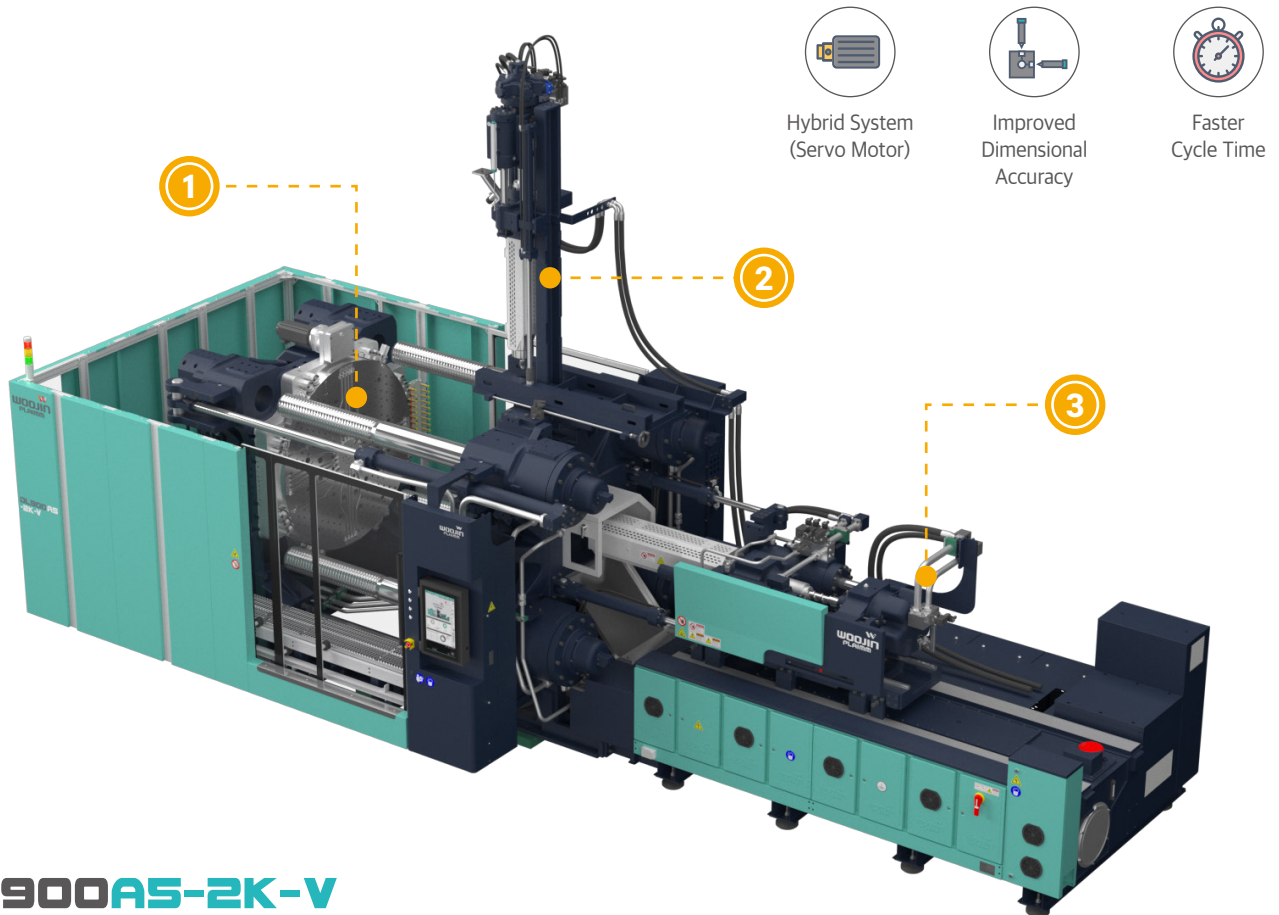

Hybrid System
(Servo Motor)



Improved
Dimensional
Accuracy



Faster
Cycle Time

DL900A5-2K-V

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

1 In-House Turn table

- | Turn table precision control improves dimensional accuracy
- | In-house designed system delivers high ROI relative to investment

2 Vertical Injection Unit for Position Adjustment

- | Injection unit position can be freely adjusted according to mold height and structure
- | Dual nozzle touch cylinders ensure a stable injection position

3 Injection Unit with Proportional Back Pressure Control

- | Proportional back pressure control maintains a consistent melt state
- | Minimizes metering variation, enabling stable processing of engineering plastics

FEATURES

01. Theoretical injection volume: cross section of screw*screw stroke.
02. The minimum mold size must be at least 70% of the tie bar distance.
03. The specifications might be changed without any prior notice.
04. The metering distance is recommended in the range of 1 to 3 times of screw diameter.
05. Machine dimensions may vary when the injection unit moves UP or DOWN.

MODEL

DL900A5-2K-V

Injection Unit		IH2800 (1st)	IHV860 (2nd)
Screw & Barrel		A	A
Screw diameter	mm	70	50
Injection pressure	kg/cm ²	1889	1998
	bar	1852	1959
Theoretical injection volume	cm ³	1482	442
Shot weight(PS)	g	1365	407
Injection rate	cm ³ /s	472	267
Screw stroke	mm	385	225
Injection speed	kg/h	252	102
Plasticizing capacity (PS)	rpm	180	
Nozzle Center Between Distance	mm	250	
Clamping Unit			
Clamping force	ton(kN)	900 (8826)	
Mold opening force	mm	1200 x 1120	
Distance between tie-bar(HxV)	mm	1720 x 1610	
Platen dimension (HxV)	mm	1000 / 1600	
Daylight	mm	2100	
Max. Daylight	mm	500	
Min. mold height	mm	1100	
Ejector force	ton(kN)	26.9 (263.8)	
Ejector stroke	mm	250	
Clamp System	Type	Two Platen Direct Locking	
General			
Heater capacity	kW	20.6	14.1
Motor capacity	kW	130.9	
Total electric power capacity	kW	165.6	
Hydraulic oil tank capacity	L	920	
Machine weight (Clamping+Injection)	ton	42 (35+7)	
Machine dimension (LxWxH)	m	9.2 x 3.4 x 5.1	

OVERVIEW

TL-A5-2K-W

Turn table foaming (Clean-Foam) 2K IMM



IMM Promotion



Hybrid Type
(Servo Motor)



Tie bar-Less
Platen



Paintable
Surface



Faster
Cycle Time



TL300A5-2K-W

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

1 Tie-Barless Clamping Unit

- | The platen area serves as the mold mounting area, allowing larger molds compared to machines of the same class
- | Minimizes robot travel distance and eliminates interference between peripherals and tie-bars, improving cycle time

2 Inclined Injection Unit

- | Compact structure delivers superior productivity relative to layout
- | Enables surface-layer injection suitable for immediate painting

3 Dedicated Foaming Injection Unit

- | Dedicated Super-Foam injection unit for low-pressure micro physical foaming
- | Achieves product lightweighting, cost reduction, and energy savings
- | Forms a foamed core layer with cells smaller than 30 microns

FEATURES

01. Theoretical injection volume: cross section of screw*screw stroke.
02. The minimum mold size must be at least 70% of the tie bar distance.
03. The metering distance is recommended in the range of 1 to 3 times of screw diameter.
04. Machine dimensions may vary when the injection unit moves UP or DOWN.

MODEL

TL300A5-2K-W

Injection Unit		IHV860 (1st)	IHV490 (2nd)
Screw & Barrel type		B	B
Screw diameter	mm	55	45
Injection pressure	kg/cm ²	1610	1536
	Mpa	158	151
Theoretical injection volume	cm ³	535	318
Shot weight (PS)	g	493	293
Injection rate	cm ³ /s	352	231
Screw stroke	mm	225	200
Injection speed	mm/s	148	145
Plasticizing capacity (PS)	kg/h	233	127
Screw rotation speed	rpm	250	300
Clamping Unit			
Clamping force	ton(kN)	300 (2941)	
Platen dimension (H×V)	mm	1120 x 1000	
Daylight	mm	900	
Max. Daylight (With Turntable / Without)	mm	1081 / 1300	
Min. mold height (With Turntable / Without)	mm	181 / 400	
Rotary Table Size	Ø	950	
1st, 2nd Nozzle distance	mm	200	
Ejector force	ton(kN)	9.1 (89.2)	
Ejector stroke (With Turntable / Without)	mm	95 / 200	
General			
Heater capacity	kW	19.6	10.1
Motor capacity	kW	55	30
Total electric power capacity	kW	114.7	
Main Oil Tank Capacity	L	570	
Clamp Oil Tank Capacity	L	380	
Total Oil Tank Capacity	L	950	
Machine weight	ton	20	
Machine dimension (L×W×H)	m	8.0 x 2.0 x 2.7	
Cooling water consumption	l/min	100	


OVERVIEW

TH-A5-3K-VL

Dedicated Machine Optimized for Composite Product Production with a Turntable-Based 3K Process



IMM Promotion

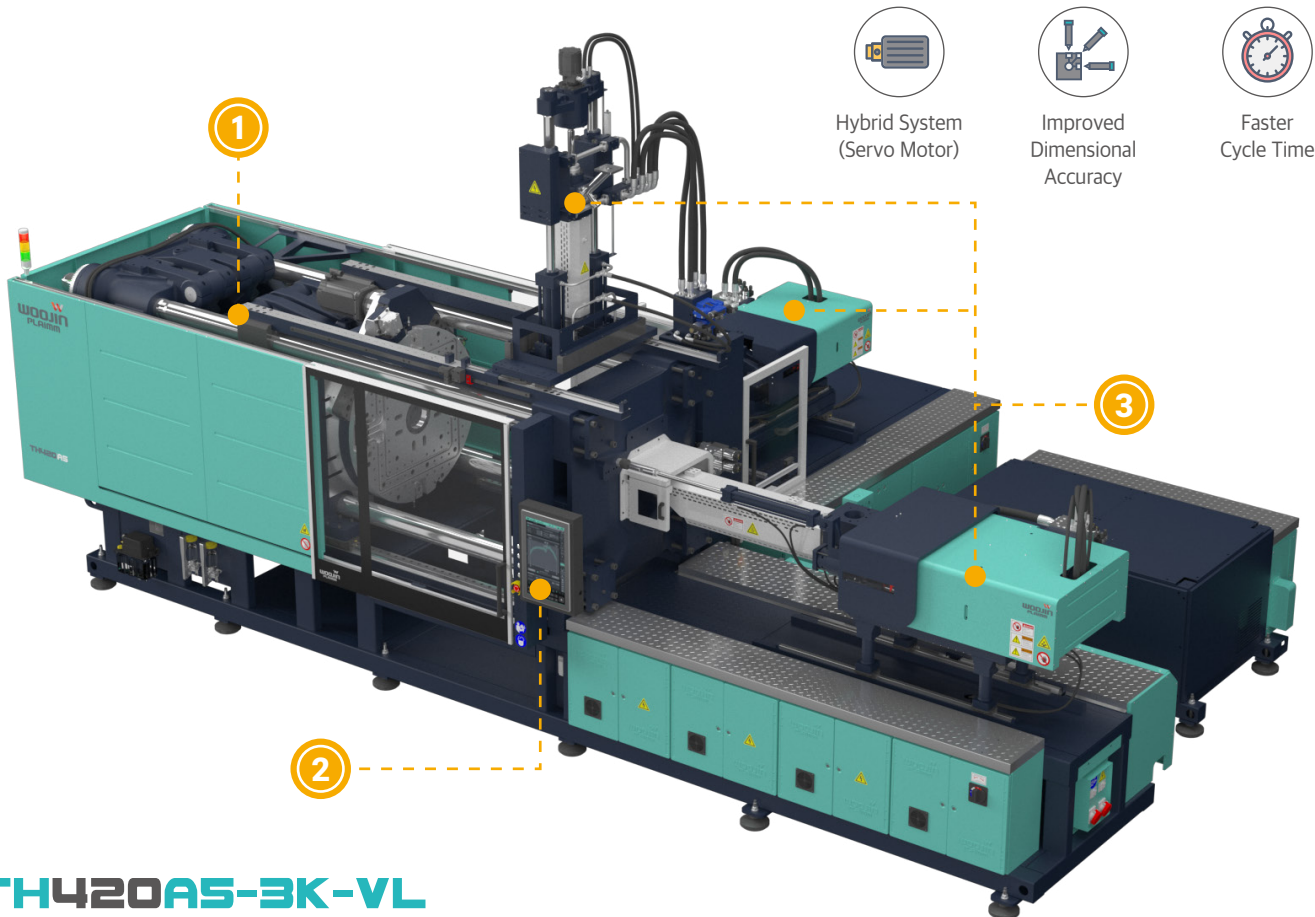

TH420A5-3K-VL

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

1 New Toggle System

- | Balanced New toggle structure minimizes uneven load
- | Maintains stable clamping under any conditions

2 IMC 510 Controller

- | Enables complex process design with smart sequencing
- | Improves composite process quality with Smart Injection Molding (PLAIMM-X) functionality

3 Horizontal + V + L-Type Injection Unit Layout

- | Optimized layout based on product geometry and mold structure
- | Supports sequential and simultaneous injection for improved operational convenience

FEATURES

01. Theoretical injection volume: cross section of screw*screw stroke.
02. The minimum mold size must be at least 70% of the tie bar distance.
03. The specifications might be changed without any prior notice.
04. The metering distance is recommended in the range of 1 to 3 times of screw diameter.
05. Machine dimensions may vary when the injection unit moves UP or DOWN.

MODEL

TH420A5-3K-VL


Injection Unit		IHV1800 (1st)	IH600 (2nd / L-Type)	IH390V (3rd / V-Type)
Screw & Barrel type		A	A	A
Screw diameter	mm	60	40	36
Injection pressure	kg/cm ²	2257	2431	2079
	Mpa	221	238	204
Theoretical injection volume	cm ³	806	251	183
Shot weight (PS)	g	743	232	167
Injection rate	cm ³ /s	296	151	134
Screw stroke	mm	285	200	180
Injection speed	mm/s	105	120	132
Plasticizing capacity (PS)	kg/h	205	94	46
Screw rotation speed	rpm	220	300	200
Clamping Unit				
Clamping force	ton(kN)	420 (4119)		
Distance between tie-bar (H×V)	mm	820 x 820		
Platen dimension (H×V)	mm	1210 x 1140		
Daylight	mm	750		
Max. Daylight	mm	1550		
Min. mold height	mm	350		
Max. mold height	mm	800		
Ejector force	ton(kN)	9.6 (94.2)		
Ejector stroke	mm	210		
General				
Heater capacity	kW	23.8	11.2	8.1
Motor capacity	kW	32.7	15.7	19.8
Total electric power capacity	kW	56.5	26.9	27.9
Hydraulic oil tank capacity	L	400	280	210
Machine weight	ton	-		
Machine dimension (L×W×H)	m	-		
Cooling water consumption	L/min	65	40	40

IMC 510



* The Red Dot Award is a globally prestigious design award, and together with Germany's iF Design Award and the USA's IDEA, it is recognized as one of the world's top three design awards

FEATURES



- Equipped with B&R Controller
- 21-inch Full HD Touch Screen
- User Interface (UI/UX) Optimized for IMM



- Injection process design using Smart Sequence
- Review processes and receive feedback through PLAIMM-X
- Process management analysis and energy monitoring




- Supports OPC-UA (EUROMAP 77)
- Data provided via SQL and CSV
- Peripheral device monitoring and remote support services available




- Check operation sequence with Overview Chain
- View clamping and injection graphs on a single page
- Frequently used functions managed through custom tabs

MAIN PAGE SCREEN CONFIGURATION

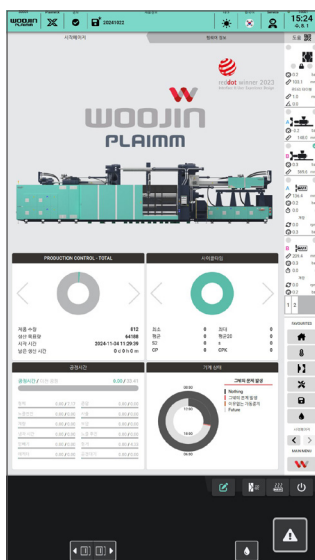


Home

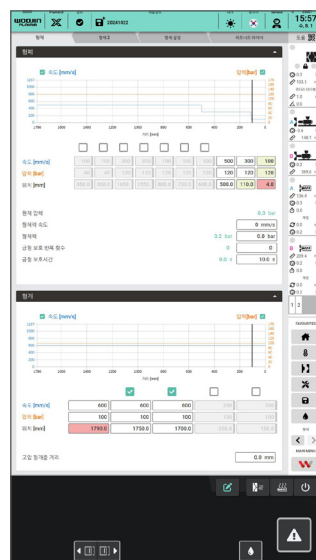

Mold



Injection/Pressure Hold

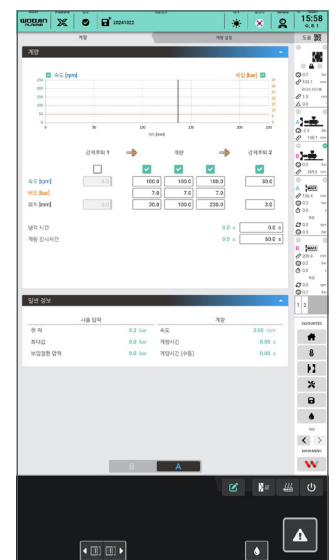


Metering

※ This controller may be changed without prior notice due to optional specifications or software updates.

IMC 710



FEATURES




- UI icons in image-centered pictogram style
- Interface optimized with essential buttons
- Supports multiple languages

SPECIFICATIONS

Display	15-inch (IPS LCD)
Resolution	768 X 1024
Touch Screen	Capacitive
CPU	ARM Cortex-A9 Core 11,500 DMIPS
RAM	DDR3, 1GB
Storage	eMMC 8GB
IP Rating	IP65 (Front) IP20 (Back)

MAIN PAGE SCREEN CONFIGURATION

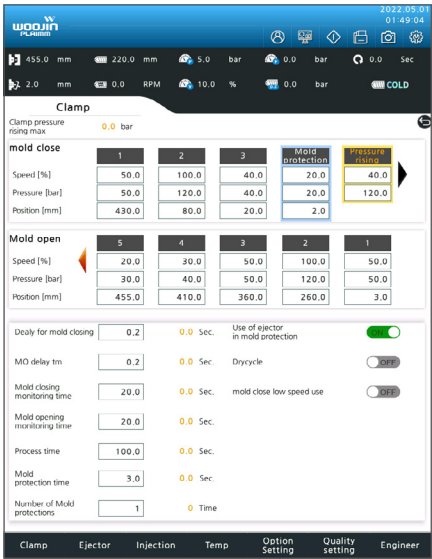

Clamp



Temperature




Machine Information

※ This controller may be changed without prior notice due to optional specifications or software updates.

Injection Unit	Clamping Unit	General
Standard		
01. Single Flight Screw	01. Hydraulic Core puller (Moving platen side, 1 stage)	01. 3 Phase electric outlet (4 ea)
02. Injection valve gate circuit (AC 1 + DC 1)	02. Air blow-off unit (Fixed side 1 + Moving side 1)	02. Standard Maintenance tools
03. PID Heating Control	03. Safety device(for electric & hydraulic)	03. Standard spare part
04. Weekly Heating Timer	04. Automatic Mold thickness adjust mode	04. Leveling pad
05. Cold screw protection mode	05. Mold-Open Speed & Pressure step (5 step)	05. Cooling water distributor
06. Temperature display & Alarm in abnormal Temp.	06. Mold-Close Speed & Pressure step (5 step)	06. Robot interface (Standard)
07. Auto Purging	07. Ejector Speed & Pressure step (3 step)	07. Hydraulic oil purification device
08. Injection Speed & Pressure step (10 step)		08. Hydraulic oil level alarm
09. Holding Speed & Pressure step (5 step)		09. Hydraulic oil temperature check & alarm
10. Charging Speed & Pressure step (4 step)		10. Hydraulic oil heating mode
11. Back Pressure control step (4 step)		11. 3 color alarm light
12. Injection Pressure Graph Display		12. Shot data saving by external way
13. Injection Speed Graph Display		13. Production data statistics
14. Screw RPM Display		14. Alarming & History save
15. Cushion Display & Alarm		15. Log history save
16. Charging time count & alarm		16. I/O circuit display
17. Screw & Barrel (Anti Wear)		17. Shot data save (Internal 1,000 / External device)
Option		
01. Heater Disconnection check device	01. Daylight Extension	01. Steel tray for resin leakage
02. Screw & Barrel (Nitrided barrel)	02. Product Chute	02. Hopper Throat Temperature Control Device
03. Screw & Barrel (Anti Wear & Corrosive)	03. Hydraulic Core Check Valve	03. Heater Insulation Band
04. Valve Gate Circuit & Connector (Interior type)	04. Hydraulic Core Interlock Connector (EM13, WJ Standard)	04. Automatic Grease Lubrication (Clamping unit)
05. Pneumatic Valve Gate Block (Interior type)	05. Spring type Ejector retraction	05. Robot Interface (EM12, EM 67, EM67.1, SPI)
06. Shut-off Nozzle (Pneumatic, Hydraulic, Spring)	06. Ejector Check Valve	06. CMS (Central Monitoring System)
07. Customized Design Screw (SB, Mixing, Coating)	07. Mold Insulation Plate	07. AVR (Automatic Voltage Regulator) on Electric Panel
		08. UPS (Uninterruptable Power Supply) on Electric Panel
		09. Dosing unit Interface (for Masterbatch)
		10. Gas Injection Interface
		11. Steam Injection Interface
		12. Interior type Hot Runner Controller (EM13, WJ Standard)

Injection Unit	Clamping Unit	General
Standard		
01. Single Flight Screw 02. Injection valve gate circuit (AC 1 + DC 1) 03. PID Heating Control 04. Weekly Heating Timer 05. Cold screw protection mode 06. Temperature display & Alarm in abnormal Temp. 07. Auto Purging 08. Injection Speed & Pressure step (10 step) 09. Holding Speed & Pressure step (5 step) 10. Charging Speed & Pressure step (4 step) 11. Back Pressure control step (4 step) 12. Injection Pressure Graph Display 13. Injection Speed Graph Display 14. Screw RPM Display 15. Cushion Display & Alarm 16. Charging time count & alarm 17. Screw & Barrel (Anti Wear)	01. Air blow-off unit (Fixed side 1 + Moving side 1) 02. Safety device(for electric & hydraulic) 03. Automatic Mold thickness adjust mode 04. Mold-Open Speed & Pressure step (5 step) 05. Mold-Close Speed & Pressure step (5 step) 06. Ejector Speed & Pressure step (3 step)	01. Standard Maintenance tools 02. Standard spare part 03. Leveling pad 04. Cooling water distribution 05. Automatic Ball-screw grease lubrication (All parts) 06. Automatic oil lubrication (Toggle) 07. Robot interface (Standard) 08. 3 Phase electric outlet (2 ea) 09. Single Phase electric outlet (1 ea) 10. Hopper throat temperature control device 11. 3 color alarm light 12. Shot data saving by external way 13. Production data statistics 14. Alarming & History save 15. Log history save 16. I/O circuit display 17. Shot data save (Internal 1,000 / External device)
옵션		
01. Heater Disconnection check device 02. Hopper Slide (L/M) 03. Screw & Barrel (Nitrided barrel) 04. Screw & Barrel (Anti Wear & Corrosive) 05. Valve Gate Circuit & Connector (Interior type) 06. Pneumatic Valve Gate Block (Interior type) 07. Shut-off Nozzle (Pneumatic, Hydraulic, Spring) 08. Customized Design Screw (SB, Mixing, Coating)	01. Automatic clamping force measurement mode 02. Daylight Extension 03. Automatic safety Door open/close 04. Product Chute 05. Hydraulic Core Interlock Connector (EM13, WJ Standard) 06. Ejector Interlock Connector (WJ Standard, EM13) 07. Ejector Forward / Backward External switch 08. Mold Insulation Plate 09. Hydraulic Core Device (Fixed, Moving, 1 or 2 stage)	01. Lubricating oil Recycling device 02. Steel tray for resin leakage 03. Heater Insulation Band 04. Robot Interface (EM12, EM67, EM67.1, SPI) 05. CMS (Central Monitoring System) 06. AVR (Automatic Voltage Regulator) on Electric Panel 07. UPS (Uninterruptible Power Supply) on Electric Panel 08. Dosing unit Interface (for Masterbatch) 09. Gas Injection Interface 10. Steam Injection Interface 11. Interior type Hot Runner Controller (EM13, WJ Standard)

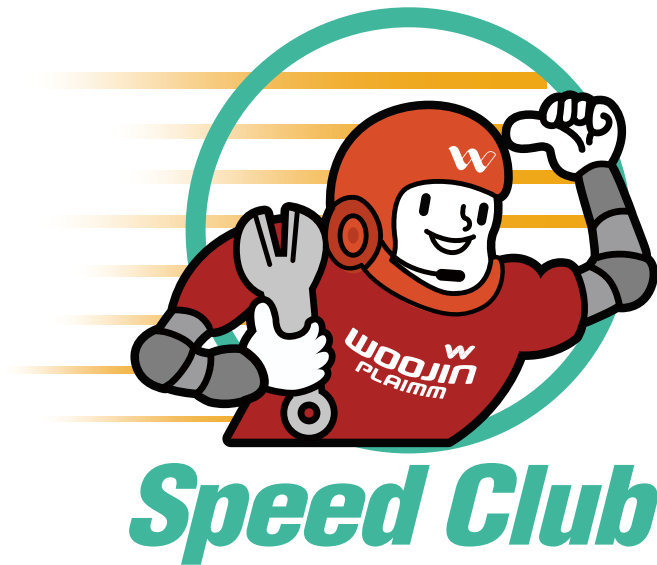

- 1 24-Hour On-Site Support
- 2 Dedicated B/S Team
- 3 Mobile App Support
- 4 Extended Parts Warranty

1 Expert Technical Staff


| Over 10 Years of Experience in Injection Molding
(Optimization / Foaming / Trial Injection)

2 Technical Research Team

| Control technology and mechanical design personnel
available for ongoing support


3 Auxiliary Facility Support

| Deployment of Skilled Technicians and Consulting Staff

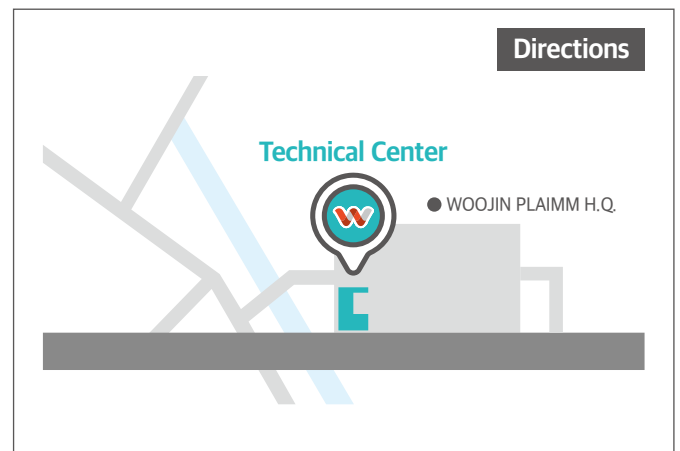

Directions

WOOJIN PLAIMM Technical Center **delivers the best results**
to our customers through **strategic consulting**
and **technical knowledge sharing.**



Promotion

GLOBAL NETWORK



WOOJIN PLAIMM H.Q.

100, Woojinplaimm-ro, Jangan-myeon, Boeun-gun, Chungcheongbuk-do, Republic of Korea (28913)

Tel. +82 43-540-9000 Fax. +82 43-543-1420 E-mail. info@wjpim.com

SISTER COMPANIES

Austria Inc.	office@woojin.at	U.S.A Inc.	us@wjpim.com	Mexico Inc.	mx@wjpim.com	China Inc.	cn@wjpim.com
Vienna	T. +43-2256-20413	Chicago	T. +1-847-457-1916	Monterrey	T. +52-81-4452-0851	Ningbo	T. +86-574-8680-6088
		Atlanta	T. +1-224-500-5085	Queretaro	T. +52-81-1555-4286	Guangdong	T. +86-135-4938-2580
		Detroit	T. +1-334-332-8597	Tijuana	T. +52-81-1555-4224	Suzhou	T. +86-186-6787-5052

BRANCH OFFICE

Türkiye	office@woojin.at	Slovakia	sk@wjpim.com	Poland	ploffice@wjpim.com	Russia	ru@wjpim.com
Istanbul	T. +90-216-290-1483	Zilina	T. +421-903-207-420	Katowice	T. +48-513-211-177	Moscow	T. +7-495-245-0073
Thailand	th@wjpim.com	India	india1@wjpim.com	Malaysia	my@wjpim.com	Indonesia	id@wjpim.com
Bangkok	T. +66-2-745-4746	Chennai	T. +91-77081-80333	Kuala Lumpur	T. +60-3-7887-0590	Jakarta	T. +62-21-8370-1281
Chonburi	T. +66-33-138-848	Anantapur	T. +91-77081-54222	Johor Bahru	T. +60-7-2121-322	Cikarang	T. +62-21-8977-4613
Vietnam	vn@wjpim.com	Japan	jp@wjpim.com	Bangladesh	bd.arif@wjpim.com	Philippines	philippines2@wjpim.com
Bacninh	T. +84-22-2390-6797	Nagoya	T. +81-80-1249-1753	Dhaka	T. +880-19-2563-7935	Philippines	T. +63-49-542-5722
Hochiminh	T. +84-28-3772-0028						







HOME PAGE



YOUTUBE



CopyRight©2026, WOOJIN PLAIMM Co.,Ltd.

- ※ The copyright of this catalog belongs to WOOJIN PLAIMM Co., Ltd. Unauthorized use may result in legal liability under copyright law.
- ※ Product images and specifications are subject to change without prior notice for quality improvement.
- ※ Content updated as of January 2, 2026.

Korea No.1 IMM Manufacturer

WOOJIN PLAIMM Co., Ltd. | 100, Woojinplaimm-ro, Jangan-myeon, Boeun-gun, Chungcheongbuk-do, Republic of Korea
T. +82 43-540-9000 F. +82 43-543-1420 E. info@wjpim.com

