

ENGLISH

VH SERIES

Vertical Hybrid Series



OVERVIEW

VH-RGS

Self-Weight Clamping Low-Profile Vertical Energy-Saving Series

Low-profile vertical injection molding machine that saves energy through a self-weight clamping system

(50~300Ton)



IMM Promotion



Hybrid System
(Servo Motor)



Faster
Cycle Time




Self-Weight
Clamping*




Low-Profile
Clamping
Structure

*(20% Energy Efficiency Improvement)

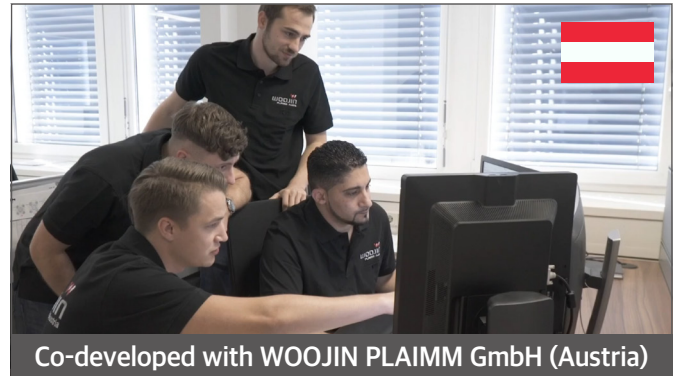

Co-developed with WOJIN PLAIMM GmbH (Austria)

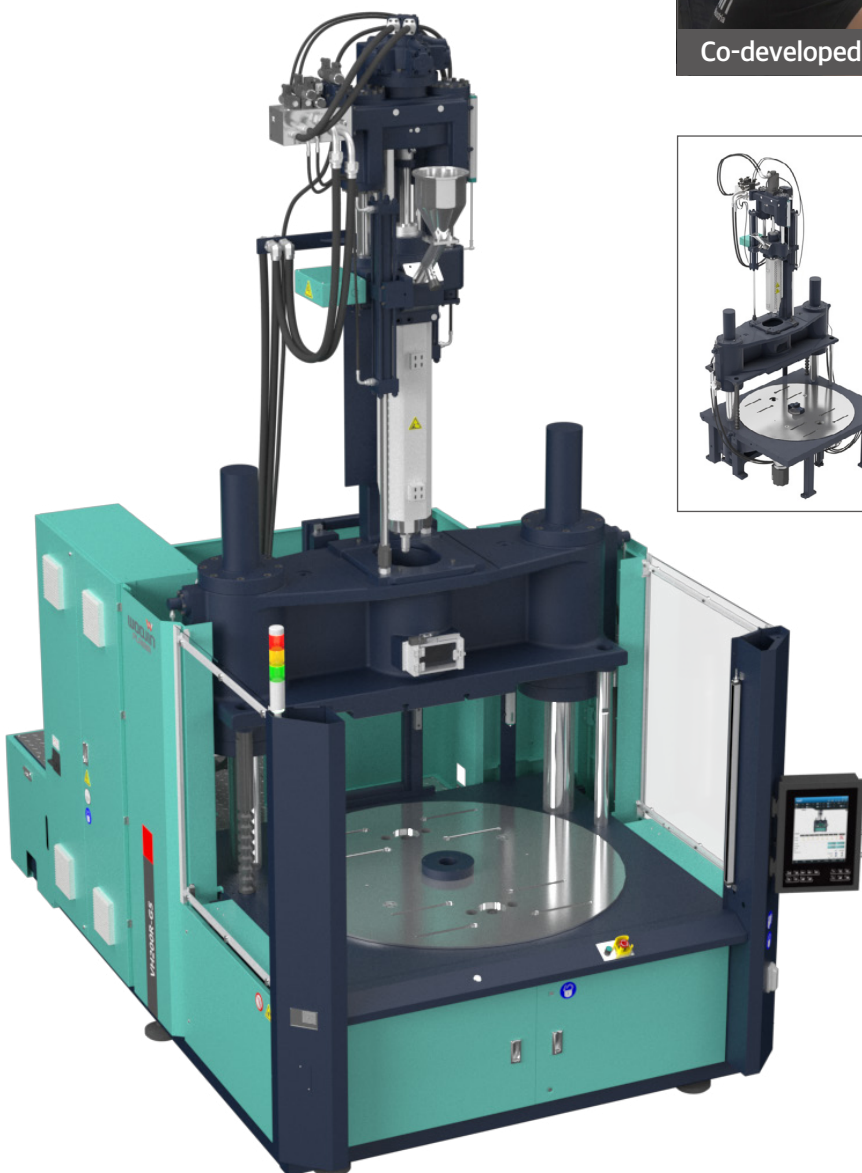

Two turntable sizes available



For customer convenience,
we provide two turntables for each
machine with the same tonnage.
(120, 150, 250, 300)

VH200RGS

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

FEATURES

ENERGY-SAVING CLAMPING SYSTEM

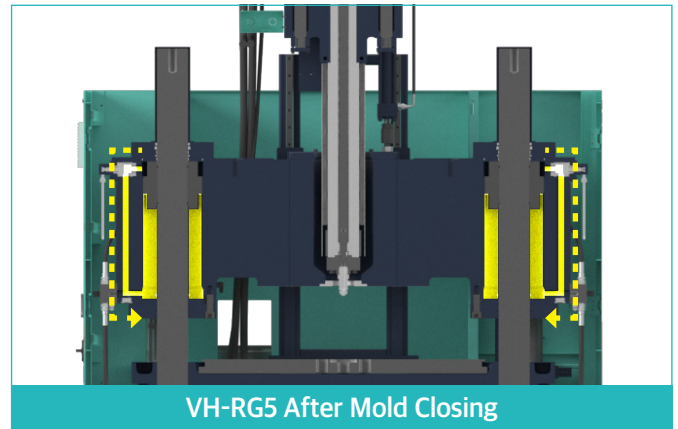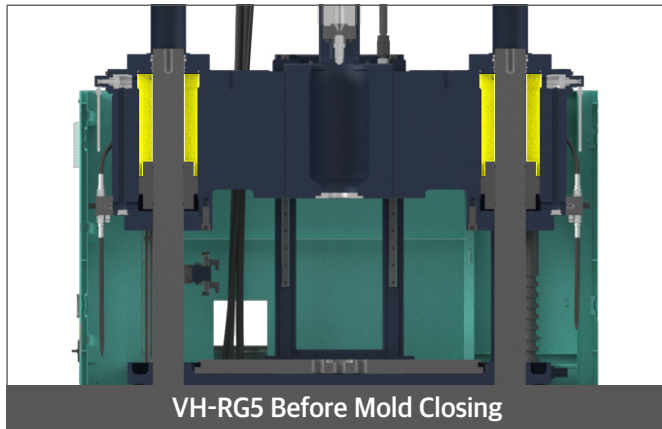

1 Low-Profile Clamping Structure / Self-Weight Clamping System




- | Structure utilizes the weight of the upper platen and mold to achieve energy savings (20%)
- | Optimized for self-weight clamping with a two-column tie-bar structure using piston rods of equal area
- | The low height of the rotary table allows easy mold installation and manual operation

2 Optimized Hydraulic Oil Management

- | During mold closing, hydraulic oil from the upper piston flows to the lower side, eliminating the need for additional oil supply
- | Unlike conventional low-profile vertical machines, no auxiliary tank is required, making hydraulic oil management easier

3 Rotary Table Unit

- | Positioning control system enables precise position control regardless of load
- | Allows easy speed setting and supports high-speed rotation of the rotary table
- | Larger rotary table size expands the range of selectable mold sizes
- | 2-stage turntable system allows automation (insert loading / product ejection)

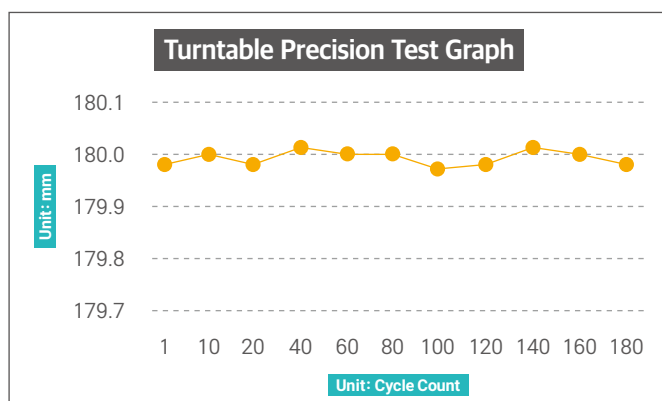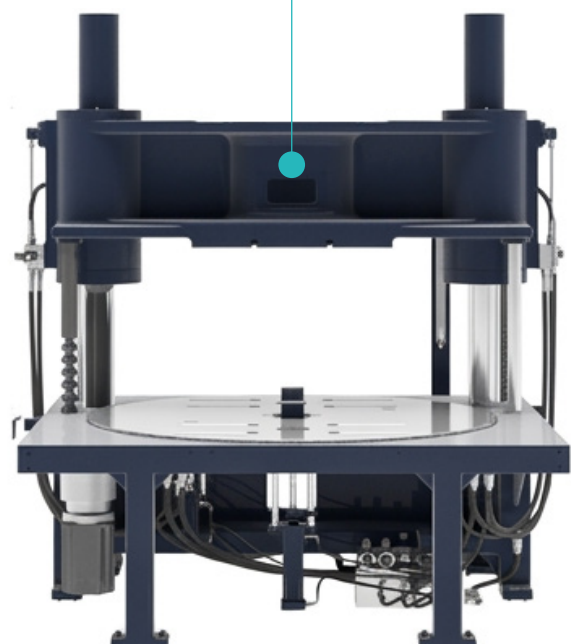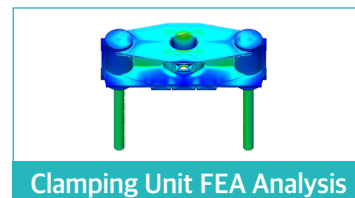

FEATURES

DEDICATED VERTICAL INJECTION UNIT FOR VH-RG5

1 Independent suck back structure / 2 axis injection cylinder

- | Improving responsiveness and control capability by independent injection and suck back structure.
- | Optimized design for balance and stability of the machine with symmetric structure
- | LM guide applied on injection frame beam to maintain parallel alignment.
- | Improving vibration during injection, nozzle and charging movement by applying injection frame beam
- | Improved responsiveness with the application of a pipe-less injection cylinder



| Injection frame beam,
LM guide applied



※ Horizontal injection is also possible

HIGH-EFFICIENCY HYDRAULIC SYSTEM

1 Oil Tank Circulation System

- | Cooling unit and filtration system are independently configured to maintain consistent temperature and cleanliness
- | Structure avoids resistance to the filter and cooler during machine operation
- | Prevents hydraulic component damage and oil leakage caused by oil temperature rise

2 High-Efficiency Servo Pump & Motor Equipped



- | Reduce energy and hydraulic oil consumption by applying high-efficiency servo pump system

3 Ejector hydraulic circuit and hydraulic oil cooling

- | Hydraulic circuit for simultaneous ejector operation during mold closing, nozzle forward movement, and injection.
- | Independent oil circulation method except ejector operation keeps cleanliness and constant temperature (extending hydraulic oil lifespan and improving durability of hydraulic components)



PARKER E02-FOAM Seamless Pipe

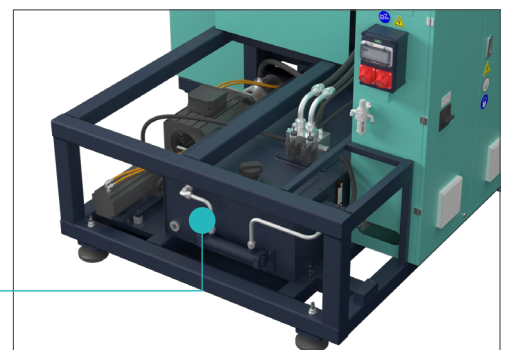

VH-RG5 Hydraulic Section

ULTRA-PRECISION CONTROL SOLUTIONS



1 European Control Components

Providing an optimized ultra-precision control solution with a combination of servo motor and BOSCHE valve (Made in Germany)

Injection weight deviation within 1%




30% power consumption reduction compared to existing vertical machines (based on Euromap 60.1)

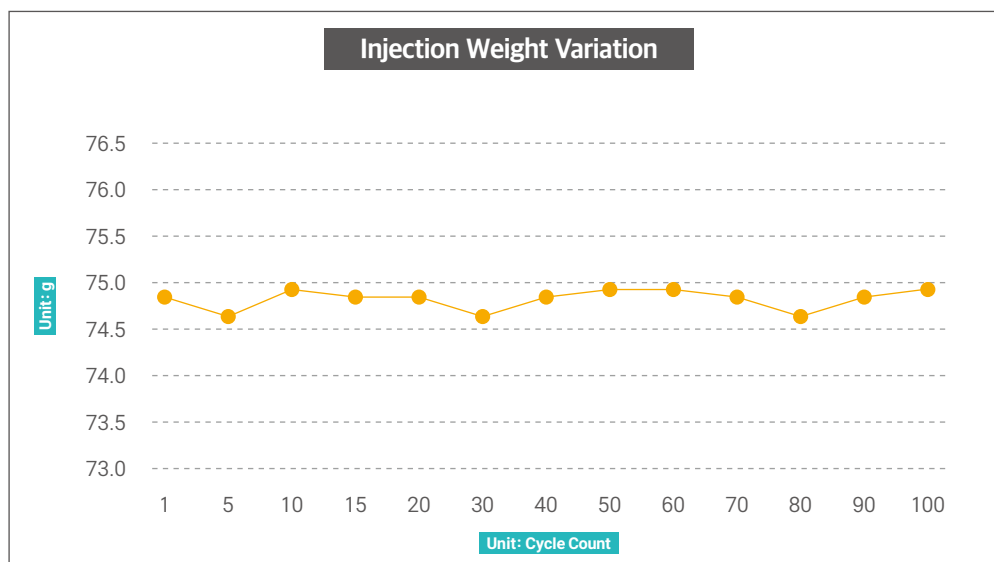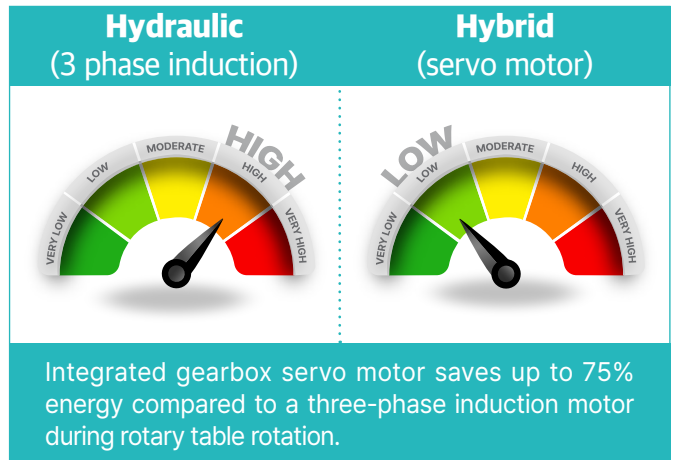

VH120RGS

Product	Tool Box
Resin	PP
Cavity	2 Cavity

※ Specifications may vary depending on the mold, raw material, and product specifications

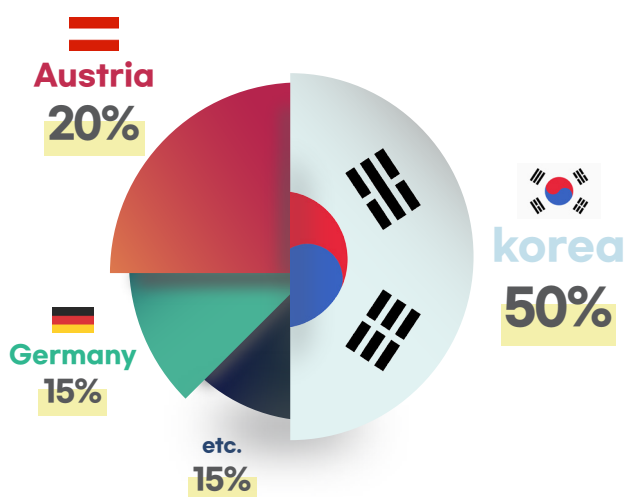

Made in KOREA

1 Proven Components

Industry-leading use of domestically manufactured components

Equipped with premium European components

※ This material provides statistical data on the country of origin of key components in the VH Series, including the rotary & main servo motors, pumps, drives, controllers, metering motor, hydraulic system, castings, cylinders, and screw & barrel.

OVERVIEW

VHA-RS

Vertical Energy-Saving Hybrid Series

A standard vertical injection molding machine designed for users seeking solutions for manufacturing quality and productivity

(50~100Ton)




Hybrid System
(Servo Motor)



Faster
Cycle Time



High-Precision
Turn table

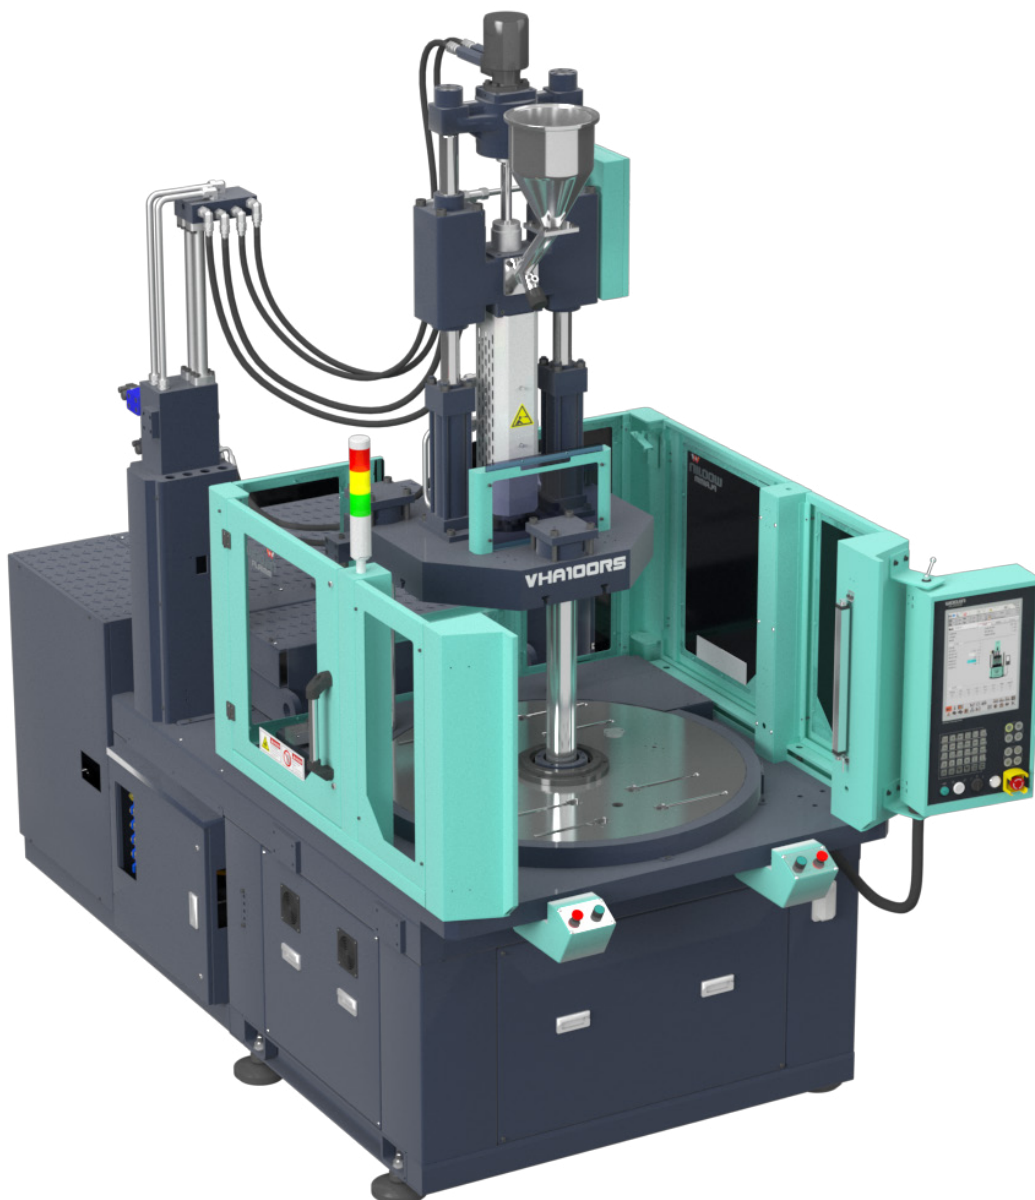

VHA100RS

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

FEATURES

LOWER CLAMPING UNIT

1 Center Direct-Pressure Clamping Unit

- | Clamping force generated by a center direct-pressure booster ram cylinder
- | Precise clamping force can be set via clamping pressure settings
- | Three-column tie-bar structure (50-100 ton) minimizes clamping deformation

2 Rotary Table Unit

- | Positioning control system enables precise position control regardless of load
- | Allows easy speed setting and supports high-speed rotation of the rotary table


VERTICAL INJECTION UNIT

1 Compact Injection Structure


- | Wide range of injection units can be applied according to product characteristics
- | Increased rigidity of the nozzle touch cylinder rod prevents vibration during injection

1 Ejector Hydraulic Circuit & Hydraulic Oil Cooling

- | Designed to enable multi-stage control of ejector speed and pressure
- | When the ejector is not in operation, the ejector pump circulates hydraulic oil for cooling and filtering

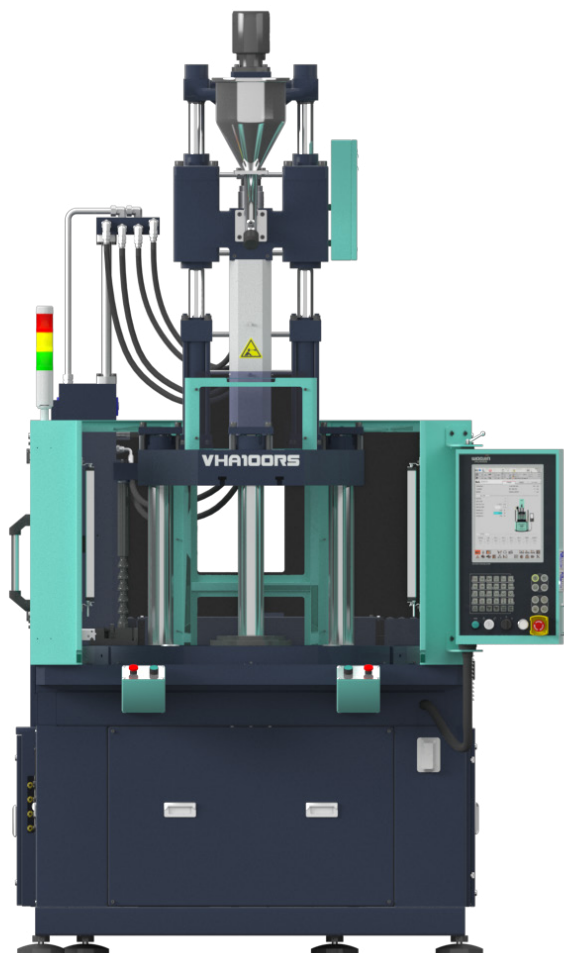


Holding Pressure Switching Position Deviation Test

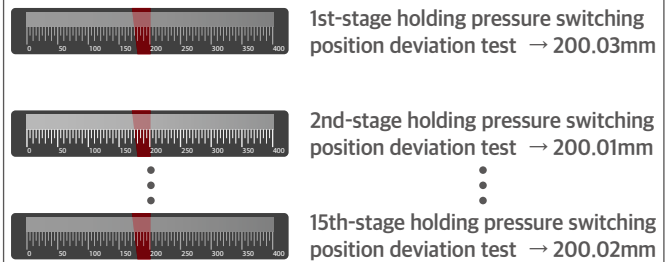

※ Position deviation of ± 0.05 mm during holding pressure transfer

Turntable Precision Test Graph

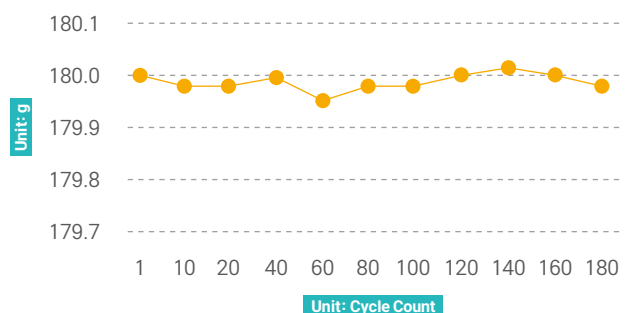

OVERVIEW

VHL-RS

Low-Profile Vertical Energy-Saving Hybrid Series

Low-profile vertical injection molding machine with a lowered table height through a vertical clamping and vertical injection structure

(250~650Ton)



IMM Promotion



Hybrid System
(Servo Motor)




Faster
Cycle Time



High-Precision
Turn table



Low-Profile
Clamping
Structure

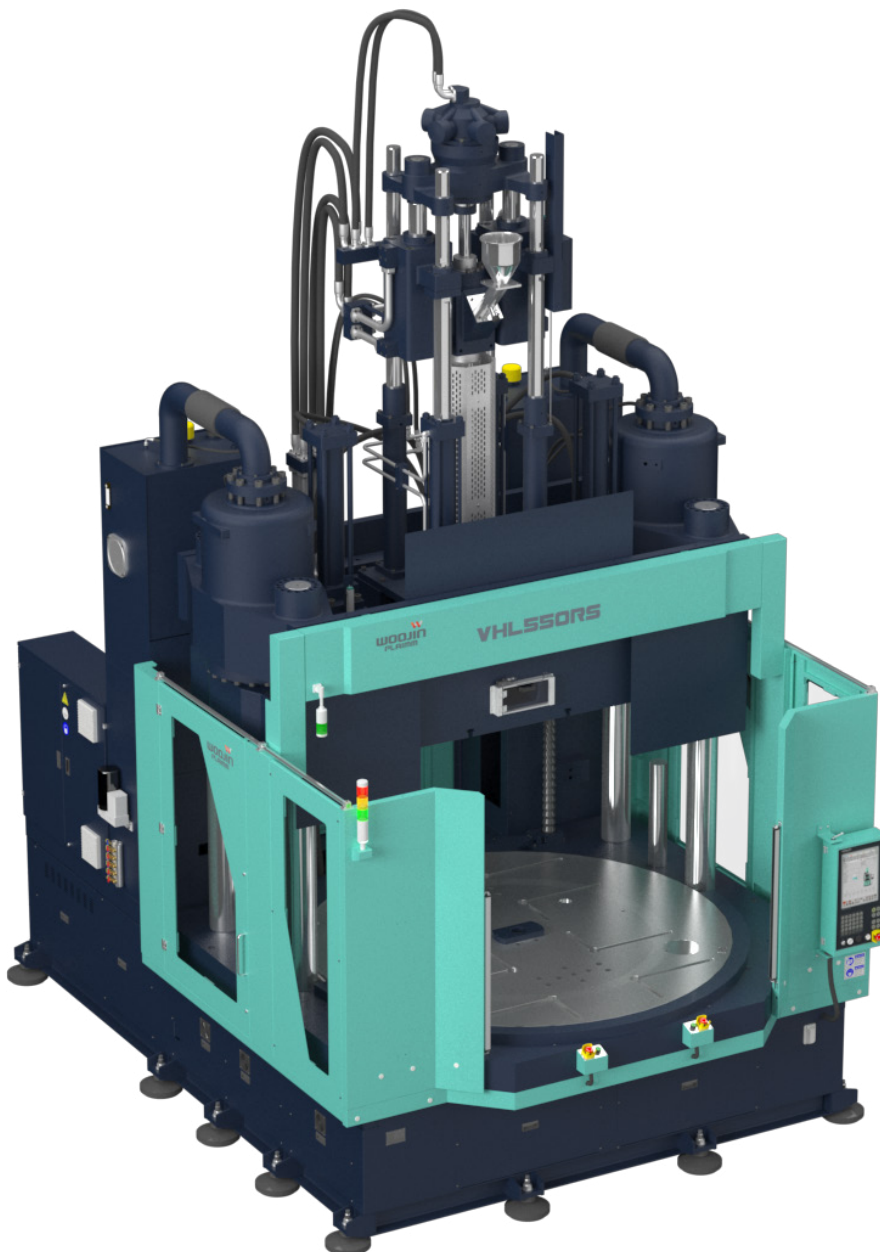

VHL550RS

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

FEATURES

UPPER CLAMPING UNIT

1 Application of Low-Profile Clamping Structure

- | Four-column tie-bar structure ensures stability
- | Low rotary table height allows easy mold installation and manual operation
- | Enlarged rotary table size compared to machines of the same tonnage
- | Precise clamping force can be set via clamping pressure settings

2 Rotary Table Unit

- | Positioning control system enables precise position control regardless of load
- | Allows easy speed setting and supports high-speed rotation of the rotary table

VERTICAL INJECTION UNIT

1 Dual Injection Cylinder


- | Supports a wide range of injection units based on product characteristics
- | Enhanced rigidity of the nozzle touch cylinder rod prevents vibration during injection
- | Low injection unit height allows easy maintenance

2 PID Temperature Control & Synchronized Heating Control


- | Continuously controls the user-set temperature to minimize temperature deviation
- | Uniform control across all zones during barrel heating prevents resin carbonization and reduces defects




Holding Pressure Switching Position Deviation Test



1st-stage holding pressure switching position deviation test → 200.00mm




2nd-stage holding pressure switching position deviation test → 200.03mm



15th-stage holding pressure switching position deviation test → 200.01mm

Turntable Precision Test Graph

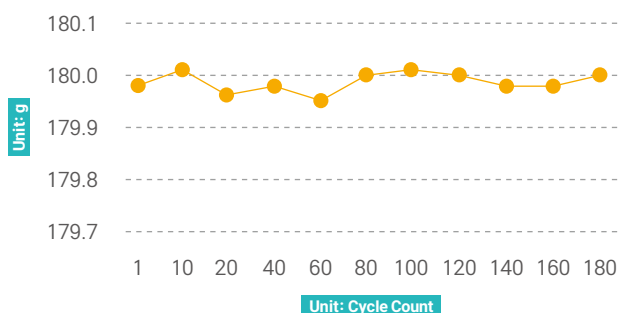

IMC 710



FEATURES




- UI icons in image-centered pictogram style
- Interface optimized with essential buttons
- Supports multiple languages


SPECIFICATIONS

Display	15-inch (IPS LCD)
Resolution	768 X 1024
Touch Screen	Capacitive
CPU	ARM Cortex-A9 Core 11,500 DMIPS
RAM	DDR3, 1GB
Storage	eMMC 8GB
IP Rating	IP65 (Front) IP20 (Back)


MAIN PAGE SCREEN CONFIGURATION

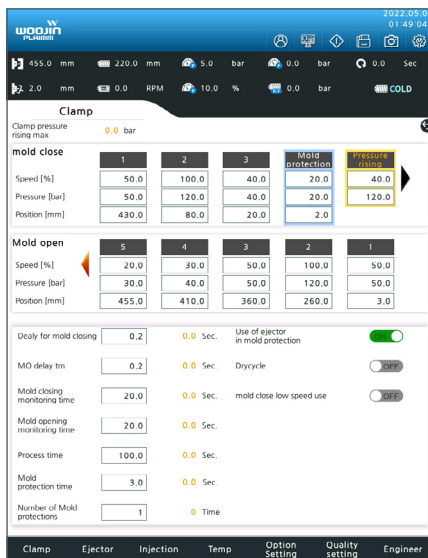

Clamp

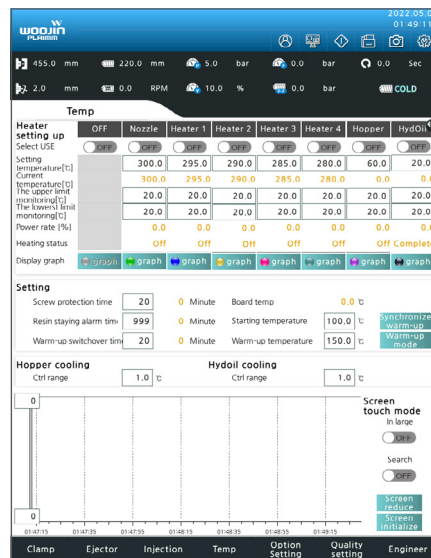

Temperature

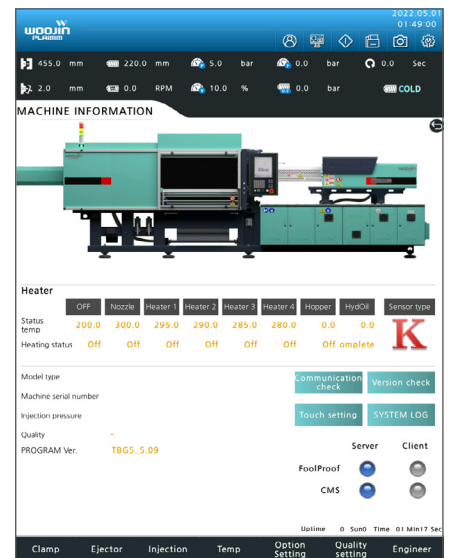


Machine Information

※ This controller may be changed without prior notice due to optional specifications or software updates.

IMC400



FEATURES




- User-centric interface optimized for IMM
- Easy operation with a combination of touch panel and physical buttons
- Cycle time analysis page available


SPECIFICATIONS

Display	15-inch
Resolution	768 X 1024
Touch Screen	TFT 컬러 터치 스크린
CPU	Intel atom e3815, 1460MHz
RAM	DDR3, 1GB, SDRAM
Storage	CompactFlash 32GB
IP Rating	IP65 (Front) IP20 (Back)


MAIN PAGE SCREEN CONFIGURATION

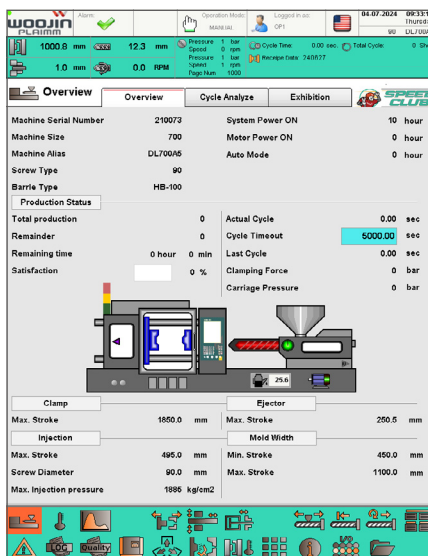

Home Screen

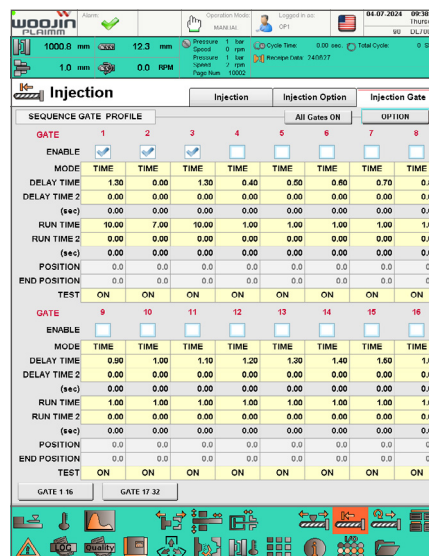

Process Analysis Page

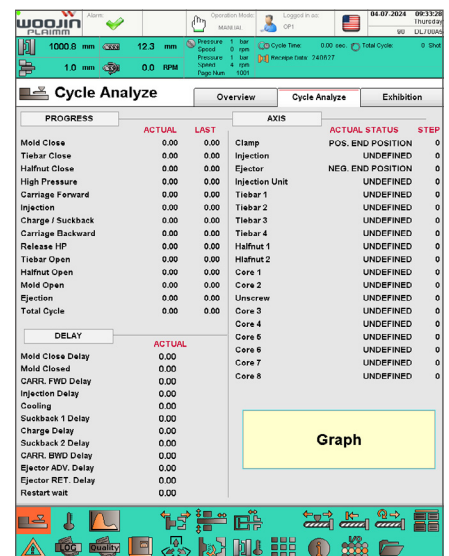

Machine Operation Page

※ This controller may be changed without prior notice due to optional specifications or software updates.

SPECIFICATIONS

VH-RG5

MODEL		VH50RG5			VH75RG5			VH100RG5			VH120RG5-SD			VH120RG5			VH150RG5-SD		
Injection Unit		IHV160			IHV160			IHV230			IHV350			IHV350			IHV490		
Screw & Barrel type		O	A	B	O	A	B	O	A	B	O	A	B	O	A	B	O	A	B
Screw diameter	mm	22	25	28	22	25	28	28	32	36	32	36	40	32	36	40	36	40	45
Injection pressure	kg/cm²	2402	1860	1483	2402	1860	1483	2409	1844	1457	2476	1956	1584	2476	1956	1584	2431	1969	1556
	Mpa	236	182	145	236	182	145	236	181	143	243	192	155	243	192	155	238	193	153
Theoretical injection volume	cm³	53	68	86	53	68	86	99	129	163	145	183	226	145	183	226	204	251	318
Shot weight (PS)	g	49	63	79	49	63	79	91	119	150	134	169	208	134	169	208	188	231	293
Injection rate	cm³/s	57	74	93	57	74	93	81	105	133	116	146	181	116	146	181	119	147	186
Screw stroke	mm	140			140			160			180			180			200		
Injection speed	mm/s	150			150			131			143			143			117		
Plasticizing capacity (PS)	kg/h	18	26	34	18	26	34	31	43	70	38	63	79	38	63	79	63	79	104
Screw rotation speed	rpm	300			300			300			270			270			270		
Clamping Unit																			
Clamping force	ton(kN)	50(490)			75(735)			100(981)			120(1177)			120(1177)			150(1471)		
Daylight	mm	300			300			350			350			350			350		
Rotary Table Size	Ø	900			1050			1200			1240			1350			1350		
Max. Daylight	mm	500			550			600			650			650			650		
Min. mold height	mm	200			250			250			300			300			300		
Ejector force	ton(kN)	2.7(26)			2.7(26)			4.3(42)			4.3(42)			4.3(42)			4.3(42)		
Ejector stroke	mm	60			60			80			80			80			80		
General																			
Heater capacity	kW	6.1			6.1			6.7			8.1			8.1			10.1		
Motor capacity	kW	23.0			23.0			23.0			27.8			27.8			27.8		
Total electric power capacity	kW	29.1			29.1			29.7			35.9			35.9			37.9		
Hydraulic oil tank capacity	L	190			190			240			270			270			270		
Machine weight	ton	5.5			6.5			8			9.5			9.5			11		
Machine dimension (L×W×H)	m	3.0×2.0×3.3			3.2×2.2×3.4			3.3×2.3×3.6			3.5×2.4×4.1			3.5×2.5×4.1			3.5×2.6×4.3		
Cooling water consumption	L/min	20			20			40			40			40			40		

01. The oretical injection volume: cross section of screw*screw stroke.

02. Minimum mold size is 70% of the maximum mold size

03. Maximum mold height must be 70% or less of the maximum mold opening stroke

04. The specifications might be changed without any prior notice.

05. Machine dimensions may vary when the injection unit moves UP or DOWN.

VH150RG5			VH200RG5			VH250RG5-SD			VH250RG5			VH300RG5-SD			VH300RG5		
IHV490			IHV860			IHV1230			IHV1230			IHV1610			IHV1610		
O	A	B	O	A	B	O	A	B	O	A	B	O	A	B	O	A	B
36	40	45	45	50	55	50	55	60	50	55	60	55	60	65	55	60	65
2431	1969	1556	2467	1998	1651	2340	1934	1625	2340	1934	1625	2327	1956	1666	2327	1956	1666
238	193	153	242	196	162	229	190	159	229	190	159	228	192	163	228	192	163
204	251	318	358	442	535	540	653	777	540	653	777	712	848	995	712	848	995
188	231	293	330	407	493	498	602	716	498	602	716	656	781	917	656	781	917
119	147	186	216	267	323	231	279	332	231	279	332	232	276	324	232	276	324
200			225			275			275			300			300		
117			135			117			117			97			97		
63	79	104	77	102	131	90	116	147	90	116	147	112	141	175	112	141	175
270			180			160			160			150			150		
150(1471)			200(1961)			250(2452)			250(2452)			300(2942)			300(2942)		
350			400			550			550			550			550		
1600			1600			1800			2000			1800			2000		
650			750			1000			1000			1000			1000		
300			350			450			450			450			450		
4.3(42)			5.4(53)			5.4(53)			5.4(53)			5.4(53)			5.4(53)		
80			100			100			100			100			100		
10.1			14.1			16.2			16.2			20.0			20.0		
27.8			47.8			47.8			47.8			47.8			47.8		
37.9			61.9			64.0			64.0			67.8			67.8		
270			400			400			400			400			400		
11			13.5			16.5			18.5			17			19		
3.8×2.7×4.3			3.9×2.7×4.7			4.1×3.0×5.6			4.3×3.2×5.6			4.1×3.0×5.7			4.3×3.2×5.7		
40			40			40			40			40			40		

SPECIFICATIONS

VHA-RS | VHL-RS

MODEL		VHA50RS			VHA75RS			VHA100RS		
Injection Unit		IH 140V			IH 200V			IH 280V		
Screw & Barrel type		O	A	B	O	A	B	O	A	B
Screw diameter	mm	22	25	28	25	28	32	28	32	36
Injection pressure	kg/cm²	3487	2700	2152	2923	2330	1784	2847	2180	1722
	Mpa	342	265	211	287	228	175	279	214	169
Theoretical injection volume	cm³	46	59	74	69	86	113	99	129	163
Shot weight (PS)	g	42	54	68	63	78	102	90	117	148
Injection rate	cm³/s	49	64	80	59	74	97	97	127	161
Screw stroke	mm	120			140			160		
Injection speed	mm/s	130			120			158		
Plasticizing capacity (PS)	kg/h	13	16	23	16	23	31	23	31	51
Screw rotation speed	rpm	220			220			220		
Clamping Unit										
Clamping force	ton(kN)	50(490)			75(735)			100(981)		
Daylight	mm	250			250			250		
Rotary Table Size	Ø	880			1000			1100		
Max. Daylight	mm	450			450			500		
Min. mold height	mm	200			200			250		
Ejector force	ton(kN)	2.7(26)			2.7(26)			4.3(42)		
Ejector stroke	mm	60			60			80		
General										
Heater capacity	kW	5.2			6.1			6.7		
Motor capacity	kW	13.9			13.9			19.5		
Total electric power capacity	kW	19.1			20.0			26.2		
Hydraulic oil tank capacity	L	180			180			250		
Machine weight	ton	3.5			4.2			5.5		
Machine dimension (L×W×H)	m	2.9×1.6×2.9			3.1×1.8×3.1			3.5×1.9×3.5		
Cooling water consumption	L/min	20			20			40		

01. The oretical injection volume: cross section of screw*screw stroke.

02. Minimum mold size is 70% of the maximum mold size

03. Maximum mold height must be 70% or less of the maximum mold opening stroke

04. The specifications might be changed without any prior notice.


05. Machine dimensions may vary when the injection unit moves UP or DOWN.

MODEL		VHL250RS-SD			VHL250RS			VHL350RS			VHL450RS			VHL550RS			VHL650RS		
Injection Unit		IH 740V			IH 740V			IH 1090V			IH 1330V			IH 1970V			IH 3090V		
Screw & Barrel type		O	A	B	O	A	B	O	A	B	O	A	B	O	A	B	O	A	B
Screw diameter	mm	40	45	50	40	45	50	50	55	60	55	60	65	65	70	75	75	80	85
Injection pressure	kg/cm²	2695	2129	1724	2695	2129	1724	2332	1928	1620	2166	1820	1551	1988	1714	1493	2061	1812	1605
	Mpa	264	208	169	264	208	169	228	189	158	212	178	152	195	168	146	202	177	157
Theoretical injection volume	cm³	276	350	432	276	350	432	471	570	678	618	735	863	995	1154	1325	1502	1709	1929
Shot weight (PS)	g	254	322	397	254	322	397	434	525	625	568	676	794	905	1050	1206	1384	1575	1778
Injection rate	cm³/s	163	207	255	163	207	255	240	291	346	323	384	451	362	408	469	488	555	627
Screw stroke	mm	220			220			240			260			300			340		
Injection speed	mm/s	130			130			122			136			106			110		
Plasticizing capacity (PS)	kg/h	56	76	101	56	76	101	101	130	164	88	111	137	136	166	199	199	236	278
Screw rotation speed	rpm	180			180			180			120			120			120		
Clamping Unit																			
Clamping force	ton(kN)	250(2452)			250(2452)			350(3432)			450(4413)			550(5393)			650(6374)		
Daylight	mm	500			500			550			650			700			700		
Rotary Table Size	Ø	1600			1800			1900			2200			2500			2700		
Max. Daylight	mm	900			900			1000			1200			1300			1300		
Min. mold height	mm	400			400			450			550			600			600		
Ejector force	ton(kN)	5.4(52)			5.4(52)			7.0(68)			11.0(107)			11.0(107)			13.7(134)		
Ejector stroke	mm	100			100			120			150			150			150		
General																			
Heater capacity	kW	12.5			12.5			16.2			20			20			25.6		
Motor capacity	kW	47.8			47.8			61.1			71.8			71.8			98		
Total electric power capacity	kW	60.3			60.3			77.3			91.8			91.8			123.6		
Hydraulic oil tank capacity	L	380(MT)+ 140(AT)+140(AT)			380(MT)+ 140(AT)+140(AT)			550(MT)+ 190(AT)+190(AT)			660(MT)+ 290(AT)+290(AT)			745(MT)+ 375(AT)+375(AT)			770(MT)+ 400(AT)+400(AT)		
Machine weight	ton	21			21			25			35			43.5			43.5		
Machine dimension (L×W×H)	m	4.1×2.3×4.4			4.1×2.8×4.5			4.3×2.9×5.0			4.6×3.3×5.7			5.0×3.6×6.3			5.4×3.9×6.8		
Cooling water consumption	L/min	40			40			40			40			40			40		

PLATEN DIMENSION

단위: mm


1

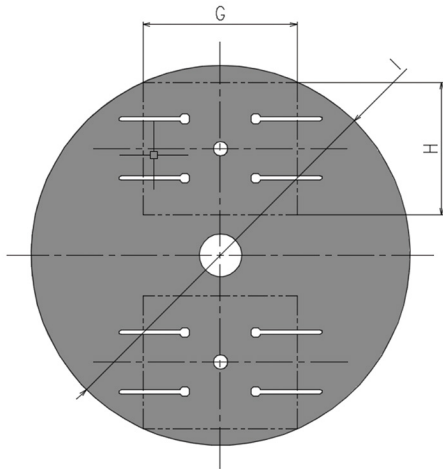

1 VH-RG5

Unit: mm	Turn-Table		
	G	H	I
VH50RG5	400	300	900
VH75RG5	450	330	1050
VH100RG5	470	350	1200
VH120RG5-SD	600	400	1240
VH120RG5	600	440	1350
VH150RG5-SD	650	470	1350
VH150RG5	750	520	1600
VH200RG5	750	520	1600
VH250RG5-SD	870	620	1800
VH250RG5	950	650	2000
VH300RG5-SD	870	620	1800
VH300RG5	950	650	2000


2

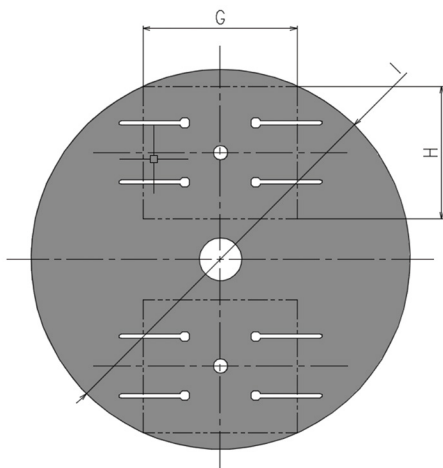

2 VHA-RS

Unit: mm	Turn-Table		
	G	H	I
VHA50RS	350	250	880
VHA75RS	450	300	1000
VHA100RS	450	350	1100

3

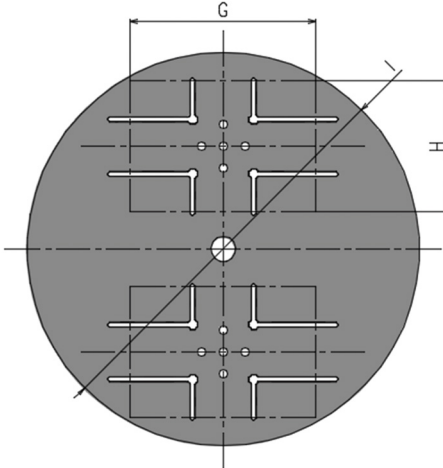


3 VHL-RS

Unit: mm	Turn-Table		
	G	H	I
VHL250RS-SD	750	600	1600
VHL250RS	850	600	1800
VHL350RS	980	685	1900
VHL450RS	1100	800	2200
VHL550RS	1340	840	2500
VHL650RS	1400	950	2700


※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

MACHINE DIMENSION


VH-RG5

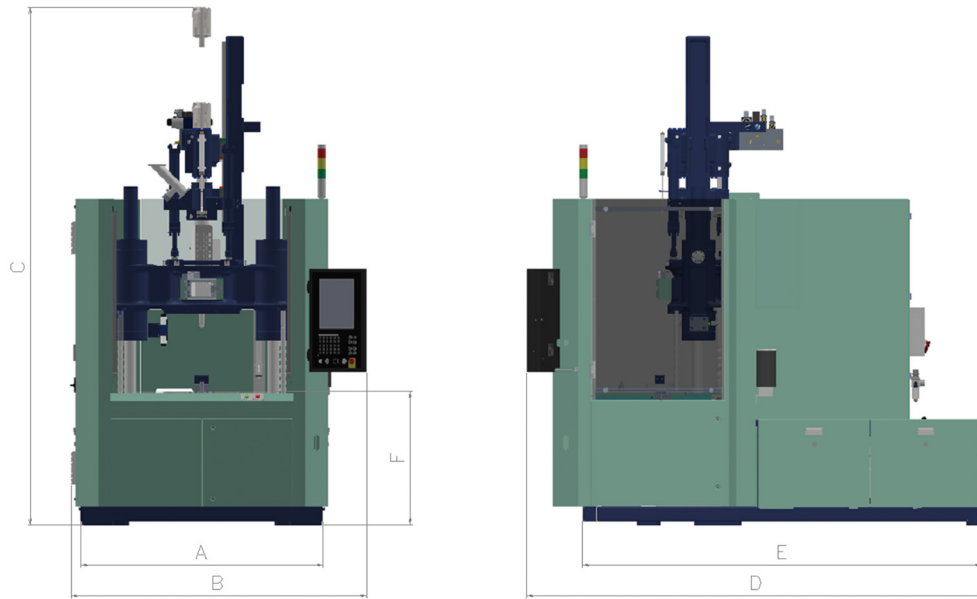

▲ Machine Dimension

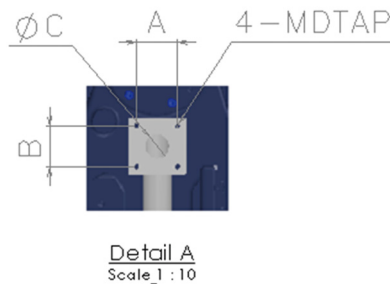

▲ Hopper installation position dimension





▲ Nozzle dimension

Unit: mm	Machine Dimension						Hopper installation position dimension				Nozzle dimension		
	A	B	C	D	E	F	A	B	ØC	D	E	ØF	G
VH50RG5	1580	1960	3231	2898	2670	870	85	85	40	12	30	100	9
VH75RG5	1740	2115	3316	3131	2905	870	85	85	40	12	30	100	9
VH100RG5	1870	2241	3557	3295	3070	870	85	85	40	12	30	100	9
VH120RG5-SD	1980	2305	4046	3404	3175	920	85	85	40	12	30	100	9
VH120RG5	2070	2443	4046	3492	3265	920	85	85	40	12	30	100	9
VH150RG5-SD	2160	2540	4217	3488	3260	920	85	85	40	12	30	100	9
VH150RG5	2300	2680	4217	3707	3480	920	85	85	40	12	30	100	9
VH200RG5	2300	2681	4692	3836	3610	920	85	85	50	12	40	100	9
VH250RG5-SD	2635	2978	5518	4079	3845	1020	85	85	50	12	40	100	14
VH250RG5	2760	3132	5518	4239	4005	1020	85	85	50	12	40	100	14
VH300RG5-SD	2635	2978	5672	4079	3845	1020	85	85	50	12	40	100	14
VH300RG5	2760	3132	5672	4239	4005	1020	85	85	50	12	40	100	14

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

MACHINE DIMENSION

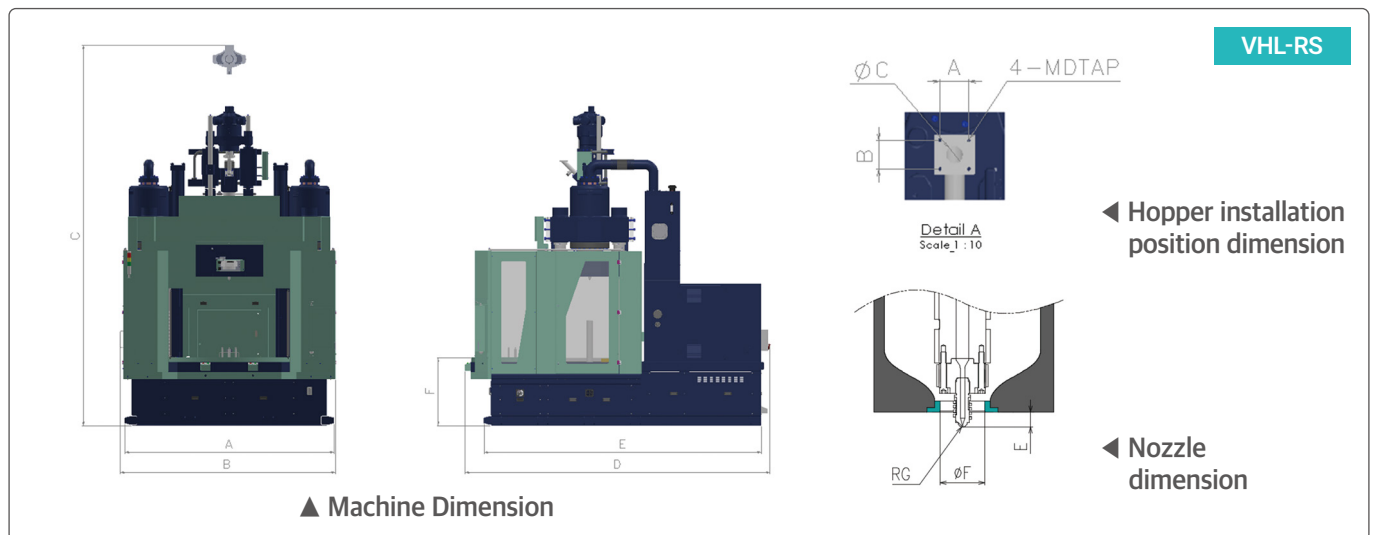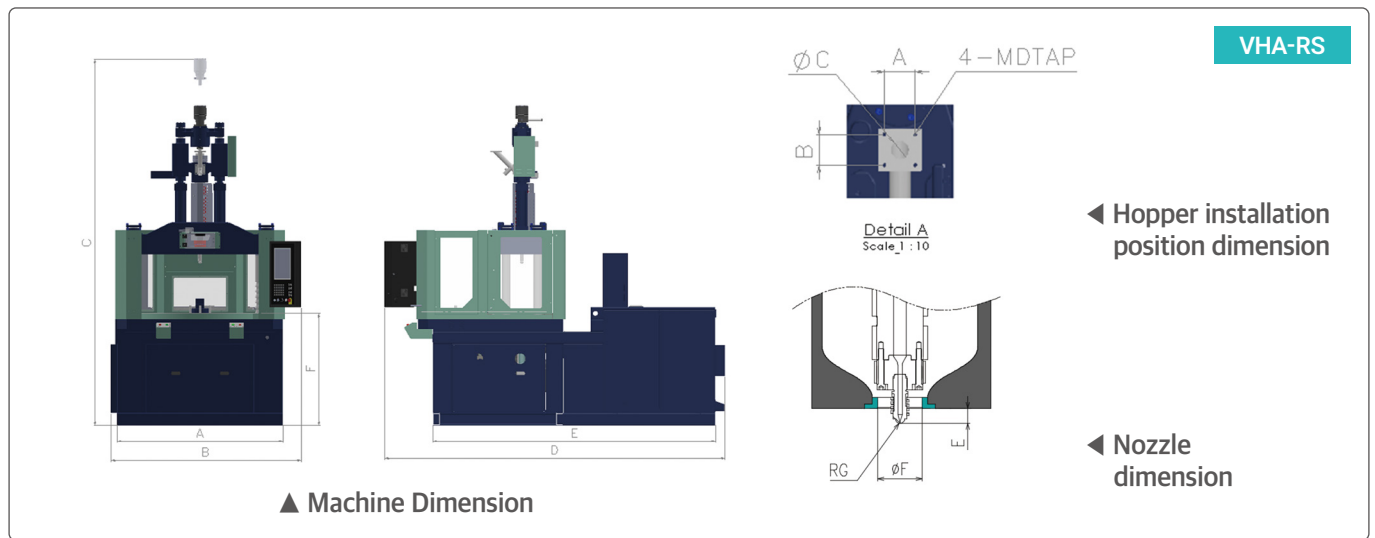

Unit: mm	Machine Dimension						Hopper installation position dimension				Nozzle dimension		
	A	B	C	D	E	F	A	B	ØC	D	E	ØF	G
VHA50RS	1200	1561	2863	2846	2300	895	85	85	40	12	30	100	9
VHA75RS	1340	1738	3005	3066	2500	910	85	85	40	12	30	100	9
VHA100RS	1500	1823	3305	3449	2800	1010	85	85	40	12	30	100	9


Unit: mm	Machine Dimension						Hopper installation position dimension				Nozzle dimension		
	A	B	C	D	E	F	A	B	ØC	D	E	ØF	G
VHL250RS-SD	2140	2294	4307	4058	3600	800	85	85	50	12	40	100	9
VHL250RS	2390	2750	4405	4044	3560	920	85	85	50	12	40	100	9
VHL350RS	2700	2820	4915	4219	3675	862	85	85	50	12	40	100	14
VHL450RS	3096	3240	5619	4572	4107	1002	85	85	50	12	50	100	14
VHL550RS	3435	3580	6246	4939	4447	1092	135	135	75	12	110	100	19
VHL650RS	3500	3860	6769	5373	4800	1197	135	135	75	12	110	100	19

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

Injection Unit	Clamping Unit	General
Standard		
01. Back-Pressure Closed-loop system	01. Clamping area Curtain sensor	01. Clamp area safety sensor (Vertical type IMM)
02. Single Flight Screw	02. Hydraulic Core puller (Moving platen side, 1 stage)	02. Standard Maintenance tools
03. Injection valve gate circuit (AC 1 + DC 1)	03. Air blow-off unit (Fixed side 1 + Moving side 1)	03. Leveling pad
04. PID Heating Control	04. Safety device(for electric & hydraulic)	04. Cooling water distributor
05. Weekly Heating Timer	05. Mold-Open Speed & Pressure step (5 step)	05. Automatic grease lubrication (Clamping)
06. Cold screw start protection mode	06. Mold-Close Speed & Pressure step (5 step)	06. Robot interface (Standard)
07. Temperature display & Alarm in abnormal Temp.	07. Ejector Speed & Pressure step (3 step)	07. 3 Phase electric outlet (2 ea)
08. Auto Purging		08. Hopper throat temperature control device
09. Injection Speed & Pressure step (10 step)		09. Hydraulic oil level alarm
10. Holding Speed & Pressure step (5 step)		10. Hydraulic oil temperature check & alarm
11. Charging Speed & Pressure step (4 step)		11. Hydraulic oil heating mode
12. Back Pressure control step (4 step)		12. 3 color alarm light
13. Injection Pressure Graph Display		13. Shot data saving by external way
14. Injection Speed Graph Display		14. Production data statistics
15. Screw RPM Display		15. Alarming & History save
16. Cushion Display & Alarm		16. Log history save
17. Charging time count & alarm		17. I/O circuit display
18. Screw & Barrel (Anti Wear)		
Option		
01. Heater Disconnection check device	01. Pneumatic Core Puller (1-3 Stages)	01. External Temperature Display (F/P)
02. Screw & Barrel (Nitrided barrel)	02. Ejector Interlock Connector (WJ Standard, EM13)	02. Hydraulic Auto-Clamp unit
03. Screw & Barrel (Anti Wear & Corrosive)	03. Hydraulic Core Puller (2~8 Stages)	03. Heater Insulation Band
04. Valve Gate Circuit & Connector (Interior type)	04. Daylight Extension	04. Robot Interface (EM12, EM 67, SPI)
05. Pneumatic Valve Gate Block (Interior type)	05. Hydraulic Core Check Valve	05. CMS (Central Monitoring System)
06. Shut-off Nozzle (Pneumatic, Hydraulic, Spring)	06. Hydraulic Core Interlock Connector (EM13, WJ Standard)	06. AVR (Automatic Voltage Regulator) on Electric Panel
07. Customized Design Screw (SB, Mixing, Coating)	07. Ejector Check Valve	07. UPS (Uninterrentable Power Supply) on Electric Panel
	08. Mold Insulation Plate	08. Dosing unit Interface (for Masterbatch)
		09. Gas Injection Interface
		10. Steam Injection Interface
		11. Interior type Hot Runner Controller (EM14, WJ Standard)
		12. Controller Moving device

Injection Unit	Clamping Unit	General
Standard		
01. Single Flight Screw	01. Clamping area Curtain sensor	01. Clamp area safety sensor (Vertical type IMM)
02. Injection valve gate circuit (AC 1 + DC 1)	02. Working Foot-board (Above 120ton)	02. Standard Maintenance tools
03. PID Heating Control	03. Hydraulic Core puller (Moving platen side, 1 stage)	03. Standard spare part
04. Weekly Heating Timer	04. Air blow-off unit (1 ea, Upper part)	04. Leveling pad
05. Cold screw start protection mode	05. Safety device(for electric & hydraulic)	05. Cooling water distributor
06. Temperature display & Alarm in abnormal Temp.	06. Mold-Open Speed & Pressure step (4 step)	06. Automatic grease lubrication (Clamping)
07. Auto Purging	07. Mold-Close Speed & Pressure step (5 step)	07. Robot interface (Standard)
08. Injection Speed & Pressure step (10 step)	08. Ejector Speed & Pressure step (2 step)	08. 3 Phase electric outlet (2 ea)
09. Holding Speed & Pressure step (5 step)		09. Single Phase electric outlet (1 ea)
10. Charging Speed & Pressure step (3 step)		10. Hopper throat temperature control device
11. Back Pressure control step (3 step)		11. Hydraulic oil purification device
12. Injection Pressure Graph Display		12. Hydraulic oil temperature control device
13. Injection Speed Graph Display		13. Hydraulic oil level alarm
14. Screw RPM Display		14. Hydraulic oil temperature check & alarm
15. Cushion Display & Alarm		15. Hydraulic oil heating mode
16. Charging time count & alarm		16. 3 color alarm light
17. Screw & Barrel (Anti Wear)		17. Shot data saving by external way
		18. Production data statistics
		19. Alarming & History save
		20. Log history save
		21. I/O circuit display
Option		
01. Heater Disconnection check device	01. Daylight Extension	01. Hydraulic Auto-Clamp unit
02. Screw & Barrel (Nitrided barrel)	02. Hydraulic Core Check Valve	02. Heater Insulation Band
03. Screw & Barrel (Anti Wear & Corrosive)	03. Hydraulic Core Interlock Connector (EM13, WJ Standard)	03. Robot Interface (EM12, EM 67, SPI)
04. Valve Gate Circuit & Connector (Interior type)	04. Hydraulic Core (Rotary table type)	04. CMS (Central Monitoring System)
05. Pneumatic Valve Gate Block (Interior type)	05. Ejector Check Valve	05. AVR (Automatic Voltage Regulator) on Electric Panel
06. Shut-off Nozzle (Pneumatic, Hydraulic, Spring)	06. Ejector Interlock Connector (WJ Standard, EM13)	06. UPS (Uninterruptible Power Supply) on Electric Panel
07. Customized Design Screw (SB, Mixing, Coating)	07. Mold Insulation Plate	07. Dosing unit Interface (for Masterbatch)
	08. Pneumatic Core Puller (1-3 Stages)	08. Gas Injection Interface
		09. Steam Injection Interface
		10. External Temperature Display (F/P)
		11. Interior type Hot Runner Controller (EM14, WJ Standard)
		12. Controller Moving device

Injection Unit	Clamping Unit	General
Standard		
01. Single Flight Screw 02. Injection valve gate circuit (AC 1 + DC 1) 03. PID Heating Control 04. Weekly Heating Timer 05. Cold screw start protection mode 06. Temperature display & Alarm in abnormal Temp. 07. Auto Purging 08. Injection Speed & Pressure step (10 step) 09. Holding Speed & Pressure step (5 step) 10. Charging Speed & Pressure step (3 step) 11. Back Pressure control step (3 step) 12. Injection Pressure Graph Display 13. Injection Speed Graph Display 14. Screw RPM Display 15. Cushion Display & Alarm 16. Charging time count & alarm 17. Screw & Barrel (Anti Wear)	01. Clamping area Curtain sensor 02. Hydraulic Core puller (Moving platen side, 1 stage) 03. Air blow-off unit (1 ea, Upper part) 04. Safety device(for electric & hydraulic) 05. Mold-Open Speed & Pressure step (4 step) 06. Mold-Close Speed & Pressure step (5 step)	01. Standard Maintenance tools 02. Clamp area safety sensor (Vertical type IMM) 03. Standard spare part 04. Leveling pad 05. Cooling water distributor 06. Automatic grease lubrication (Clamping) 07. Robot interface (Standard) 08. 3 Phase electric outlet (2 ea) 09. Single Phase electric outlet (1 ea) 10. Hopper throat temperature control device 11. Hydraulic oil purification device 12. Hydraulic oil temperature control device 13. Hydraulic oil level alarm 14. Hydraulic oil temperature check & alarm 15. Hydraulic oil heating mode 16. 3 color alarm light 17. Shot data saving by external way 18. Production data statistics 19. Alarming & History save 20. Log history save 21. I/O circuit display
Option		
01. Heater Disconnection check device 02. Screw & Barrel (Nitrided barrel) 03. Screw & Barrel (Anti Wear & Corrosive) 04. Valve Gate Circuit & Connector (Interior type) 05. Pneumatic Valve Gate Block (Interior type) 06. Shut-off Nozzle (Pneumatic, Hydraulic, Spring) 07. Customized Design Screw (SB, Mixing, Coating)	01. Daylight Extension 02. Hydraulic Core Check Valve 03. Hydraulic Core Interlock Connector (EM13, WJ Standard) 04. Hydraulic Core (Rotary table type) 05. Ejector Check Valve 06. Ejector Interlock Connector (WJ Standard, EM13) 07. Mold Insulation Plate 08. Pneumatic Core Puller (1-3 Stages)	01. Hydraulic Auto-Clamp unit 02. Heater Insulation Band 03. Robot Interface (EM12, EM 67, SPI) 04. CMS (Central Monitoring System) 05. AVR (Automatic Voltage Regulator) on Electric Panel 06. UPS (Uninterruptible Power Supply) on Electric Panel 07. Dosing unit Interface (for Masterbatch) 08. Gas Injection Interface 09. Steam Injection Interface 10. External Temperature Display (F/P) 11. Interior type Hot Runner Controller (EM14, WJ Standard) 12. Controller Moving device

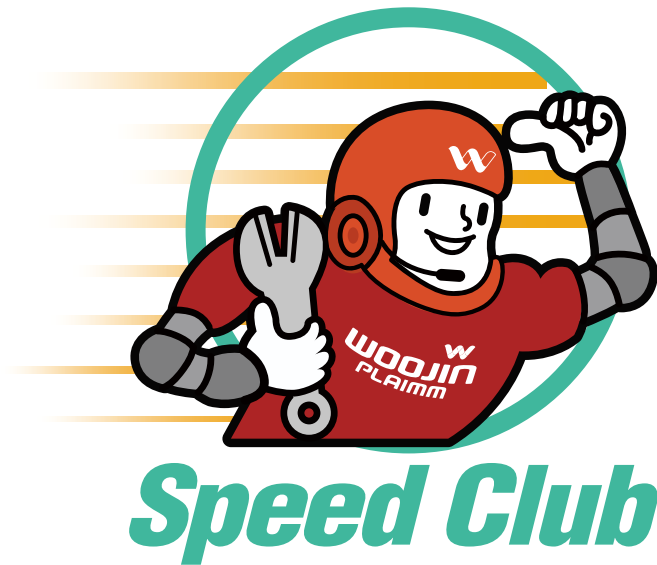

- 1 24-Hour On-Site Support
- 2 Dedicated B/S Team
- 3 Mobile App Support
- 4 Extended Parts Warranty

1 Expert Technical Staff


| Over 10 Years of Experience in Injection Molding (Optimization / Foaming / Trial Injection)

2 Technical Research Team

| Control technology and mechanical design personnel available for ongoing support


3 Auxiliary Facility Support

| Deployment of Skilled Technicians and Consulting Staff

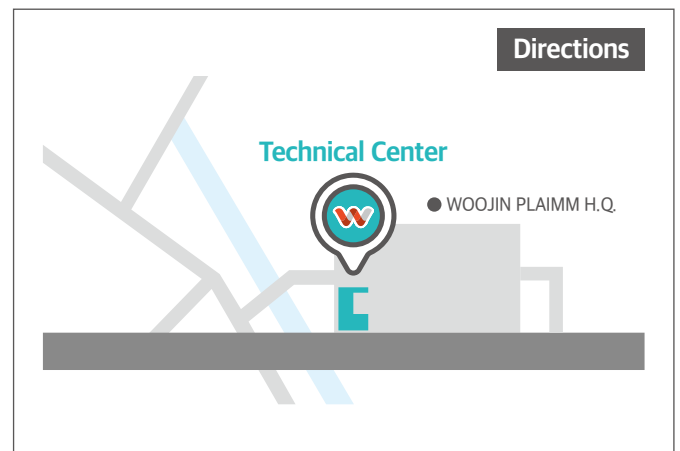

Directions

WOOJIN PLAIMM Technical Center **delivers the best results** to our customers through **strategic consulting** and **technical knowledge sharing**.



Promotion

GLOBAL NETWORK



WOOJIN PLAIMM H.Q.

100, Woojinplaimm-ro, Jangan-myeon, Boeun-gun, Chungcheongbuk-do, Republic of Korea (28913)

Tel. +82 43-540-9000 Fax. +82 43-543-1420 E-mail. info@wjpim.com

SISTER COMPANIES

Austria Inc. office@woojin.at
Vienna T. +43-2256-20413

U.S.A Inc. us@wjpim.com
Chicago T. +1-847-457-1916
Atlanta T. +1-224-500-5085
Detroit T. +1-334-332-8597

Mexico Inc. mx@wjpim.com
Monterrey T. +52-81-4452-0851
Queretaro T. +52-81-1555-4286
Tijuana T. +52-81-1555-4224

China Inc. cn@wjpim.com
Ningbo T. +86-574-8680-6088
Guangdong T. +86-135-4938-2580
Suzhou T. +86-186-6787-5052

BRANCH OFFICE

Türkiye office@woojin.at
Istanbul T. +90-216-290-1483

Slovakia sk@wjpim.com
Zilina T. +421-903-207-420

Poland ploffice@wjpim.com
Katowice T. +48-513-211-177

Russia ru@wjpim.com
Moscow T. +7-495-245-0073

Thailand th@wjpim.com
Bangkok T. +66-2-745-4746
Chonburi T. +66-33-138-848

India india1@wjpim.com
Chennai T. +91-77081-80333
Anantapur T. +91-77081-54222

Malaysia my@wjpim.com
Kuala Lumpur T. +60-3-7887-0590
Johor Bahru T. +60-7-2121-322

Indonesia id@wjpim.com
Jakarta T. +62-21-8370-1281
Cikarang T. +62-21-8977-4613

Vietnam vn@wjpim.com
Bacninh T. +84-22-2390-6797
Hochiminh T. +84-28-3772-0028

Japan jp@wjpim.com
Nagoya T. +81-80-1249-1753

Bangladesh bd.arif@wjpim.com
Dhaka T. +880-19-2563-7935

Philippines philippines2@wjpim.com
Philippines T. +63-49-542-5722



HOME PAGE



YOUTUBE



CopyRight©2026, WOOJIN PLAIMM Co.,Ltd.

- ※ The copyright of this catalog belongs to WOOJIN PLAIMM Co., Ltd. Unauthorized use may result in legal liability under copyright law.
- ※ Product images and specifications are subject to change without prior notice for quality improvement.
- ※ Content updated as of January 2, 2026.

Korea No.1 IMM Manufacturer

WOOJIN PLAIMM Co., Ltd. | 100, Woojinplaimm-ro, Jangan-myeon, Boeun-gun, Chungcheongbuk-do, Republic of Korea
T. +82 43-540-9000 F. +82 43-543-1420 E. info@wjpim.com

