


ENGLISH

TE-AS

Ultra Energy-Saving Toggle Electric Series

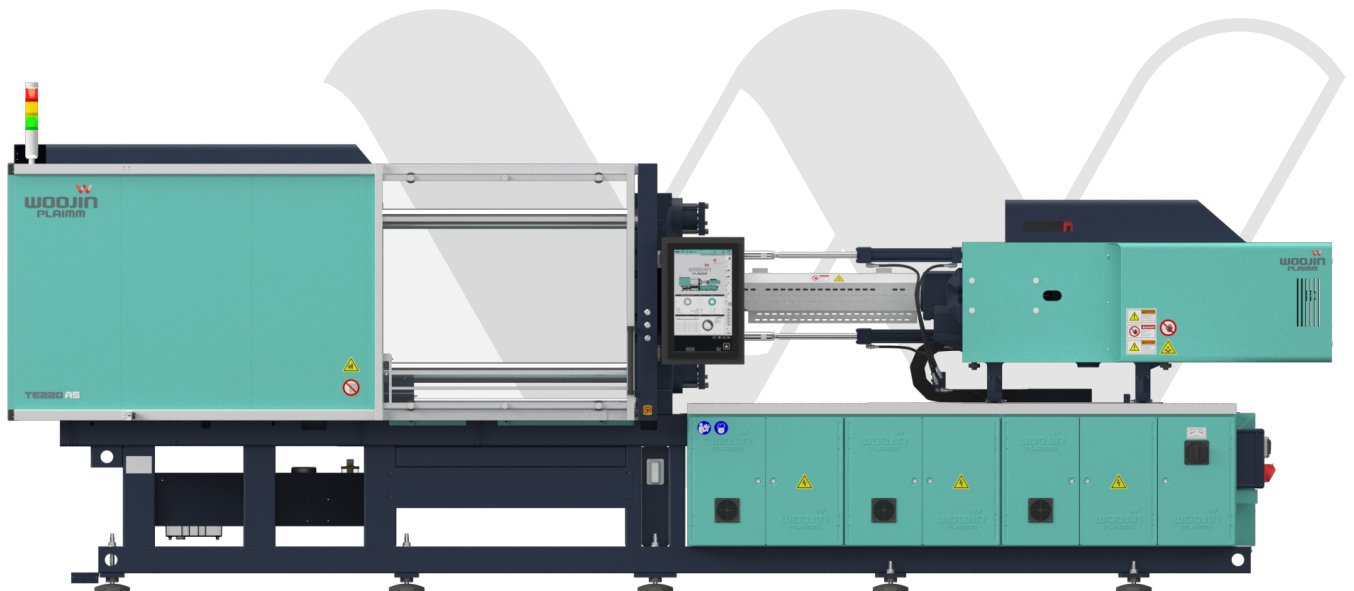

OVERVIEW

ITE-AS


Ultra Energy-Saving Toggle Electric Series



IMM Promotion

An ultra energy-saving electric injection molding machine that enables independent control of each unit with servo motors for faster process performance.

(50~850Ton)

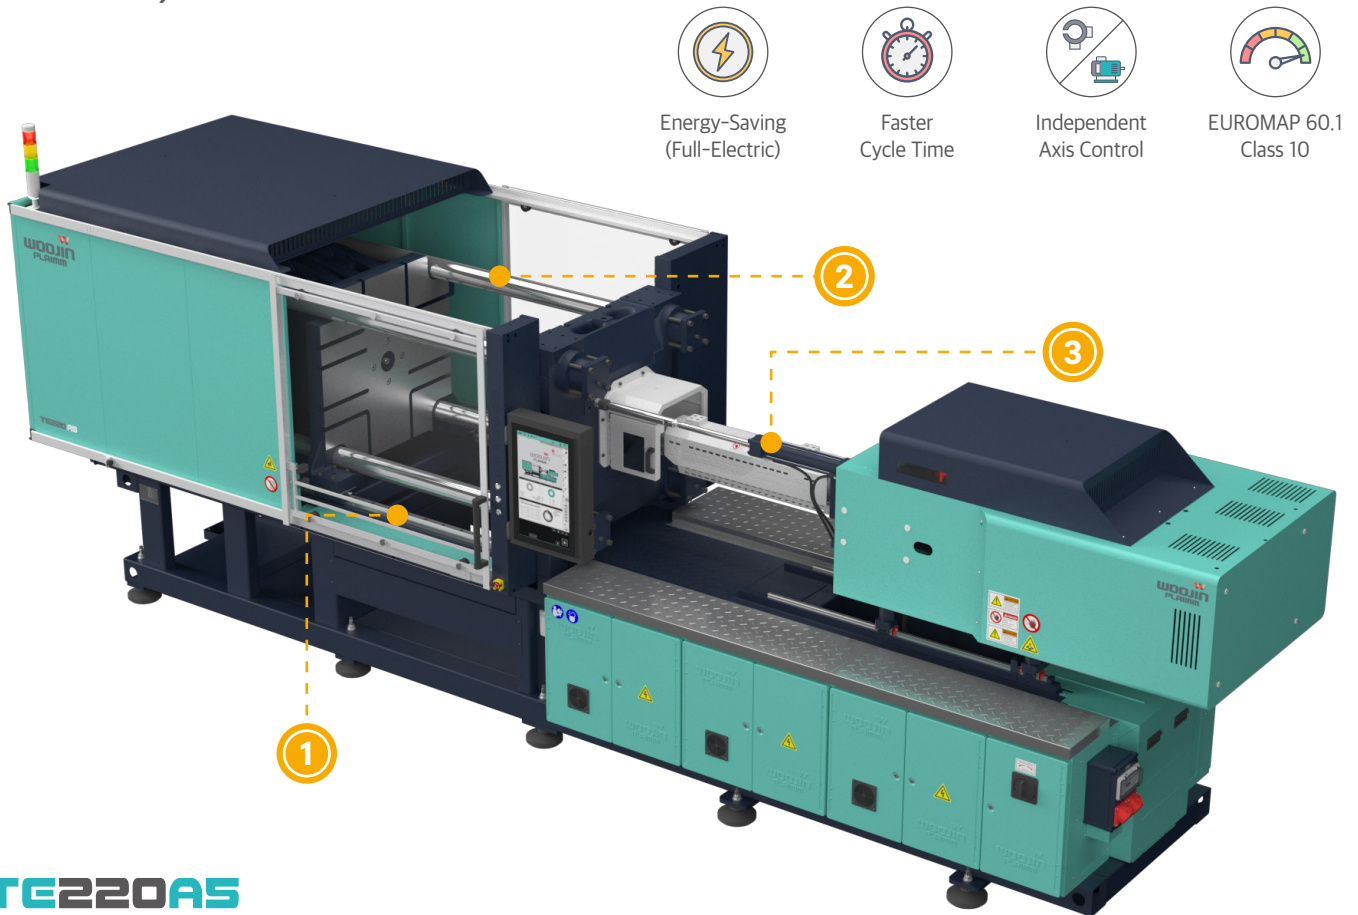

TE220AS

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

★ Electric Power Saving Effect

- | Energy consumption rated “Class 10” according to EUROMAP 60.1
- | Annual savings of approximately Korea Won(KRW) 11.7 million compared to conventional hydraulic machines (Based on a daily production of 300kg)

2 Clean Tie bar

- | Tie-bar bush eliminated by applying L/M guide (no grease injection required)
- | Reduced friction resistance caused by tie-bar bush
- | Improved tie-bar cleanliness and reduced grease consumption

1 Moving Platen with L/M Guide

- | Enables precise position control of the moving platen
- | Reduced force required for platen movement contributes to energy savings
- | Reference surface machining of the L/M guide improves platen parallelism

3 Dual pull nozzle touch cylinder



- | Nozzle touch cylinder with vertically and horizontally symmetrical design
- | Ensures stable touch pressure
- | Prevents platen parallelism issues and improves molding precision

FEATURES


ROBUST PLATEN STRUCTURE

1 Platen FEA Structural Analysis

- | Improves molding precision by ensuring uniform mold clamping surface pressure (EUROMAP 9 applied)
- | Extends mold life through mold deflection analysis and enhances durability by distributing platen stress

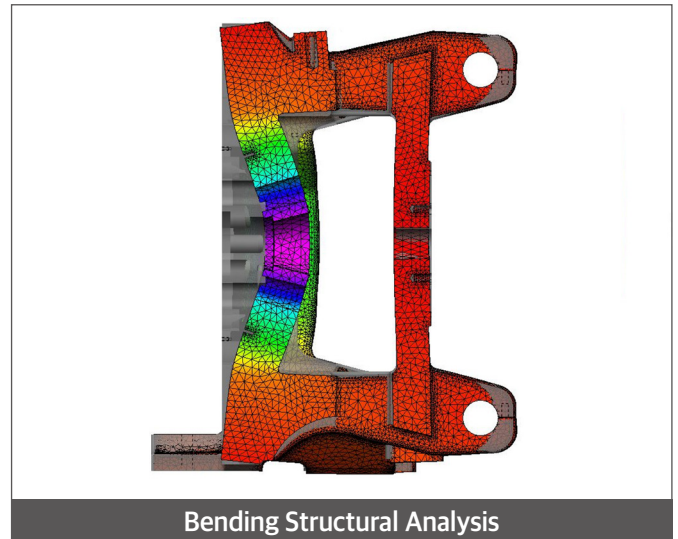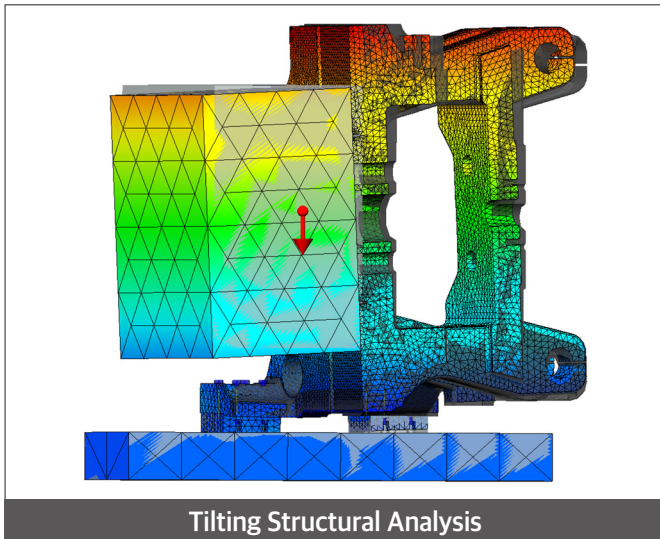


NEW TOGGLE MECHANISM

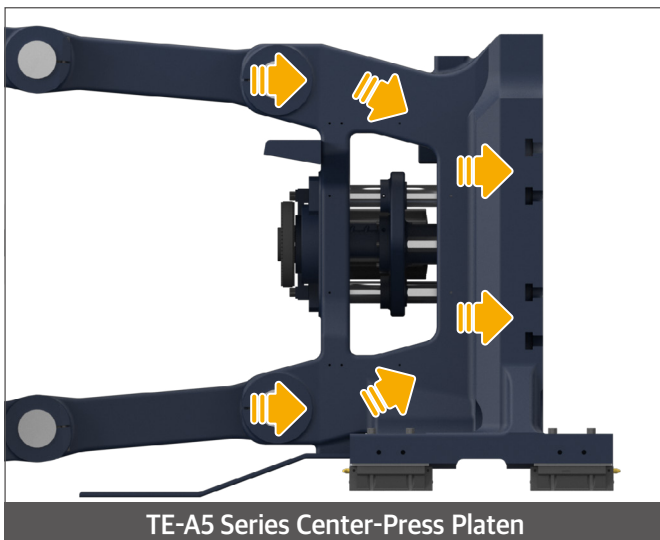

1 Center-Press Platen Design

- | Minimizes mold deformation during mold closing to improve molding precision and extend mold life
- | Maintains uniform surface pressure inside the mold to prevent flash
- | Uniform clamping force distribution enables operation with lower clamping force

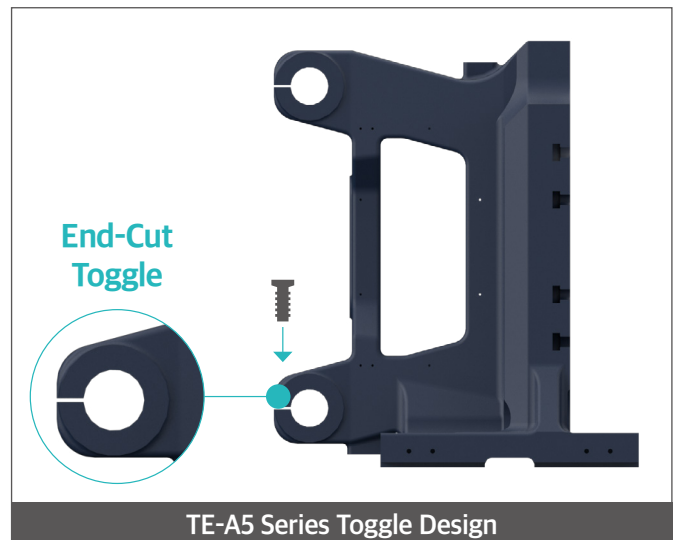


2 End-Cut NEW Toggle Mechanism

- | Approximately 30% improvement in clamping force amplification, increasing servo motor efficiency
- | Optimized design suppresses platen torsional stress during high-speed mold opening and closing for stable operation
- | Clamp-type toggle pin fixing structure enhances durability

FEATURES

AUTOMATIC CLAMPING FORCE COMPENSATION

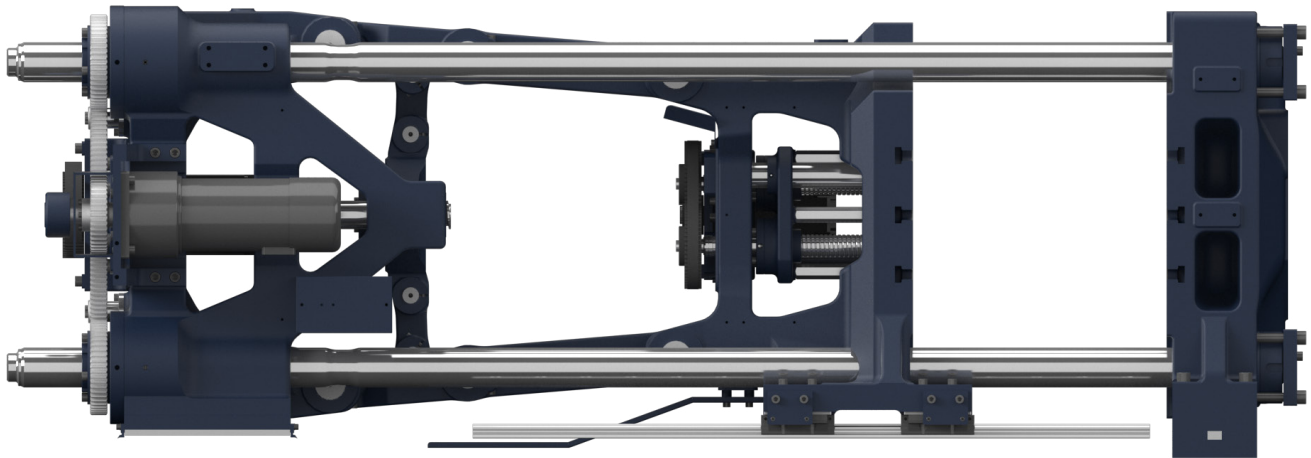

1 Automatic Clamping Force Adjustment Motor

- | clamping force sensor detect real-time changes in clamping force and automatically compensate
- | Maintains consistent clamping force without readjustment due to temperature changes, reducing molding defects

| Automatic Clamping Force Compensation Sequence

- ① Temperature changes in the mold, moving platen, fixed platen, and tie bars
- ② Clamping force variation caused by thermal expansion
- ③ Detection by clamping force sensor
- ④ Controller recognition followed by automatic clamping adjustment

Repeat



Clamping Force Sensor

| The sensor measures the clamping force and automatically compensates to maintain the set clamping force.

2 5-Point Toggle Mechanism

| Clamping Force Amplification


- Maximizes clamping force by stretching the tie bars with minimal driving force

| Energy Saving Effect


- After mold closing, the toggle switches to a locking state, eliminating the need to maintain hydraulic pressure during clamping force boosting, thereby reducing energy consumption

| Mold Protection & Cycle Time Reduction

- The toggle moves quickly in the initial stroke and decelerates in the mold protection zone, enabling mold protection and shorter cycle time

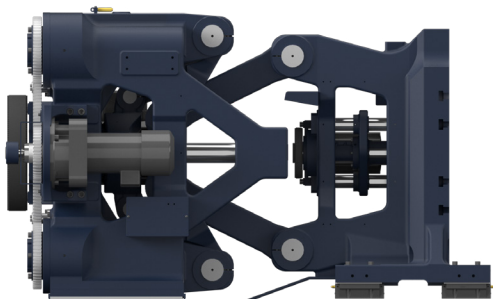

5-Point Toggle Mechanism - Mold Opening View

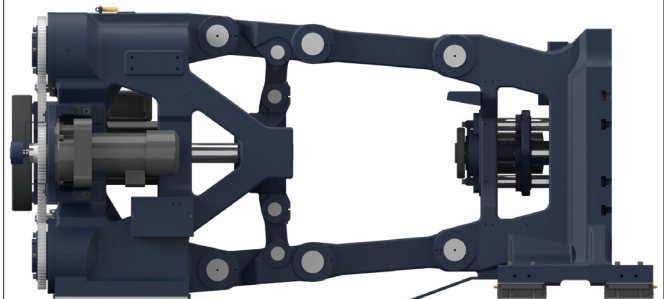


5-Point Toggle Mechanism - Mold Closing View

OPTIMIZED TIE-BAR SPACING

Unit: mm

Tie-Bar Spacing Comparison			
TE Series		TE-A5 Series	
Model	Tie-Bar	Model	Tie-Bar
TE30	310 x 310	-	-
TE50	360 x 360	TE50A5	370 x 370
TE110	410 x 410	TE110A5	470 x 470
TE150	510 x 510	TE170A5	570 x 570
TE220	560 x 560	TE220A5	625 x 625
TE250	610 x 610	TE280A5	670 x 670
TE300	720 x 720	TE280WA5	720 x 720
TE350	820 x 820	TE350A5	770 x 770
-	-	TE400A5	820 x 820
TE450	870 x 870	TE450A5	870 x 870
-	-	TE550A5	980 x 980
-	-	TE650A5	1080 x 1080
-	-	TE850A5	1180 x 1180


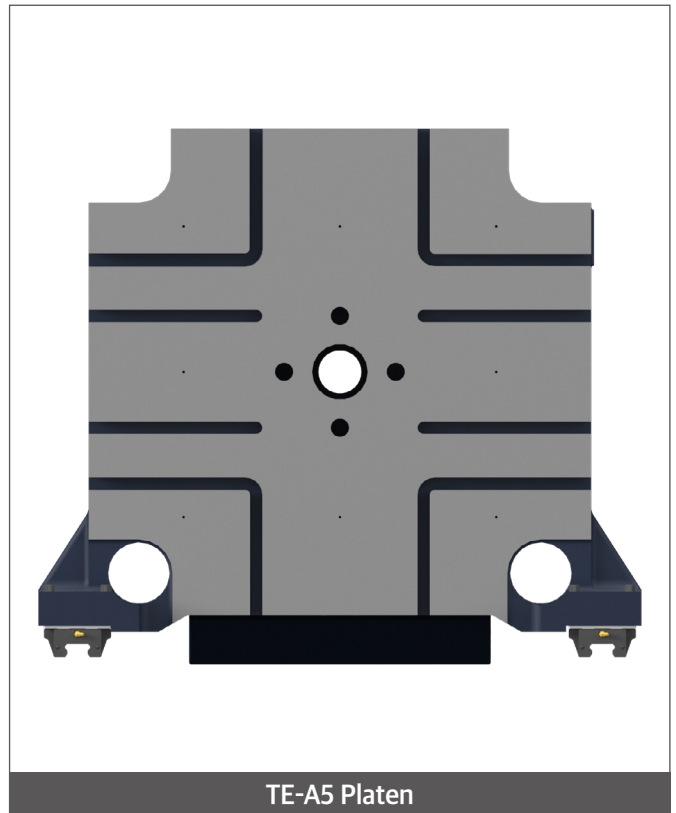


FEATURES


KEBA DRIVE SYSTEM APPLIED

1 Improved Responsiveness & Space Efficiency

- | Compact integrated drive design minimizes control cabinet space
- | Flexible compatibility with the controller ensures an optimized UI/UX environment and reliable drive performance

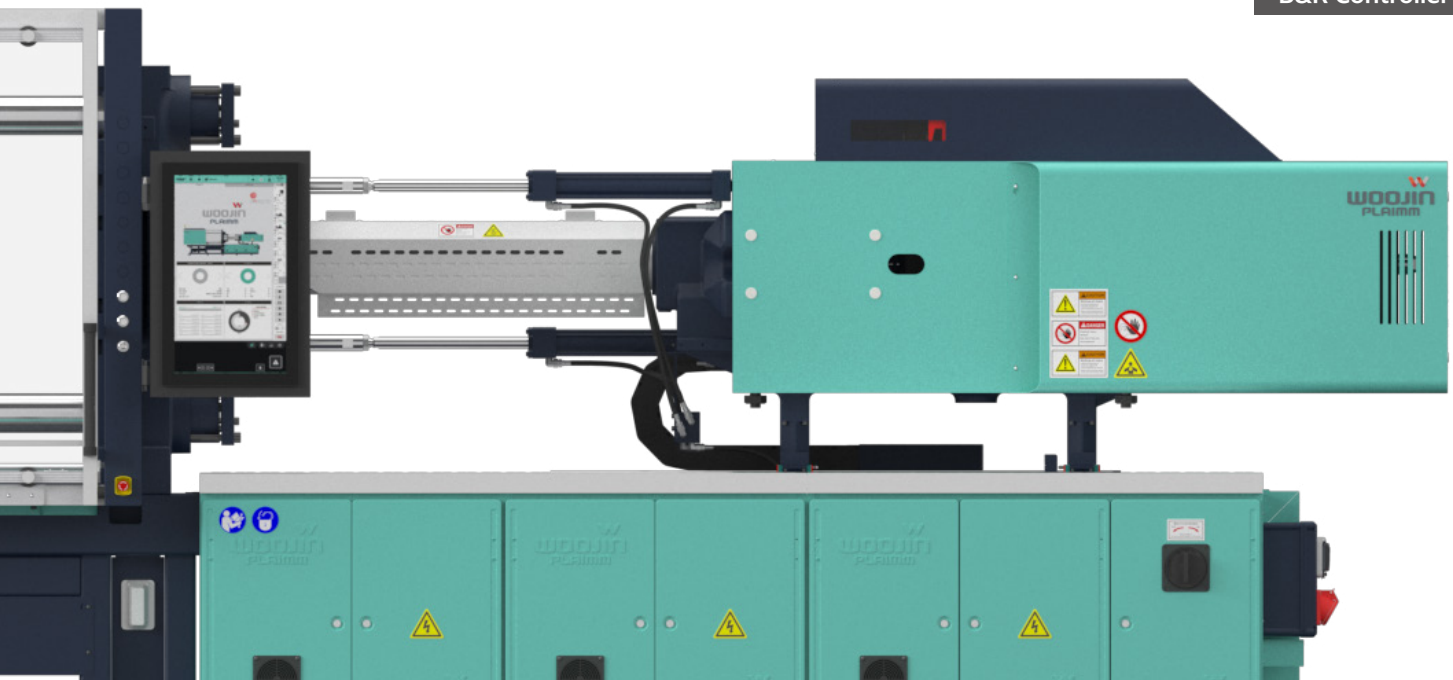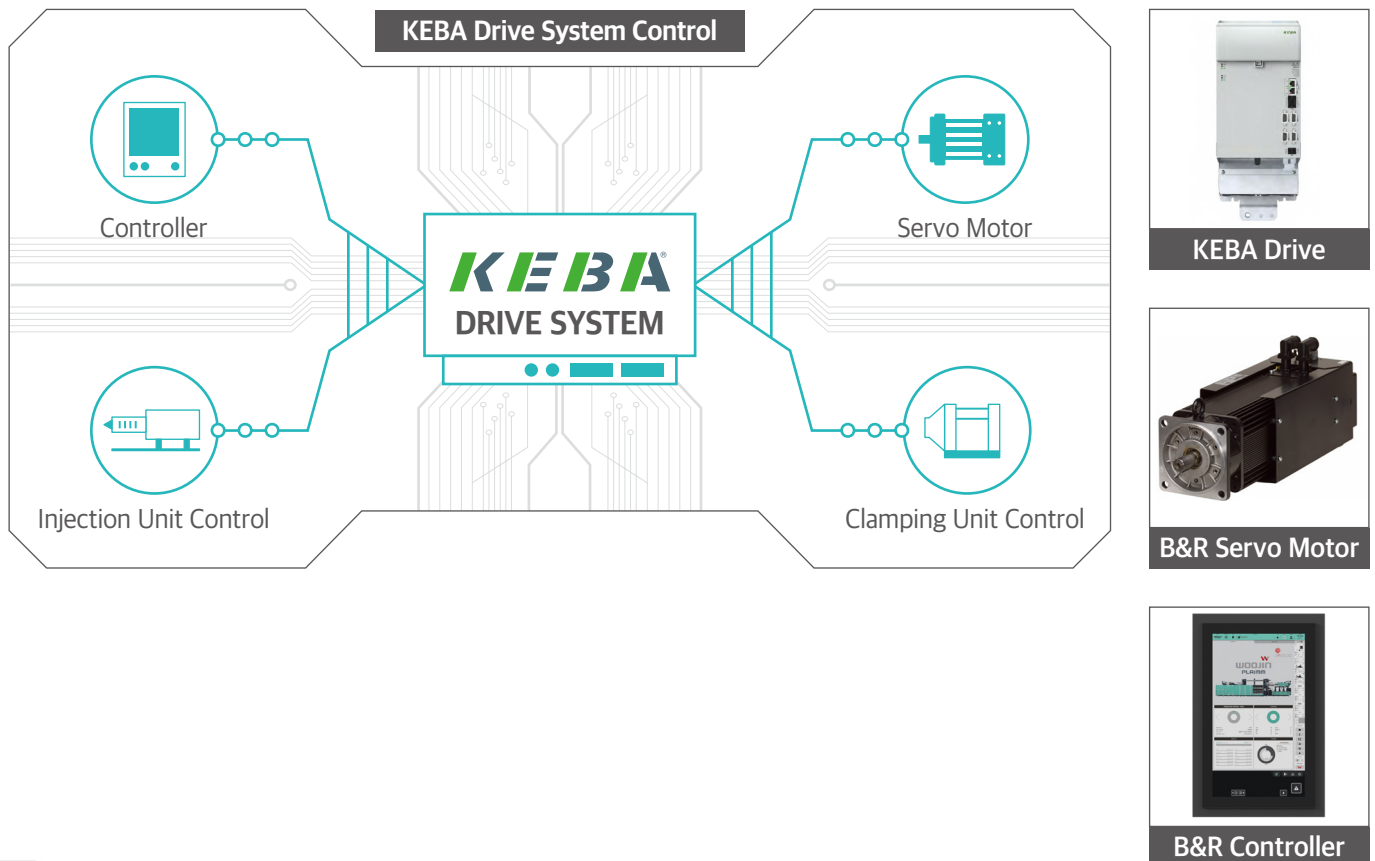


ENHANCED INJECTION UNIT

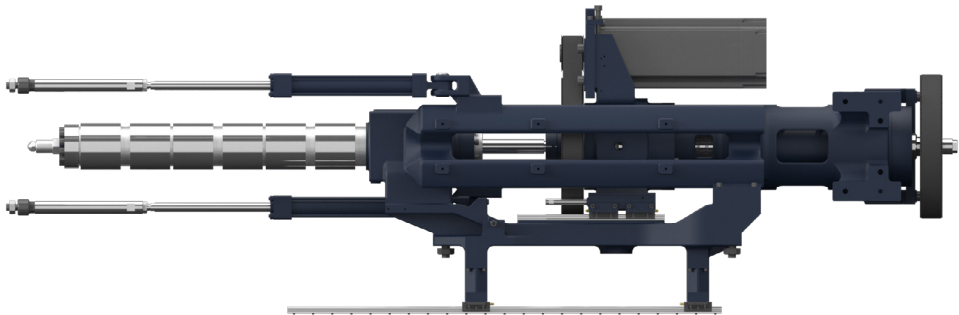

Ball Screw

Minimizes backlash to improve repeatability and positioning accuracy



Load Cell

1 High-Rigidity Integrated Injection Unit

- The injection housing and injection ball screw are manufactured as a single casting
- Reduced cumulative assembly tolerance between the screw and injection drive facilitates precise position and pressure control during injection and metering

2 Precision Molding Control Function

- Uses a precision load cell to detect high-accuracy injection pressure, enabling the molding of ultra-precision products

Detects injection force to enable precise injection pressure conversion and back-pressure control

Applies ultra-high resolution sensors to improve stability during holding pressure transition


Low drift from external factors ensures excellent reproducibility of set values

REDUCED CYCLE TIME

1 Simultaneous Injection Operation Function

- Injection starts (Pre-Injection) when the set clamping force and clamping position are reached during mold closing, allowing simultaneous mold opening during metering and ejector operation during mold opening
- Achieves approximately 15% reduction in cycle time compared to conventional cycles (may vary depending on molding conditions, mold, and peripheral equipment specifications)

Simultaneous Operation Sequence Comparison Example Table

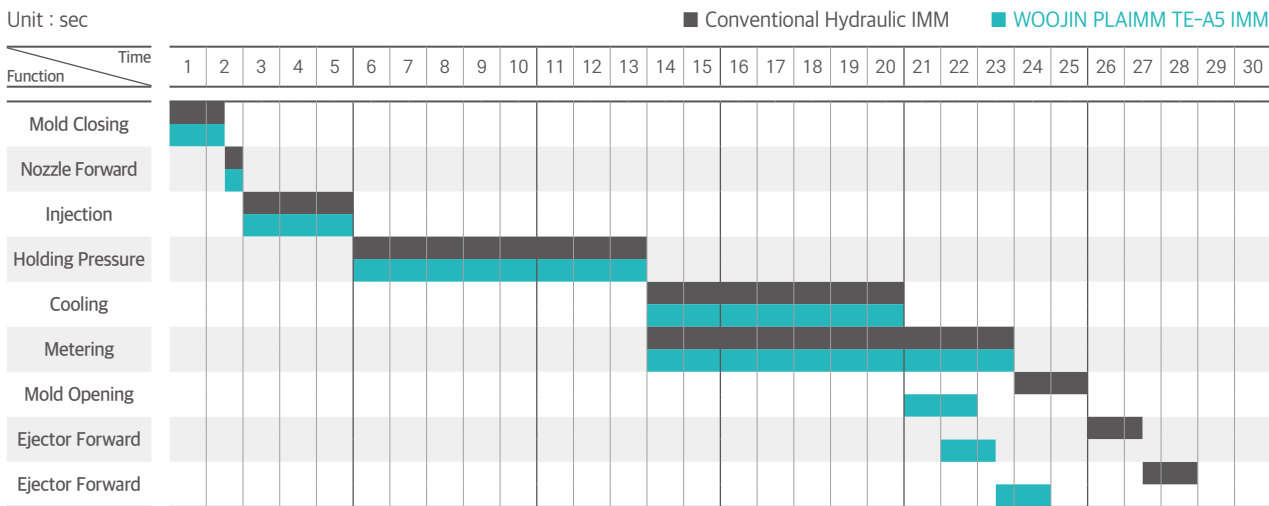

※ Cycle time may vary depending on the ejected product and setting conditions.


FEATURES

ENERGY CONSUMPTION CLASS

- Achieves “Class 10” energy consumption of 0.24 kWh/kg or less based on EUROMAP 60.1
- Reduces electricity costs by more than 60% compared to conventional hydraulic systems using three-phase induction motors



Injection Weight Variation

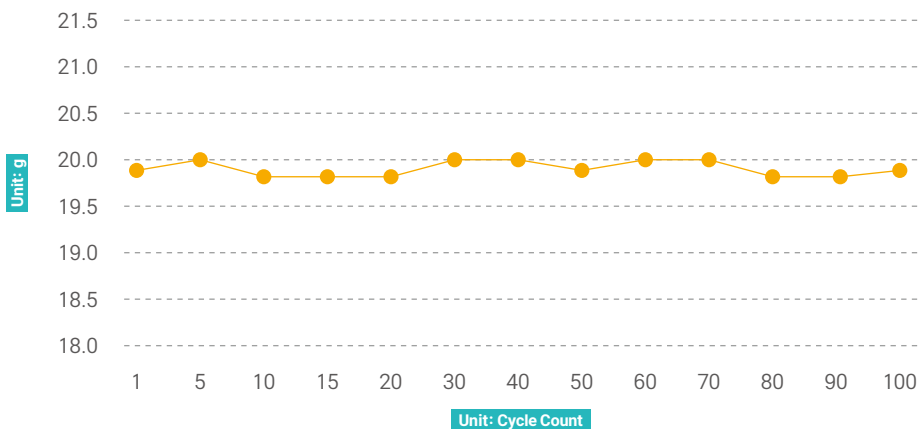

TE110A5

Product	Electronics
Resin	PC
Cavity	1 Cavity

※ Specifications may vary depending on the mold, raw material, and product specifications


CONTROLLER

IMC 510



* The Red Dot Award is a globally prestigious design award, and together with Germany's iF Design Award and the USA's IDEA, it is recognized as one of the world's top three design awards

FEATURES



- Equipped with B&R Controller
- 21-inch Full HD Touch Screen
- User Interface (UI/UX) Optimized for IMM



- Injection process design using Smart Sequence
- Review processes and receive feedback through PLAImm-X
- Process management analysis and energy monitoring




- Supports OPC-UA (EUROMAP 77)
- Data provided via SQL and CSV
- Peripheral device monitoring and remote support services available




- Check operation sequence with Overview Chain
- View clamping and injection graphs on a single page
- Frequently used functions managed through custom tabs

MAIN PAGE SCREEN CONFIGURATION

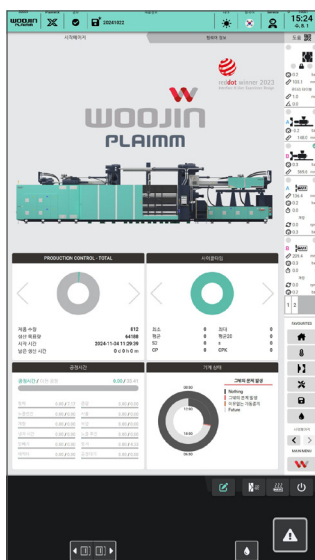


Home

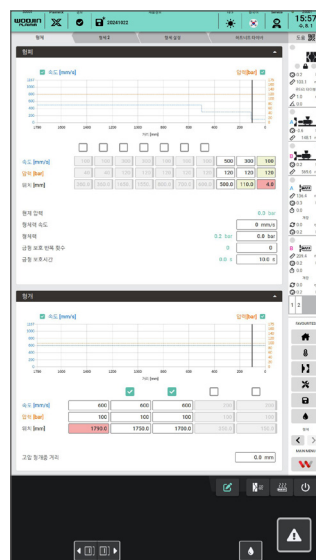

Mold




Injection/Pressure Hold

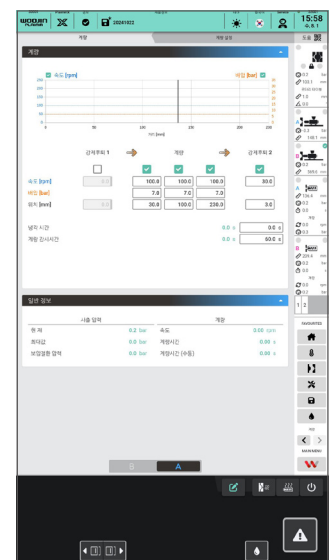


Metering

※ This controller may be changed without prior notice due to optional specifications or software updates.

SMART INJECTION TECHNOLOGY

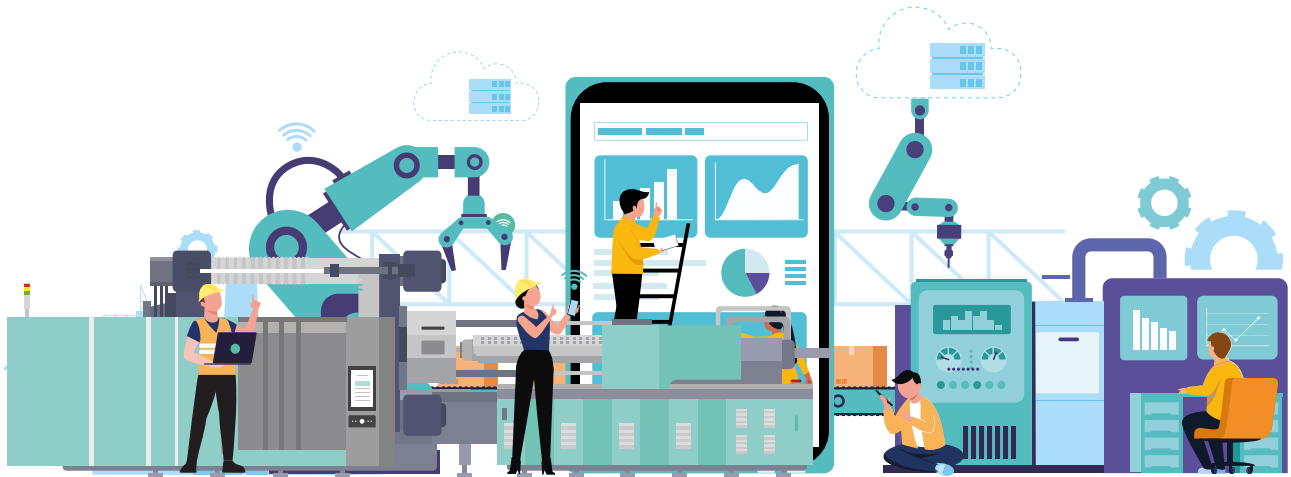

※ Smart injection molding functions may be changed without prior notice due to software updates or product improvements.



1 Flash Monitoring

| A function that detects mold flash occurring during the injection molding process to improve and stabilize product quality

- Direct clamping type: Flash measured by tie-bar position sensor
- Toggle type: Flash measured by clamping force sensor



2 Weight Control

| A function that automatically adjusts holding pressure and metering process settings based on Viscosity Monitoring to minimize injection weight variations caused by changes in molten resin viscosity

| Benefits

- ① Improved quality stability when molding recycled resins or eco-friendly specialty materials
- ② Reduced scrap and improved productivity through defect reduction
- ③ Supports environmental initiatives such as carbon neutrality and SDGs



3 Smart Sequencer

| A function that enables flexible operation configuration in the automatic mode of the injection molding machine

| Allows easy setup of special operation sequences and automatically calculates axis interlocks to ensure equipment safety




4 Edge Controller

- | Data integration converter function for peripheral devices via 4-channel RS485 communication
- | Connectable with various peripheral equipment such as mold temperature controllers, dryers, chillers, and hot runner controllers
- | Capable of collecting peripheral device data and transmitting it to a cloud server




5 Energy Monitoring

- | Displays energy consumption separately for hydraulic or electric systems and cylinder heating
- | Measures and displays energy consumption by each stage of the injection molding process (Mold Closing / Injection / Holding / Metering / Cooling / Mold Opening / Ejector)
- | Helps reduce power consumption by comparing energy usage during production and downtime



6 Machine Test

- | A function that allows easy inspection and testing of the injection molding machine status
- | Enables periodic machine maintenance even for first-time users
- | Provides test functions for clamping force, injection pressure, and injection speed (additional Machine Test items planned)



7 Mold Recognition

(Coming Soon)

- | A function that enables one-touch setup of recipes for the injection molding machine, take-out robot, and peripheral equipment using mold ID information
- | Mold ID can be selected from RF-ID, QR code, or barcode



8 Data Collection Function

(Coming Soon)

- | A function that provides detailed time-series data from the injection molding machine
 - Data requiring detailed analysis
 - ① Actual and set values of injection pressure, speed, and position
 - ② clamping pressure, speed, position, and four tie-bar data
 - ③ Includes 2K (Injection A / B) data
 - Data with minimal variation
 - ① Temperature data (nozzle, barrel, hopper, hydraulic oil, etc.)
 - ② includes shot-based data for quality analysis

SPECIFICATIONS

MODEL		TE50A5									TE110A5									
Injection Unit		IE70				IE125			IE260			IE125			IE260			IE370		
Screw & Barrel type		S	O	A	B	O	A	B	O	A	B	O	A	B	O	A	B	O	A	B
Screw diameter	mm	16	18	20	22	22	25	28	28	32	36	22	25	28	28	32	36	32	36	40
Injection pressure	kg/cm²	2800	2597	2103	1738	2610	2021	1612	2644	2024	1599	2610	2021	1612	2644	2024	1599	2573	2033	1647
	Mpa	275	255	206	170	256	198	158	259	198	157	256	198	158	259	198	157	252	199	162
Injection holding pressure	kg/cm²	2520	2337	1893	1564	2349	1819	1451	2380	1822	1439	2349	1819	1451	2380	1822	1439	2316	1830	1482
	Mpa	247	229	186	153	230	178	142	233	179	141	230	178	142	233	179	141	227	179	145
Theoretical injection volume	cm³	20	25	31	38	48	61	77	99	129	163	48	61	77	99	129	163	145	183	226
Shot weight (PS)	g	18	23	28	35	44	56	70	90	117	148	44	56	70	90	117	148	132	167	206
Injection rate (standard)	cm³/s	70	89	110	133	95	123	154	132	173	219	95	123	154	132	173	219	161	204	251
Injection rate (optional)	cm³/s	141	178	220	266	190	245	308	265	346	438	190	245	308	265	346	438	322	407	503
Screw stroke	mm	100				125			160			125			160			180		
Injection speed (standard)	mm/s	350				250			215			250			215			200		
Injection speed (optional)	mm/s	700				500			430			500			430			400		
Plasticizing capacity (PS)	kg/h	12	17	24	29	29	41	54	45	64	92	29	41	54	45	64	92	60	86	117
Screw rotation speed	rpm	470				470			400			470			400			375		
Clamping Unit																				
Clamping force	ton(kN)	50(490)									110(1078)									
Distance between tie-bar (H×V)	mm	370 x 370									470x470									
Platen dimension (H×V)	mm	550 x 550									680x680									
Daylight	mm	300									400									
Max. Daylight	mm	700									850									
Min. mold height	mm	140									150									
Max. mold height	mm	400									450									
Ejector force	ton(kN)	1.9(19)									3.1(31)									
Ejector stroke	mm	80									120									
General																				
Motor capacity (standard)	kW	11							15.1			11			15.1			17.8		
Motor capacity (optional)	kW	22							30.2			22			30.2			35.6		
Heater capacity	kW	3.6	3.9	4.3	4.7	4.5	5.1	5.9	7.0	7.8	9.1	4.5	5.1	5.9	7.0	7.8	9.1	8.5	9.9	11.2
Total electric power capacity (normal)	kW	14.6	14.9	15.3	15.7	15.5	16.1	16.9	22.1	22.9	24.2	15.5	16.1	16.9	22.1	22.9	24.2	26.3	27.7	29.0
Total electric power capacity (High)	kW	25.6	25.9	26.3	26.7	26.5	27.1	27.9	37.2	38.0	39.3	26.5	27.1	27.9	37.2	38.0	39.3	44.1	45.5	46.8
Machine weight	ton	3.9							4.2			4.5			4.7			5.2		
Machine dimension (L×W×H)	m	4. 2x 1.3 x 1.7							-			-			5.0 x 1.3 x 1.8			-		

01. The oretical injection volume: cross section of screw*screw stroke.
 02. The minimum mold size must be at least 70% of the tie bar distance.
 03. The specifications might be changed without any prior notice.

04. The metering distance is recommended in the arnge of 1 to 3 times of screw diamteer.
 05. Machine dimensions may vary when the injection unit moves UP or DOWN.

TE170A5									TE220A5								
IE260			IE370			IE520			IE370			IE520			IE720		
O	A	B	O	A	B	O	A	B	O	A	B	O	A	B	O	A	B
28	32	36	32	36	40	36	40	45	32	36	40	36	40	45	40	45	50
2644	2024	1599	2573	2033	1647	2541	2059	1627	2573	2033	1647	2541	2059	1627	2605	2058	1667
259	198	157	252	199	162	249	202	160	252	199	162	249	202	160	255	202	163
2380	1822	1439	2316	1830	1482	2287	1853	1464	2316	1830	1482	2287	1853	1464	2345	1852	1500
233	179	141	227	179	145	224	182	144	227	179	145	224	182	144	230	182	147
99	129	163	145	183	226	204	251	318	145	183	226	204	251	318	276	350	432
90	117	148	132	167	206	186	228	289	132	167	206	186	228	289	251	319	393
132	173	219	161	204	251	163	201	254	161	204	251	163	201	254	188	239	295
265	346	438	322	407	503	326	402	509	322	407	503	326	402	509	377	477	589
160			180			200			180			200			220		
215			200			160			200			160			150		
430			400			320			400			320			300		
45	64	92	60	86	117	86	117	158	60	86	117	86	117	158	117	158	213
400			375			375			375			375			375		
170(1667)									220(2157)								
570x570									625x625								
840x790									900x870								
500									550								
1000									1150								
180									200								
500									600								
3.4(34)									3.4(34)								
150									180								
15.1			17.8			17.8			17.8			17.8			23.1		
30.2			35.6			35.6			35.6			35.6			46.2		
7.0	7.8	9.1	8.5	9.9	11.2	9.9	11.2	12.6	8.5	9.9	11.2	9.9	11.2	12.6	13.6	14.6	17.1
22.1	22.9	24.2	26.3	27.7	29.0	27.7	29.0	30.4	26.3	27.7	29.0	27.7	29.0	30.4	36.7	37.7	40.2
37.2	38.0	39.3	44.1	45.5	46.8	45.5	46.8	48.2	44.1	45.5	46.8	45.5	46.8	48.2	59.8	60.8	63.3
7			7.5			8			9.7			10.3			10.8		
-			5.7 x 1.6 x 2.0			-			-			6.2 x 1.7 x 2.1			-		

SPECIFICATIONS

MODEL		TE280A5									TE280WA5								
Injection Unit		IE520			IE720			IE1000			IE720			IE1000			IE1360		
Screw & Barrel type		O	A	B	O	A	B	O	A	B	O	A	B	O	A	B	O	A	B
Screw diameter	mm	36	40	45	40	45	50	45	50	55	40	45	50	45	50	55	50	55	60
Injection pressure	kg/cm²	2541	2059	1627	2605	2058	1667	2525	2045	1690	2605	2058	1667	2525	2045	1690	2472	2043	1716
	Mpa	249	202	160	255	202	163	248	201	166	255	202	163	248	201	166	242	200	168
Injection holding pressure	kg/cm²	2287	1853	1464	2345	1852	1500	2273	1841	1521	2345	1852	1500	2273	1841	1521	2225	1839	1544
	Mpa	224	182	144	230	182	147	223	180	149	230	182	147	223	180	149	218	180	151
Theoretical injection volume	cm³	204	251	318	276	350	432	398	491	594	276	350	432	398	491	594	530	641	763
Shot weight (PS)	g	186	228	289	251	319	393	362	447	541	251	319	393	362	447	541	482	583	694
Injection rate (standard)	cm³/s	163	201	254	188	239	295	239	295	356	188	239	295	239	295	356	295	356	424
Injection rate (optional)	cm³/s	326	402	509	377	477	589	477	589	713	377	477	589	477	589	713	589	713	848
Screw stroke	mm	200			220			250			220			250			270		
Injection speed (standard)	mm/s	160			150			150			150			150			150		
Injection speed (optional)	mm/s	320			300			300			300			300			300		
Plasticizing capacity (PS)	kg/h	86	117	158	117	158	213	158	213	273	117	158	213	158	213	273	142	182	233
Screw rotation speed	rpm	375			375			300			375			300			250		
Clamping Unit																			
Clamping force	ton(kN)	280(2745)									280(2745)								
Distance between tie-bar (H×V)	mm	670x670									720x720								
Platen dimension (H×V)	mm	970x980									1020x1020								
Daylight	mm	600									650								
Max. Daylight	mm	1250									1350								
Min. mold height	mm	250									300								
Max. mold height	mm	650									700								
Ejector force	ton(kN)	4.3(43)									4.3(43)								
Ejector stroke	mm	200									200								
General																			
Motor capacity (standard)	kW	23.1			23.1			32.7			23.1			32.7			32.7		
Motor capacity (optional)	kW	35.6			46.2			65.4			46.2			65.4			65.4		
Heater capacity	kW	9.9	11.2	12.6	13.6	14.6	17.1	14.6	17.1	18.7	13.6	14.6	17.1	14.6	17.1	18.7	19.1	21.0	23.8
Total electric power capacity (normal)	kW	33.0	34.3	35.7	36.7	37.7	40.2	47.3	49.8	51.4	36.7	37.7	40.2	47.3	49.8	51.4	51.8	53.7	56.5
Total electric power capacity (High)	kW	45.5	46.8	48.2	59.8	60.8	63.3	80.0	82.5	84.1	59.8	60.8	63.3	80.0	82.5	84.1	84.5	86.4	89.2
Machine weight	ton	14			14.5			15			15.5			16			16.5		
Machine dimension (L×W×H)	m	-			6.9 x 1.8 x 2.1			-			-			7.4 x 1.8 x 2.1			-		

01. The oretical injection volume: cross section of screw*screw stroke.
 02. The minimum mold size must be at least 70% of the tie bar distance.
 03. The specifications might be changed without any prior notice.

04. The metering distance is recommended in the arnge of 1 to 3 times of screw diamteer.
 05. Machine dimensions may vary when the injection unit moves UP or DOWN.

TE350A5									TE400A5								
IE1000			IE1360			IE1700			IE1360			IE1700			IE2800		
O	A	B	O	A	B	O	A	B	O	A	B	O	A	B	O	A	B
45	50	55	50	55	60	55	60	65	50	55	60	55	60	65	65	70	80
2525	2045	1690	2472	2043	1716	2391	2017	1712	2472	2043	1716	2391	2017	1712	2416	2083	1595
248	201	166	242	200	168	234	198	168	242	200	168	234	198	168	237	204	156
2273	1841	1521	2225	1839	1544	2152	1815	1541	2225	1839	1544	2152	1815	1541	2174	1875	1436
223	180	149	218	180	151	211	178	151	218	180	151	211	178	151	213	184	141
398	491	594	530	641	763	713	848	995	530	641	763	713	848	995	1161	1347	1759
362	447	541	482	583	694	649	772	905	482	583	694	649	772	905	1057	1226	1601
239	295	356	295	356	424	356	424	498	295	356	424	356	424	498	498	577	754
477	589	713	589	713	848	713	848	995	589	713	848	713	848	995	-	-	-
250			270			300			270			300			350		
150			150			150			150			150			150		
300			300			300			300			300			-		
158	213	273	142	182	233	163	210	259	142	182	233	163	210	259	230	279	397
300			250			225			250			225			200		
350(3432)									400(3922)								
770x770									820x820								
1160x1090									1210x1140								
700									750								
1450									1550								
300									350								
750									800								
5.7(57)									5.7(57)								
210									210								
32.7			32.7			44.0			32.7			44.0			65.4		
65.4			65.4			88.0			65.4			88.0			-		
14.6	17.1	18.7	19.1	21.0	23.8	21.0	23.8	25.7	19.1	21.0	23.8	21.0	23.8	25.7	18.4	20.6	24.1
47.3	49.8	51.4	51.8	53.7	56.5	65.0	67.8	69.7	51.8	53.7	56.5	65.0	67.8	69.7	83.8	86.0	89.5
80.0	82.5	84.1	84.5	86.4	89.2	109.0	111.8	113.7	84.5	86.4	89.2	109.0	111.8	113.7	-	-	-
16.8			17.3			17.8			21.5			22.0			22.5		
-			8.0 x 1.9 x 2.3			-			-			8.3 x 2.0 x 2.3			-		

SPECIFICATIONS

MODEL		TE450A5									TE550A5								
Injection Unit		IE1700			IE2800			IE4000			IE2800			IE4000			IE5700		
Screw & Barrel type		O	A	B	O	A	B	O	A	B	O	A	B	O	A	B	O	A	B
Screw diameter	mm	55	60	65	65	70	80	70	80	90	65	70	80	70	80	90	80	90	105
Injection pressure	kg/cm²	2391	2017	1712	2416	2083	1595	2657	2034	1607	2416	2083	1595	2657	2034	1607	2543	2009	1476
	Mpa	234	198	168	237	204	156	261	199	158	237	204	156	261	199	158	249	197	145
Injection holding pressure	kg/cm²	2152	1815	1541	2174	1875	1436	2391	1831	1446	2174	1875	1436	2391	1831	1446	2289	1808	1328
	Mpa	211	178	151	213	184	141	235	180	142	213	184	141	235	180	142	224	177	130
Theoretical injection volume	cm³	713	848	995	1161	1347	1759	1539	2011	2545	1161	1347	1759	1539	2011	2545	2262	2863	3897
Shot weight (PS)	g	649	772	905	1057	1226	1601	1400	1830	2316	1057	1226	1601	1400	1830	2316	2058	2605	3546
Injection rate (standard)	cm³/s	356	424	498	498	577	754	577	754	954	498	577	754	577	754	954	754	954	1299
Injection rate (optional)	cm³/s	713	848	995	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Screw stroke	mm	300			350			400			350			400			450		
Injection speed (standard)	mm/s	150			150			150			150			150			150		
Injection speed (optional)	mm/s	300			-			-			-			-			-		
Plasticizing capacity (PS)	kg/h	163	210	259	230	279	397	244	347	458	230	279	397	244	347	458	298	408	618
Screw rotation speed	rpm	225			200			175			200			175			150		
Clamping Unit																			
Clamping force	ton(kN)	450(4413)									550(5394)								
Distance between tie-bar (H×V)	mm	870x870									980x980								
Platen dimension (H×V)	mm	1270x1190									1445x1365								
Daylight	mm	800									900								
Max. Daylight	mm	1600									1850								
Min. mold height	mm	350									400								
Max. mold height	mm	800									950								
Ejector force	ton(kN)	10(100)									14.6(145)								
Ejector stroke	mm	220									220								
General																			
Motor capacity (standard)	kW	44.0			65.4			88.0			65.4			88.0			110.0		
Motor capacity (optional)	kW	88.0			-			-			-			-			-		
Heater capacity	kW	21.0	23.8	25.7	18.4	20.6	24.1	23.0	26.7	30.7	18.4	20.6	24.1	23.0	26.7	30.7	29.4	33.6	39.3
Total electric power capacity (normal)	kW	65.0	67.8	69.7	83.8	86.0	89.5	111.0	114.7	118.7	83.8	86.0	89.5	111.0	114.7	118.7	139.4	143.6	149.3
Total electric power capacity (High)	kW	109.0	111.8	113.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Machine weight	ton	26.2			26.7			27.2			35.7			36.2			36.7		
Machine dimension (L×W×H)	m	-			9.0 x 2.1 x 2.4			-			-			9.9 x 2.5 x 2.2			-		





01. The optimal injection volume: cross section of screw*screw stroke.
02. The minimum mold size must be at least 70% of the tie bar distance.
03. The specifications might be changed without any prior notice.

04. The metering distance is recommended in the range of 1 to 3 times of screw diameter.
05. Machine dimensions may vary when the injection unit moves UP or DOWN.

TE650A5						TE850A5						
IE4000			IE5700			IE8000		IE5700			IE8000	
O	A	B	O	A	B	O	A	O	A	B	O	A
70	80	90	80	90	105	95	105	80	90	105	95	105
2657	2034	1607	2543	2009	1476	2118	1734	2543	2009	1476	2118	1734
261	199	158	249	197	145	208	170	249	197	145	208	170
2391	1831	1446	2289	1808	1328	1906	1561	2289	1808	1328	1906	1561
235	180	142	224	177	130	187	153	224	177	130	187	153
1539	2011	2545	2262	2863	3897	3509	4286	2262	2863	3897	3509	4286
1400	1830	2316	2058	2605	3546	3193	3900	2058	2605	3546	3193	3900
577	754	954	754	954	1299	1063	1299	754	954	1299	1063	1299
-	-	-	-	-	-	-	-	-	-	-	-	-
400			450			495		450			495	
150			150			150		150			150	
-			-			-		-			-	
244	347	458	298	408	618	393	515	298	408	618	393	515
175			150			125		150			125	
650(6374)								850(8336)				
1080x1080								1180x1180				
1560x1480								1710x1650				
1000								1200				
2100								2400				
450								500				
1100								1200				
14.6(145)								20(199)				
230								230				
88.0			110.0			125.6		110.0			125.6	
-			-			-		-			-	
23.0	26.7	30.7	29.4	33.6	39.3	52.7	55.9	29.4	33.6	39.3	52.7	55.9
111.0	114.7	118.7	139.4	143.6	149.3	178.3	181.50	139.4	143.6	149.3	178.3	181.50
-	-	-	-	-	-	-	-	-	-	-	-	-
44			44.5			45		64.5			65	
-			10.5x2.5x2.4			-		-			11.6x2.8x2.5	

PLATEN DIMENSION

Unit: mm

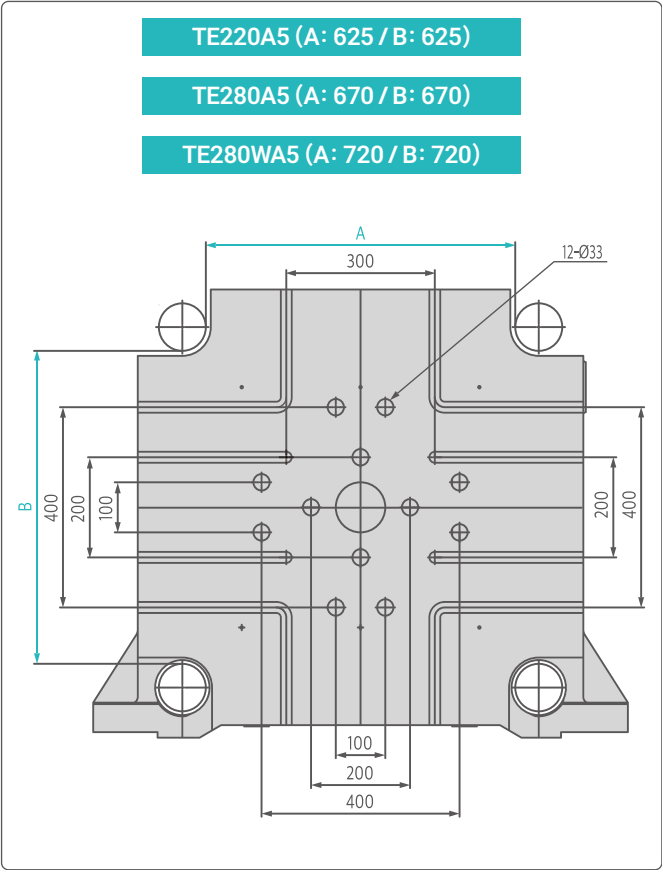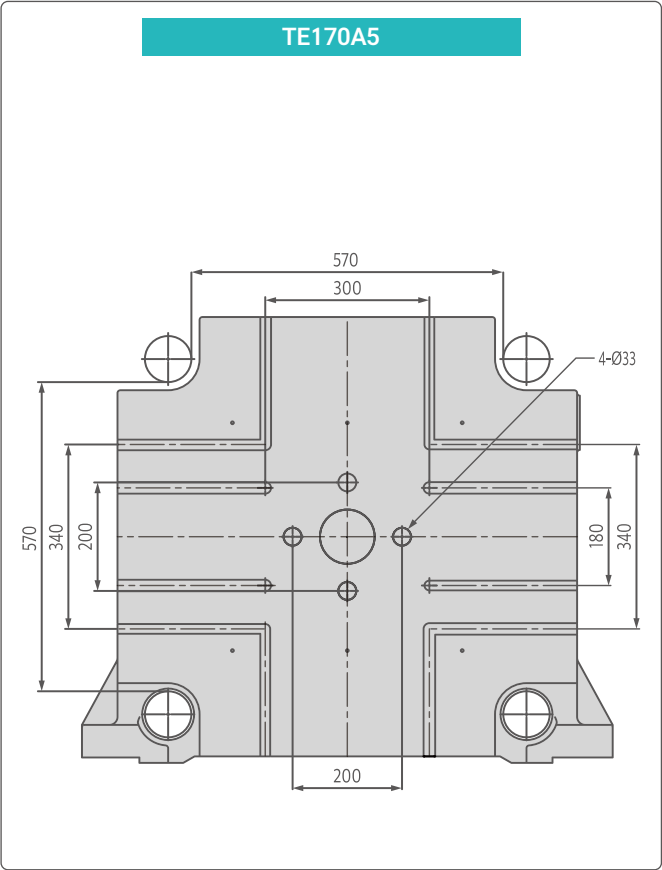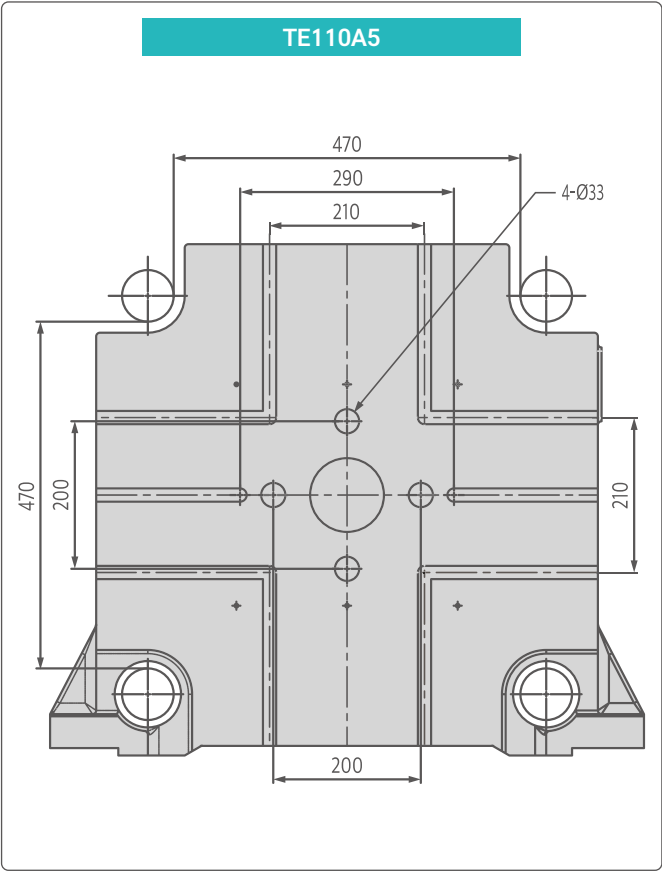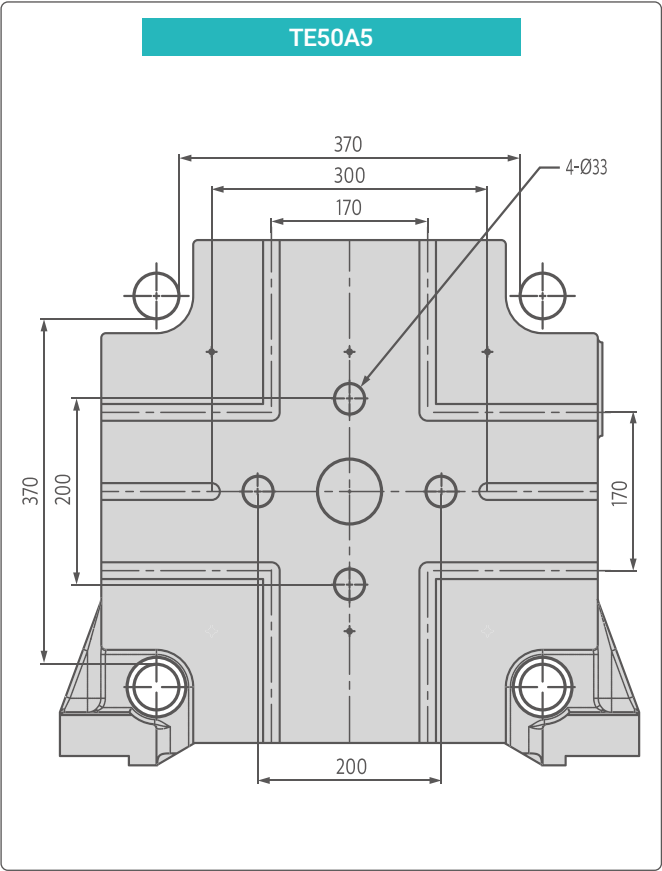


※ Product images may be subject to change without prior notice due to optional specifications or product improvements.


TE350A5 (A: 770 / B: 770)

TE400A5 (A: 820 / B: 820)


TE450A5 (A: 870 / B: 870)

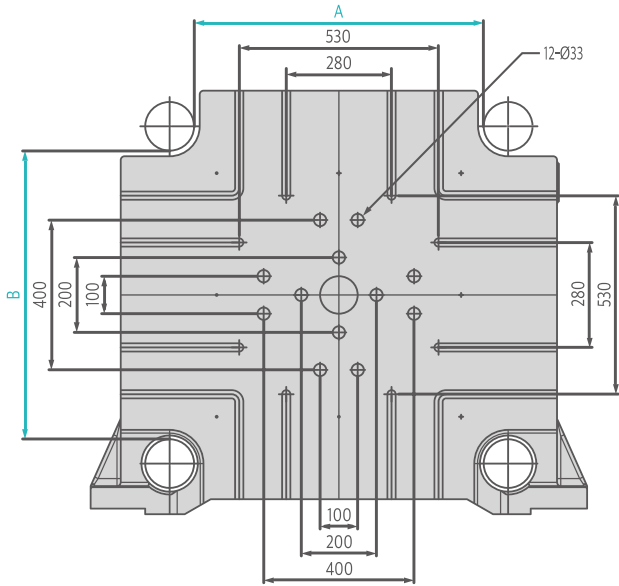


TE550A5

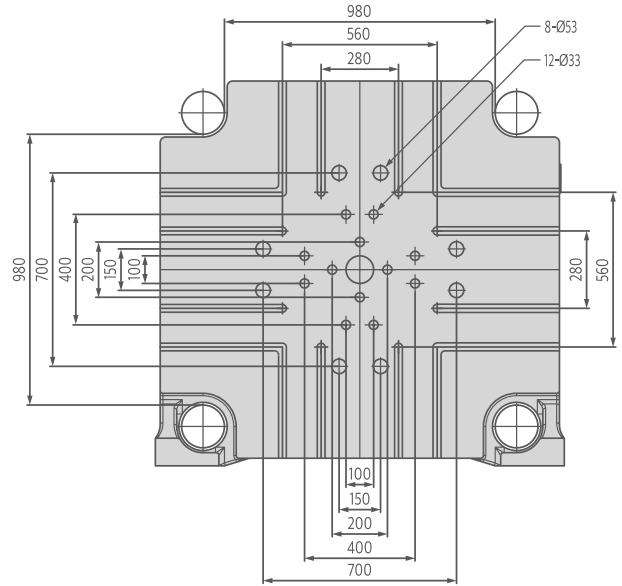

TE650A5

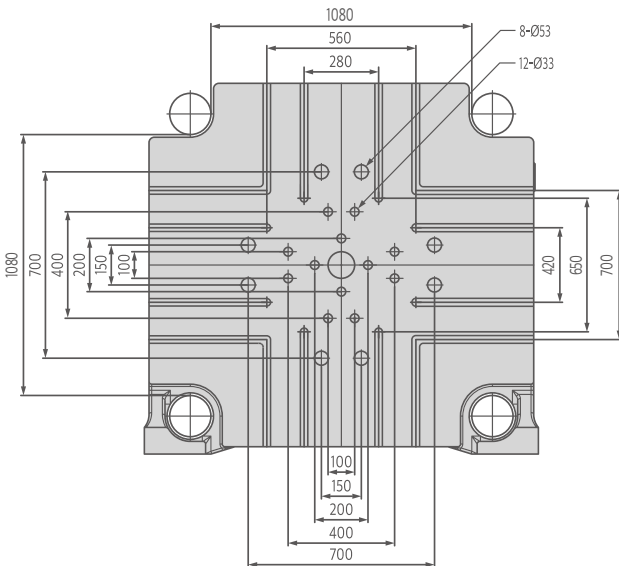


TE850A5

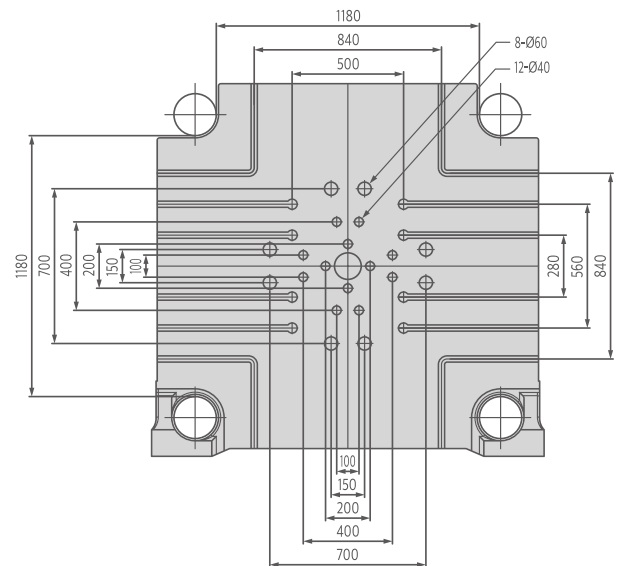


※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

MACHINE DIMENSION

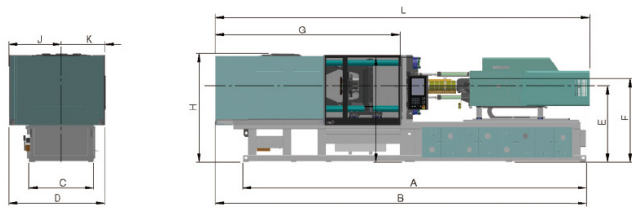




▲ 50Ton~400Ton

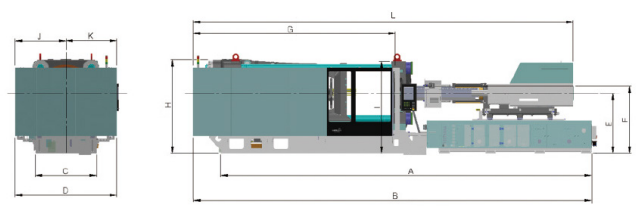

▲ 450Ton~850Ton

Machine Dimension

Unit: mm	A	B	C	D	E	F	G	H	I	J	K	L
TE50A5	3560	4067	980	1294	1250	1340	1839	1688	1535	647	647	4138
TE110A5	4320	4941	950	1294	1320	1420	2205	1786	1680	647	647	4846
TE170A5	4965	5676	1100	1574	1340	1455	2549	1913	1780	882	692	5687
TE220A5	5400	6017	1180	1644	1419	1534	2913	2038	1899	922	722	6157
TE280A5	5593	6267	1240	1713	1472	1602	3147	2038	1987	962	752	6827
TE280WA5	6398	7169	1240	1740	1497	1627	3290	2038	2042	963	777	7307
TE350A5	6735	7536	1410	1884	1565	1705	3595	2228	2165	1032	852	7977
TE400A5	7050	7741	1460	1949	1590	1730	3800	2217	2215	1072	877	8289
TE450A5	8226	8904	1410	2008	1505	1685	4061	2343	2145	1097	912	8727
TE550A5	8949	9747	1680	2469	1405	1595	4521	2173	2133	1235	1235	9818
TE650A5	9509	10357	1680	2495	1480	1715	4871	2320	2270	1248	1248	10498
TE850A5	10509	11397	1680	2765	1460	1695	5576	2450	2325	1383	1383	11503

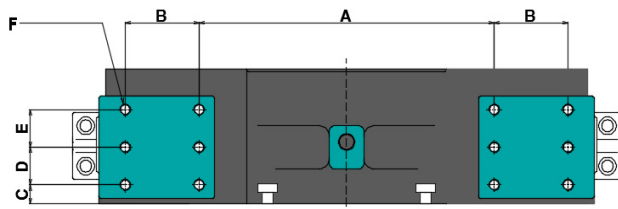

Robot installation position dimension

Hopper installation position dimension


Nozzle dimension

Unit: mm	A	B	C	D	E	F	G	H	ØI	J	K	ØL	M	ØN
TE50A5	340	85	30	75	-	8-M16 TAP DP32	80	80	70	4-M8 TAP	30	100	R9	2.5
TE110A5	455	85	35	70	-	8-M16 TAP DP32	100	100	80	4-M12 TAP	50	100	R9	2.5
TE170A5	420	140	35	70	70	12-M20 TAP DP40	100	100	80	4-M12 TAP	50	100	R9	3
TE220A5	560	140	35	70	70	12-M20 TAP DP40	100	100	80	4-M12 TAP	50	100	R9	3
TE280A5	560	140	35	140	-	8-M20 TAP DP40	120	120	100	4-M12 TAP	50	100	R14	3.5
TE280WA5	700	140	35	140	-	8-M20 TAP DP40	120	120	100	4-M12 TAP	50	100	R14	3.5
TE350A5	760	150	40	150	-	8-M20 TAP DP40	120	120	120	4-M12 TAP	50	100	R14	3.5
TE400A5	850	100	50	60	60	12-M24 TAP DP40	120	120	120	4-M12 TAP	50	100	R14	3.5
TE450A5	980	100	45	60	60	12-M24 TAP DP40	165	165	68	4-M12 TAP	130	100	R19	4
TE550A5	915	100	50	60	60	12-M24 TAP DP48	165	165	78	4-M12 TAP	130	100	R19	5
TE650A5	1000	240	70	105	105	12-M24 TAP DP48	165	165	88	4-M12 TAP	130	100	R19	5
TE850A5	1120	240	70	105	105	12-M24 TAP DP48	165	165	103	4-M12 TAP	130	100	R19	6

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

OPTION LIST

Injection Unit	Clamping Unit	General
Standard		
01. Single Flight Screw 02. Injection valve gate circuit (AC 1 + DC 1) 03. Back-Pressure Closed-loop system 04. PID Heating Control 05. Weekly Heating Timer 06. Cold screw protection mode 07. Temperature display & Alarm in abnormal Temp. 08. Auto Purging 09. Injection Speed & Pressure step (10 step) 10. Holding Speed & Pressure step (5 step) 11. Charging Speed & Pressure step (3 step) 12. Back Pressure control step (3 step) 13. Injection Pressure Graph Display 14. Injection Speed Graph Display 15. Screw RPM Display 16. Cushion Display & Alarm 17. Charging time count & alarm 18. Screw & Barrel (Anti Wear)	01. Ejecting on fly 02. Air blow-off unit (Fixed side 1 + Moving side 1) 03. Safety device(for electric & hydraulic) 04. Automatic clamp force measurement mode 05. Automatic Mold thickness adjust mode 06. Mold-Open Speed & Pressure step (5 step) 07. Mold-Close Speed & Pressure step (5 step) 08. Ejector Speed & Pressure step (3 step)	01. Standard Maintenance tools 02. Standard spare part 03. Leveling pad 04. Cooling water distribution 05. Automatic Ball-screw grease lubrication (All parts) 06. Automatic oil lubrication (Toggle) 07. Robot interface (Standard) 08. 3 Phase electric outlet (2 ea) 09. Single Phase electric outlet (1 ea) 10. Hopper throat temperature control device 11. 3 color alarm light 12. Shot data saving by external way 13. Production data statistics 14. Alarming & History save 15. Log history save 16. I/O circuit display 17. Shot data save (Internal 1,000 / External device)
Option		
01. Heater Disconnection check device 02. Hopper Slide (L/M) 03. Long-holding pressure type upgrade 04. Screw & Barrel (Nitrided barrel) 05. Screw & Barrel (Anti Wear & Corrosive) 06. Valve Gate Circuit & Connector (Interior type) 07. Pneumatic Valve Gate Block (Interior type) 08. Nozzle cylinders equipped with Potentiometers 09. Shut-off Nozzle (Pneumatic, Hydraulic, Spring) 10. Customized Design Screw (SB, Mixing, Coating)	01. Rotating Core Circuit 02. Safety Foot-board (Above 650ton) 03. Core on Fly 04. Daylight Extension 05. Automatic safety Door open/close 06. Product Chute 07. Hydraulic Core Interlock Connector (EM13, WJ Standard) 08. Hydraulic Core Device (Fixed : 170~400ton / Moving / 1or2 stage) 09. Mold ring on Moving-Platen 10. Ejector Interlock Connector (WJ Standard, EM13) 11. Ejector Forward/Backward External switch 12. Mold Insulation Platen 13. Pneumatic Core Puller (1-3 Stages)	01. Lubricating oil Recycling device 02. Product drop check device 03. Product quality sorting device (Below 280ton) 04. Hydraulic Auto-Clamp unit 05. Steel tray for resin leakage 06. Heater Insulation Band 07. Robot Interface (EM12, EM67, EM67.1, SPI) 08. CMS (Central Monitoring System) 09. AVR (Automatic Voltage Regulator) on Electric Panel 10. UPS (Uninterrentable Power Supply) on Electric Panel 11. Dosing unit Interface (for Masterbatch) 12. Gas Injection Interface 13. Steam Injection Interface 14. External Temperature Display (F/P) 15. Interior type Hot Runner Controller (EM13, WJ Standard)

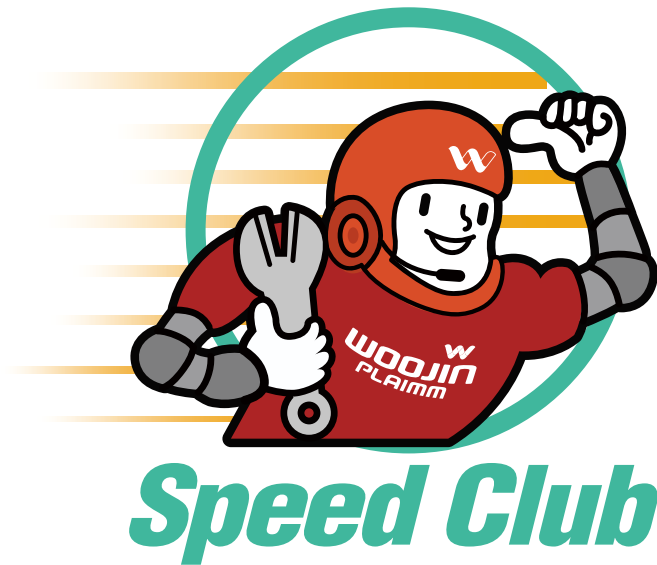

- 1 24-Hour On-Site Support
- 2 Dedicated B/S Team
- 3 Mobile App Support
- 4 Extended Parts Warranty

1 Expert Technical Staff


| Over 10 Years of Experience in Injection Molding
(Optimization / Foaming / Trial Injection)

2 Technical Research Team

| Control technology and mechanical design personnel
available for ongoing support

3 Auxiliary Facility Support

| Deployment of Skilled Technicians and Consulting Staff

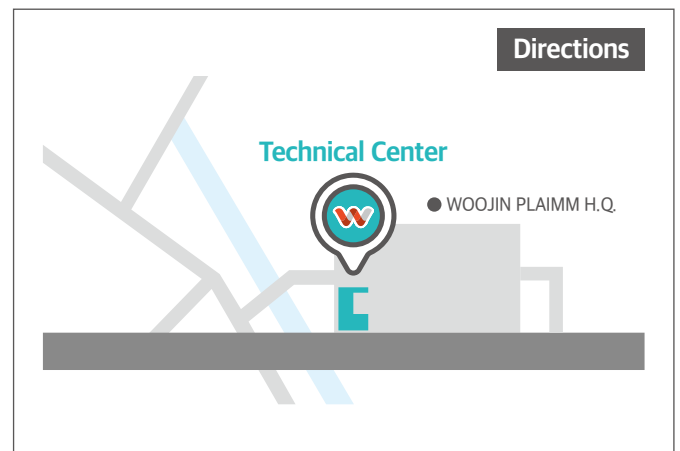

WOOJIN PLAIMM Technical Center **delivers the best results**
to our customers through **strategic consulting**
and **technical knowledge sharing**.



GLOBAL NETWORK



WOOJIN PLAIMM H.Q.

100, Woojinplaimm-ro, Jangan-myeon, Boeun-gun, Chungcheongbuk-do, Republic of Korea (28913)

Tel. +82 43-540-9000 Fax. +82 43-543-1420 E-mail. info@wjpim.com

SISTER COMPANIES

Austria Inc. office@woojin.at
Vienna T. +43-2256-20413

U.S.A Inc. us@wjpim.com
Chicago T. +1-847-457-1916
Atlanta T. +1-224-500-5085
Detroit T. +1-334-332-8597

Mexico Inc. mx@wjpim.com
Monterrey T. +52-81-4452-0851
Queretaro T. +52-81-1555-4286
Tijuana T. +52-81-1555-4224

China Inc. cn@wjpim.com
Ningbo T. +86-574-8680-6088
Guangdong T. +86-135-4938-2580
Suzhou T. +86-186-6787-5052

BRANCH OFFICE

Türkiye office@woojin.at
Istanbul T. +90-216-290-1483

Slovakia sk@wjpim.com
Zilina T. +421-903-207-420

Poland plooffice@wjpim.com
Katowice T. +48-513-211-177

Russia ru@wjpim.com
Moscow T. +7-495-245-0073

Thailand th@wjpim.com
Bangkok T. +66-2-745-4746
Chonburi T. +66-33-138-848

India india1@wjpim.com
Chennai T. +91-77081-80333
Anantapur T. +91-77081-54222

Malaysia my@wjpim.com
Kuala Lumpur T. +60-3-7887-0590
Johor Bahru T. +60-7-2121-322

Indonesia id@wjpim.com
Jakarta T. +62-21-8370-1281
Cikarang T. +62-21-8977-4613

Vietnam vn@wjpim.com
Bacninh T. +84-22-2390-6797
Hochiminh T. +84-28-3772-0028

Japan jp@wjpim.com
Nagoya T. +81-80-1249-1753

Bangladesh bd.arif@wjpim.com
Dhaka T. +880-19-2563-7935

Philippines philippines2@wjpim.com
Philippines T. +63-49-542-5722



HOME PAGE



YOUTUBE



CopyRight©2026, WOOJIN PLAIMM Co.,Ltd.

- ※ The copyright of this catalog belongs to WOOJIN PLAIMM Co., Ltd. Unauthorized use may result in legal liability under copyright law.
- ※ Product images and specifications are subject to change without prior notice for quality improvement.
- ※ Content updated as of January 2, 2026.

Korea No.1 IMM Manufacturer

WOOJIN PLAIMM Co., Ltd. | 100, Woojinplaimm-ro, Jangan-myeon, Boeun-gun, Chungcheongbuk-do, Republic of Korea
T. +82 43-540-9000 F. +82 43-543-1420 E. info@wjpim.com

