


ENGLISH

TH-AS

Energy-Saving Toggle Hybrid Series

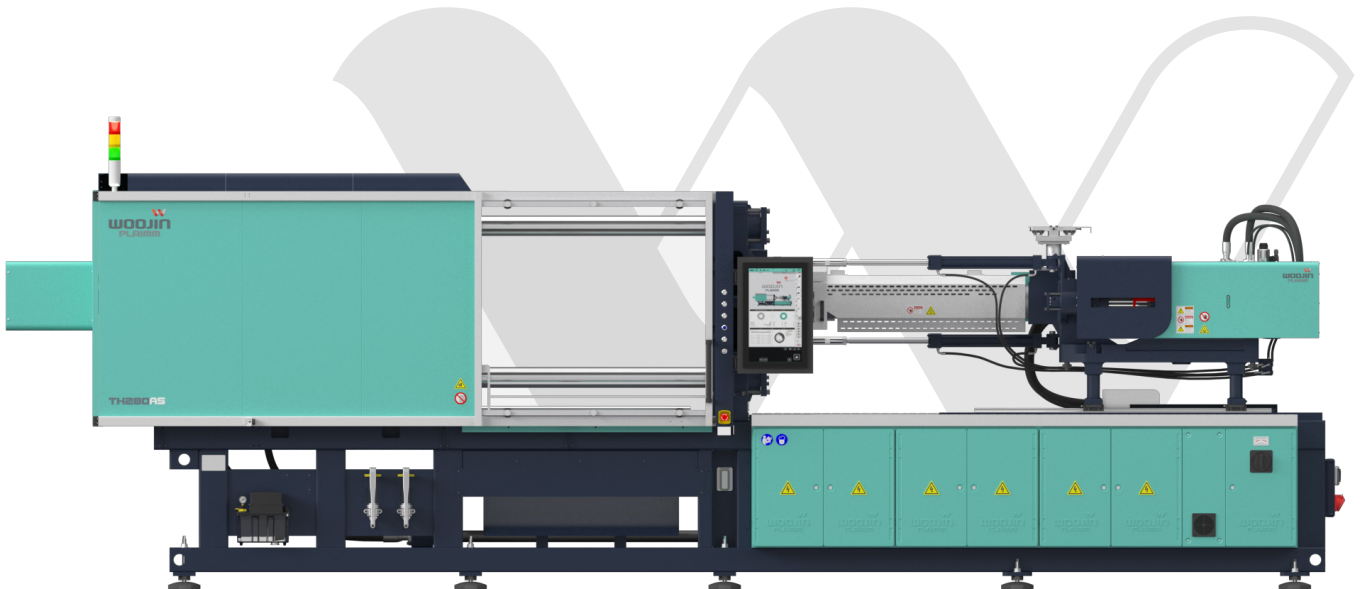

OVERVIEW

ITH-A5


Energy-Saving Toggle Hybrid Series

An injection molding machine designed for maximum efficiency with a new toggle mechanism

(130~480Ton)



IMM Promotion

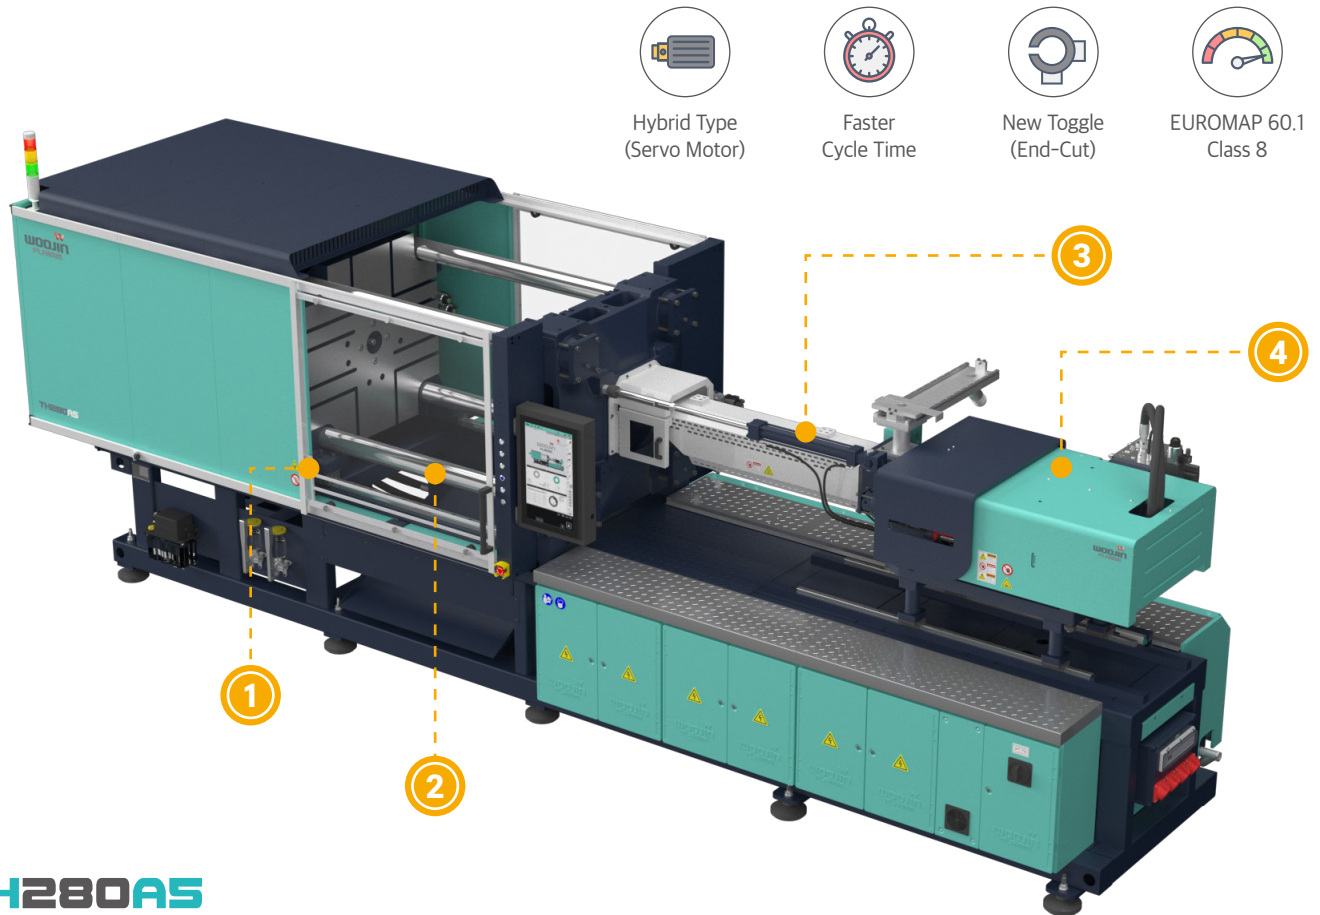

TH280A5

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

1 Moving Platen with L/M Guide

- | Reduced force required for platen movement contributes to energy savings
- | Reference surface machining of the L/M guide improves platen parallelism

2 Clean Tie bar

- | Tie-bar bush eliminated (no grease injection required)
- | Improves tie-bar cleanliness and reduces grease consumption

3 Dual pull nozzle touch cylinder

- | Nozzle touch cylinder with vertically and horizontally symmetrical design
- | Ensures stable touch pressure
- | Prevents platen parallelism issues and improves molding precision

4 Closed-Loop Back-Pressure Control



- | The system precisely senses and compares the set back-pressure in real time, improving injection reproducibility and responsiveness
- | Enables precise injection with accurate resin volume

FEATURES


ROBUST PLATEN STRUCTURE

1 Platen FEA Structural Analysis

- | Improves molding precision by ensuring uniform mold clamping surface pressure (EUROMAP 9 applied)
- | Extends mold life through mold deflection analysis and enhances durability by distributing platen stress

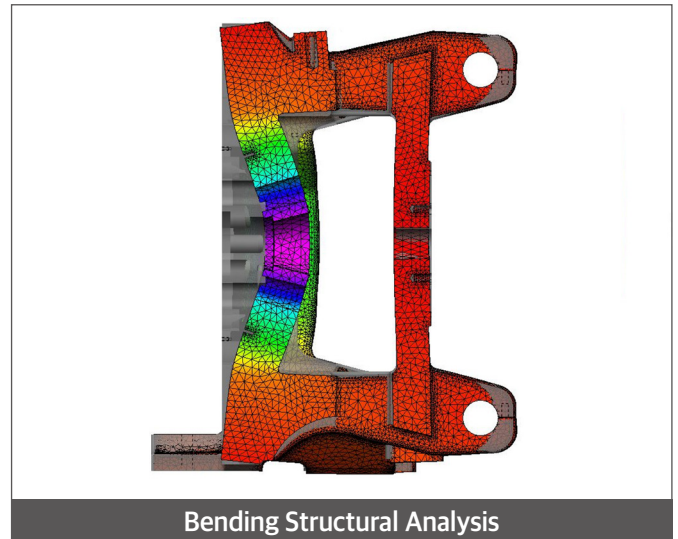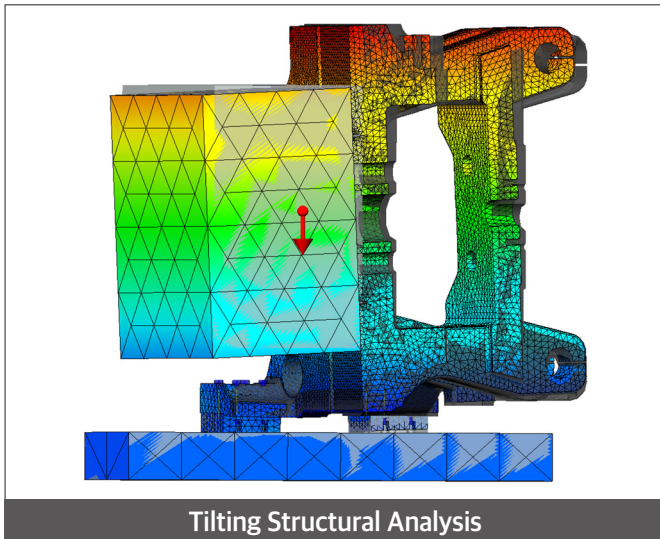


NEW TOGGLE MECHANISM

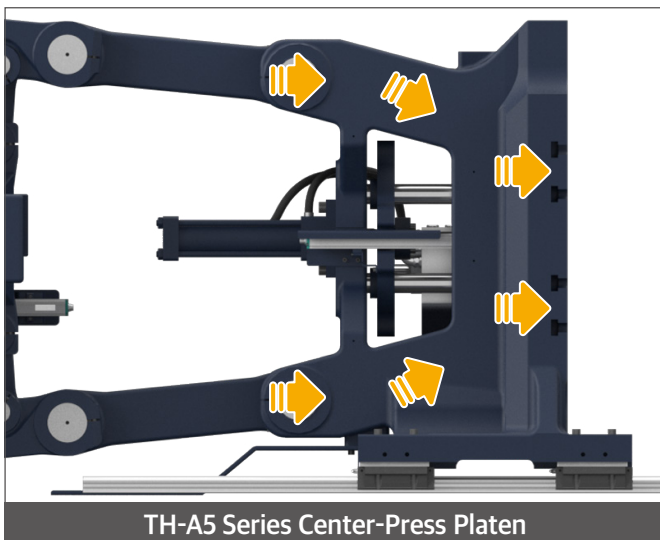

1 Center-Press Platen Design

- | Minimizes mold deformation during mold closing to improve molding precision and extend mold life
- | Maintains uniform surface pressure inside the mold to prevent flash
- | Uniform clamping force distribution enables operation with lower clamping force

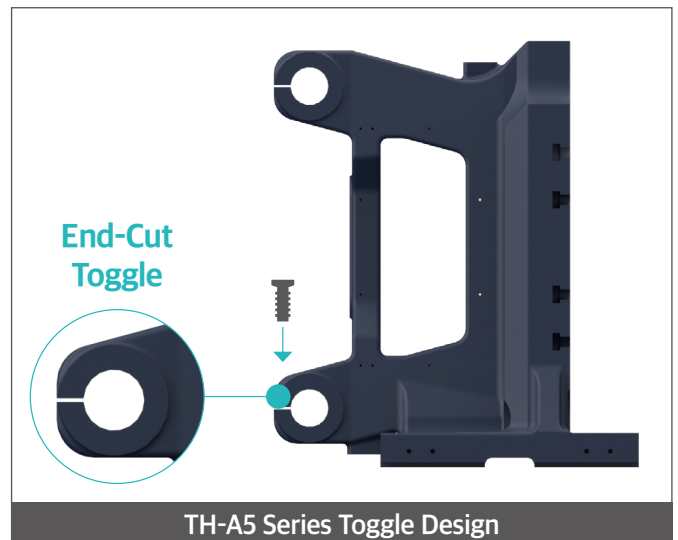

2 End-Cut NEW Toggle Mechanism

- | Approximately 30% improvement in clamping force amplification, increasing servo motor efficiency
- | Optimized design suppresses platen torsional stress during high-speed mold opening and closing for stable operation
- | Clamp-type toggle pin fixing structure enhances durability

FEATURES


PRECISE POSITION CONTROL

1 Clamping Adjustment System

- | Applies an encoder control system to the clamping adjustment hydraulic motor, enabling precise mold thickness adjustment
- | Fine clamping adjustment allows the use of accurate clamping force

2 Clamping Adjustment Brake Motor

- | Maintains set clamping force and position even during repetitive clamping operations
- | Prevents platen position shift caused by mold opening and closing movements


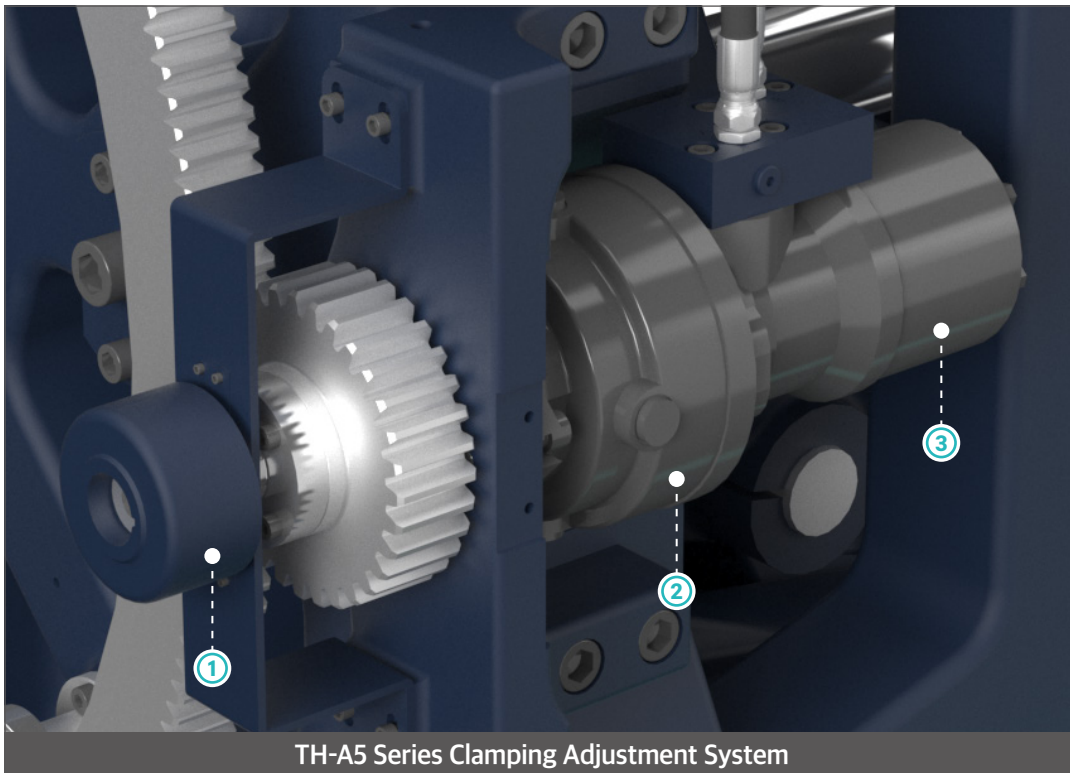


TH-A5 Series Clamping Adjustment System


- ① Encoder Control System
- ② Clamping Adjustment Brake Motor
- ③ Clamping Adjustment Motor

ENERGY CONSUMPTION CLASS

- | Achieves “Class 8” energy consumption of 0.38 kWh/kg or less based on EUROMAP 60.1
- | Reduces electricity costs by more than 50% compared to conventional hydraulic systems using three-phase induction motors

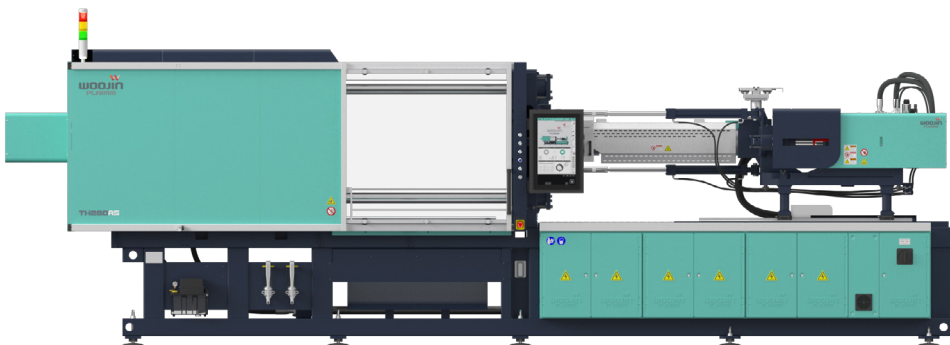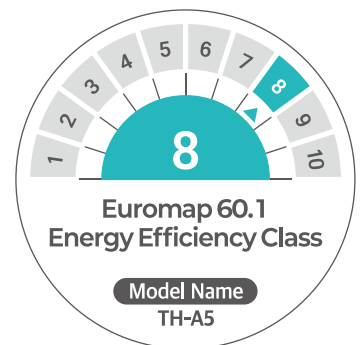

ENHANCED INJECTION CONTROL

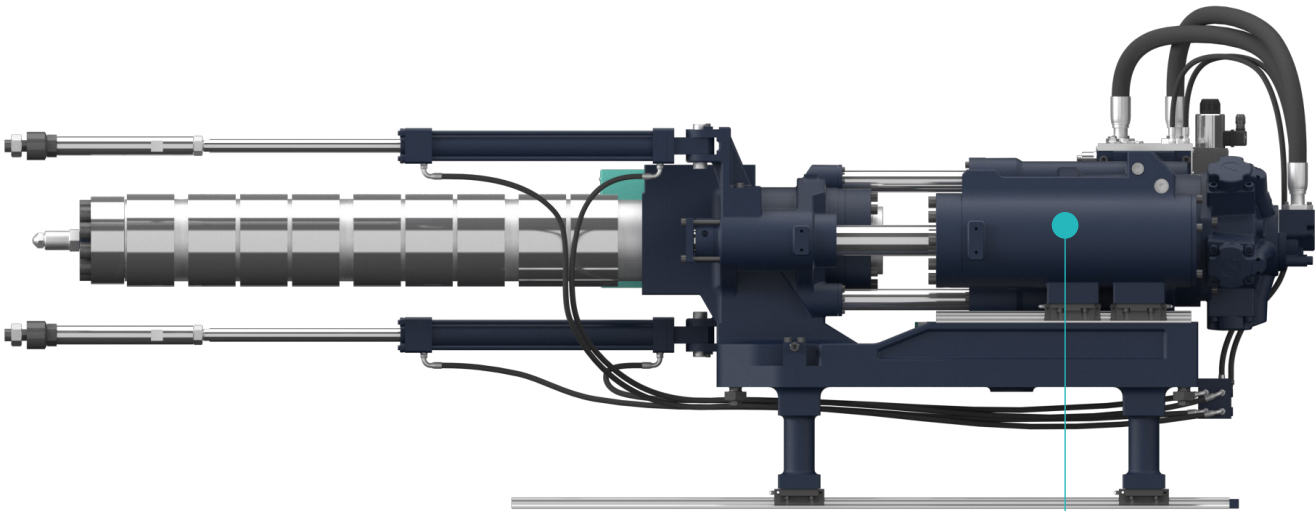

1 High-Rigidity 2-Axis Injection Unit


- | Independent structure for injection and forced retraction increases injection force and improves control capability
- | During forced retraction, reducing fluid supply lowers pump speed, enhancing energy efficiency

2 Pipe-Less Injection Cylinder


- | Hydraulic lines are integrated into the cylinder to enhance injection responsiveness

3 Injection Unit Swivel Mechanism

- | Manual swivel design allows easy screw and barrel replacement and simplifies post-maintenance

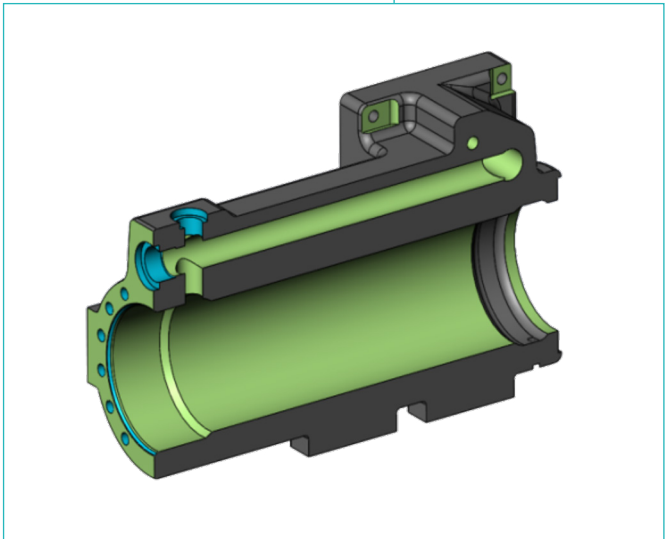

TH-A5 Cross-Section of Pipe-Less Injection Cylinder

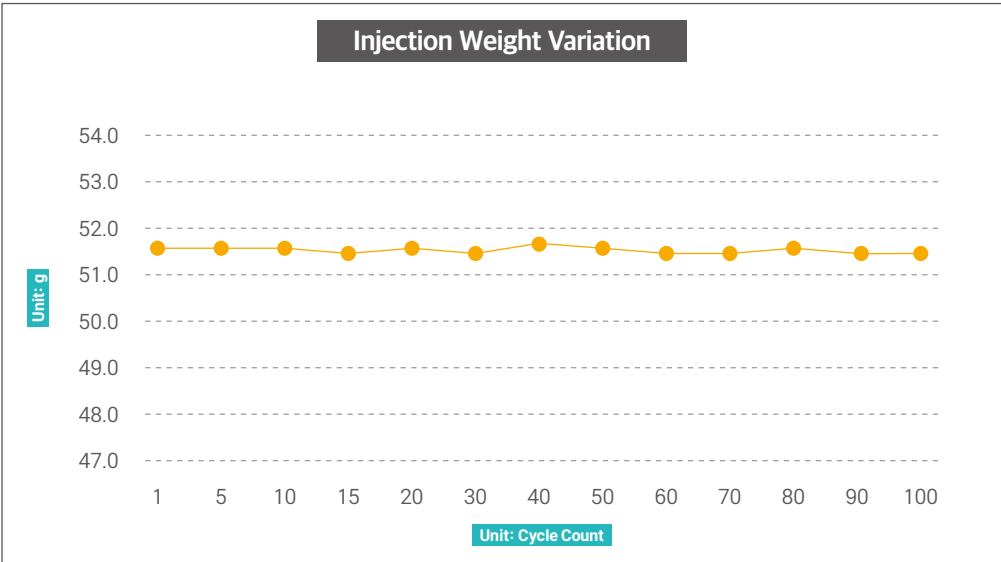

TH380A5

Product	Battery Components
Cavity	4 Cavity

※ Specifications may vary depending on the mold, raw material, and product specifications

FEATURES

(In collaboration with Austrian hydraulic specialist Dorninger)

EUROPEAN-STYLE HYDRAULIC SYSTEM

1 High-Response Clamping Proportional Valve

- | Uses PARKER proportional valves (Made in Germany)
- | Faster mold opening & closing reduces dry cycle time
- | Achieves stable automated production through precise control of the mold opening completion position
- | Optimized mold protection enhances mold durability



PARKER Proportional Valve




B&R Servo Motor

2 Servo Motor, Drive & Pump

- | Speed control system stops power transmission during cooling and idle periods (reduces energy consumption, enables compact cooling system, and lowers operating costs)
- | Servo system delivers accurate pressure and speed, providing excellent position and pressure control during holding pressure transition

3 Oil Tank Circulation System


- | Cooling unit and filtration system are independently configured to maintain consistent temperature and cleanliness
- | Structure avoids resistance to the filter and cooler during machine operation
- | Prevents hydraulic component damage and oil leakage caused by oil temperature rise

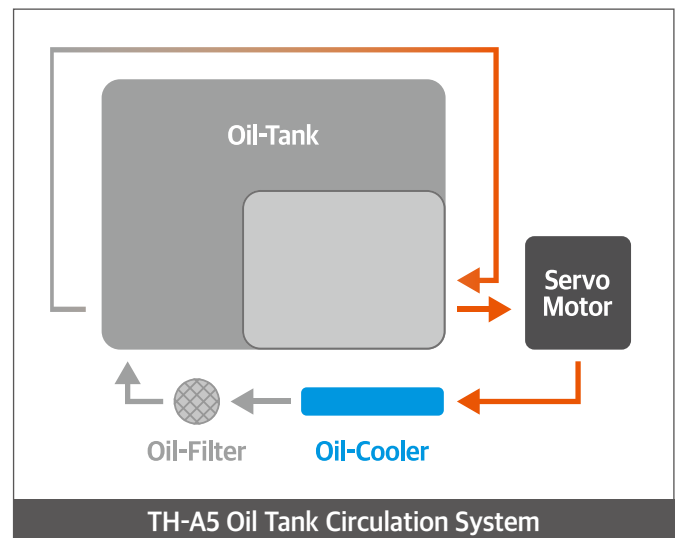

TH-A5 Oil Tank Circulation System

4 Seamless Pipe Structure

- | Prevents internal pipe contamination caused by welding
- | High durability ensures easy maintenance

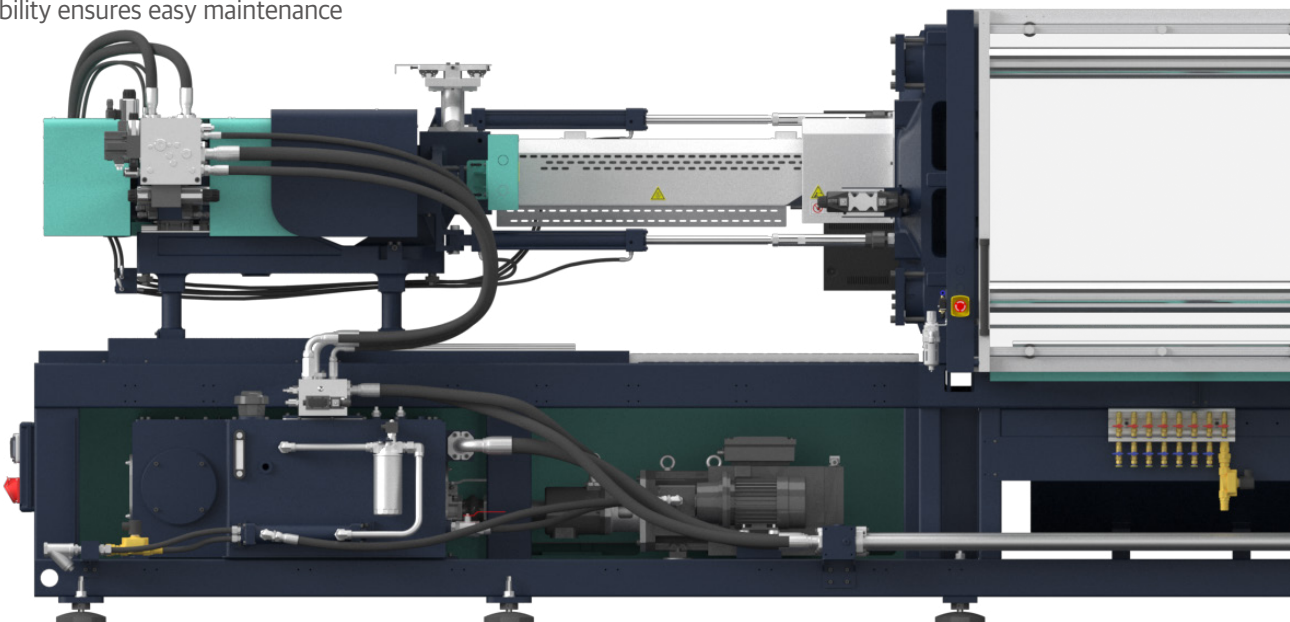


CONTROLLER

IMC 510



* The Red Dot Award is a globally prestigious design award, and together with Germany's iF Design Award and the USA's IDEA, it is recognized as one of the world's top three design awards

FEATURES



- Equipped with B&R Controller
- 21-inch Full HD Touch Screen
- User Interface (UI/UX) Optimized for IMM



- Injection process design using Smart Sequence
- Review processes and receive feedback through PLAIMM-X




- Process management analysis and energy monitoring




- Supports OPC-UA (EUROMAP 77)
- Data provided via SQL and CSV
- Peripheral device monitoring and remote support services available
- Check operation sequence with Overview Chain
- View clamping and injection graphs on a single page
- Frequently used functions managed through custom tabs

MAIN PAGE SCREEN CONFIGURATION

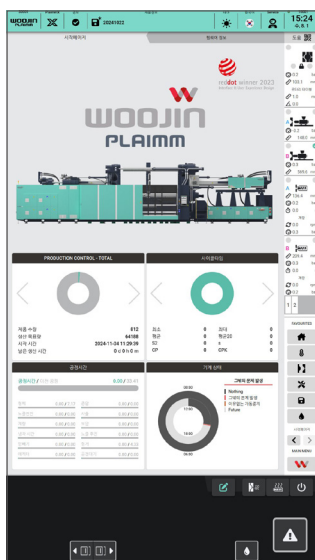


Home

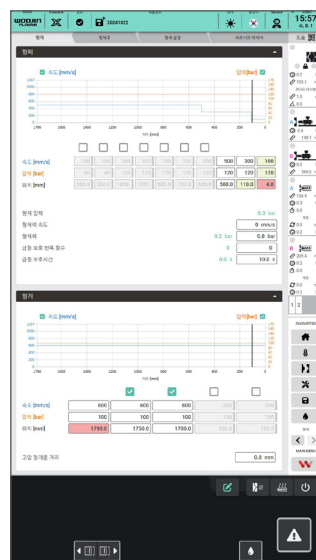

Mold




Injection/Pressure Hold

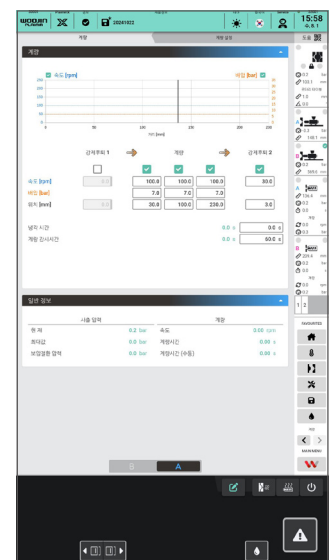


Metering

※ This controller may be changed without prior notice due to optional specifications or software updates.

SMART INJECTION TECHNOLOGY

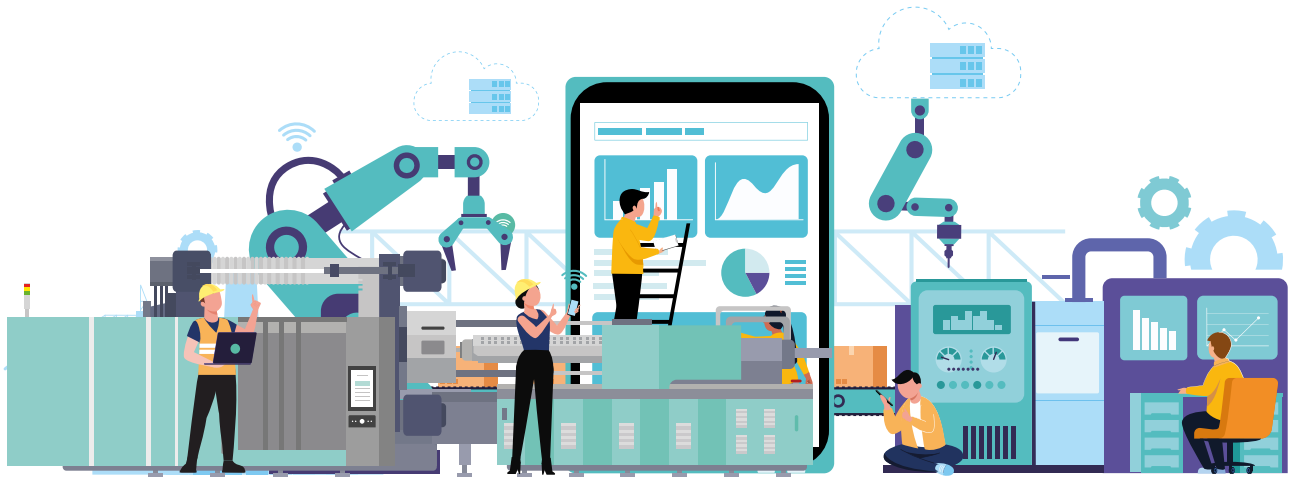

※ Smart injection molding functions may be changed without prior notice due to software updates or product improvements.



1 Flash Monitoring

| A function that detects mold flash occurring during the injection molding process to improve and stabilize product quality

- Direct clamping type: Flash measured by tie-bar position sensor
- Toggle type: Flash measured by clamping force sensor



2 Weight Control

| A function that automatically adjusts holding pressure and metering process settings based on Viscosity Monitoring to minimize injection weight variations caused by changes in molten resin viscosity

| Benefits

- ① Improved quality stability when molding recycled resins or eco-friendly specialty materials
- ② Reduced scrap and improved productivity through defect reduction
- ③ Supports environmental initiatives such as carbon neutrality and SDGs



3 Smart Sequencer

| A function that enables flexible operation configuration in the automatic mode of the injection molding machine

| Allows easy setup of special operation sequences and automatically calculates axis interlocks to ensure equipment safety




4 Edge Controller

- | Data integration converter function for peripheral devices via 4-channel RS485 communication
- | Connectable with various peripheral equipment such as mold temperature controllers, dryers, chillers, and hot runner controllers
- | Capable of collecting peripheral device data and transmitting it to a cloud server




5 Energy Monitoring

- | Displays energy consumption separately for hydraulic or electric systems and cylinder heating
- | Measures and displays energy consumption by each stage of the injection molding process (Mold Closing / Injection / Holding / Metering / Cooling / Mold Opening / Ejector)
- | Helps reduce power consumption by comparing energy usage during production and downtime



6 Machine Test

- | A function that allows easy inspection and testing of the injection molding machine status
- | Enables periodic machine maintenance even for first-time users
- | Provides test functions for clamping force, injection pressure, and injection speed (additional Machine Test items planned)



7 Mold Recognition

(Coming Soon)

- | A function that enables one-touch setup of recipes for the injection molding machine, take-out robot, and peripheral equipment using mold ID information
- | Mold ID can be selected from RF-ID, QR code, or barcode



8 Data Collection Function

(Coming Soon)

- | A function that provides detailed time-series data from the injection molding machine
 - Data requiring detailed analysis
 - ① Actual and set values of injection pressure, speed, and position
 - ② clamping pressure, speed, position, and four tie-bar data
 - ③ Includes 2K (Injection A / B) data
 - Data with minimal variation
 - ① Temperature data (nozzle, barrel, hopper, hydraulic oil, etc.)
 - ② includes shot-based data for quality analysis

SPECIFICATIONS

MODEL		TH130A5									TH190A5								
Injection Unit		IH190			IH300			IH600			IH300			IH600			IH1000		
Screw & Barrel type		O	A	B	O	A	B	O	A	B	O	A	B	O	A	B	O	A	B
Screw diameter	mm	25	28	32	28	32	36	36	40	45	28	32	36	36	40	45	45	50	55
Injection pressure	kg/cm²	2688	2363	1809	2686	2450	1936	2690	2431	1920	2686	2450	1936	2690	2431	1920	2600	2258	1866
	Mpa	264	232	177	263	240	190	264	238	188	263	240	190	264	238	188	255	221	183
Theoretical injection volume	cm³	64	80	105	92	121	153	204	251	318	92	121	153	204	251	318	366	452	546
Shot weight (PS)	g	59	74	96	85	111	141	188	232	293	85	111	141	188	232	293	337	416	504
Injection rate	cm³/s	62	77	101	74	97	122	122	151	191	74	97	122	122	151	191	175	217	262
Screw stroke	mm	130			150			200			150			200			230		
Injection speed	mm/s	125			120			120			120			120			110		
Plasticizing capacity (PS)	kg/h	31	41	58	41	58	82	69	94	127	41	58	82	69	94	127	110	148	189
Screw rotation speed	rpm	360			360			300			360			300			260		
Clamping Unit																			
Clamping force	ton(kN)	130(1275)									190(1863)								
Distance between tie-bar (H×V)	mm	470 x 470									570 x 570								
Platen dimension (H×V)	mm	680 x 680									840 x 790								
Daylight	mm	400									500								
Max. Daylight	mm	850									1000								
Min. mold height	mm	150									180								
Max. mold height	mm	450									500								
Ejector force	ton(kN)	3.7(36.3)									4.5(44.1)								
Ejector stroke	mm	130									160								
General																			
Heater capacity	kW	6.1	7.0	7.8	7.0	7.8	9.1	9.9	11.2	12.6	7.0	7.8	9.1	9.9	11.2	12.6	14.6	17.1	18.7
Motor capacity	kW	9.1			9.1			15.7			15.7			15.7			19.8		
Total electric power capacity	kW	15.2	16.1	16.9	16.1	16.9	18.2	25.6	26.9	28.3	22.7	23.5	24.8	25.6	26.9	28.3	34.4	36.9	38.5
Hydraulic oil tank capacity	L	190			190			190			300			300			300		
Machine weight	ton	4.5			5.0			5.5			6.5			7.0			7.5		
Machine dimension (L×W×H)	m	-			4.9 x 1.5 x 1.7			-			-			5.8 x 1.6 x 1.9			-		
Cooling water consumption	L/min	40									40								

01. The oretical injection volume: cross section of screw*screw stroke.
 02. The minimum mold size must be at least 70% of the tie bar distance.
 03. The specifications might be changed without any prior notice.

04. The metering distance is recommended in the arnge of 1 to 3 times of screw diamteer.
 05. Machine dimensions may vary when the injection unit moves UP or DOWN.

TH240A5									TH280A5								
IH600			IH1000			IH1250			IH1000			IH1250			IH1800		
O	A	B	O	A	B	O	A	B	O	A	B	O	A	B	O	A	B
36	40	45	45	50	55	50	55	60	45	50	55	50	55	60	55	60	65
2690	2431	1920	2600	2258	1866	2594	2144	1801	2600	2258	1866	2594	2144	1801	2494	2257	2008
264	238	188	255	221	183	254	210	177	255	221	183	254	210	177	245	221	197
204	251	318	366	452	546	481	582	693	366	452	546	481	582	693	677	806	946
188	232	293	337	416	504	443	536	638	337	416	504	443	536	638	624	743	871
122	151	191	175	217	262	217	262	312	175	217	262	217	262	312	249	296	347
200			230			245			230			245			285		
120			110			110			110			110			105		
69	94	127	110	148	189	142	182	233	110	148	189	142	182	233	160	205	253
300			260			250			260			250			220		
240(2354)									280(2746)								
625 x 625									670 x 670								
900 x 870									970 x 980								
550									600								
1150									1250								
200									250								
600									650								
6.3(61.8)									6.3(61.8)								
180									200								
9.9	11.2	12.6	14.6	17.1	18.7	19.1	21.0	23.8	14.6	17.1	18.7	19.1	21.0	23.8	21.0	23.8	25.7
19.8			19.8			25.1			25.1			25.1			32.7		
29.7	31.0	32.4	34.4	36.9	38.5	44.2	46.1	48.9	39.7	42.2	43.8	44.2	46.1	48.9	53.7	56.5	58.4
340			340			340			340			340			340		
9.3			9.8			10.3			11.8			12.3			12.8		
-			6.5 x 1.7 x 2.1			-			-			6.8 x 1.8 x 2.1			-		
40									40								

SPECIFICATIONS

MODEL		TH380A5									TH420A5								
Injection Unit		IH1250			IH1800			IH2800			IH1250			IH1800			IH2800		
Screw & Barrel type		O	A	B	O	A	B	O	A	B	O	A	B	O	A	B	O	A	B
Screw diameter	mm	50	55	60	55	60	65	65	70	80	50	55	60	55	60	65	65	70	80
Injection pressure	kg/cm²	2594	2144	1801	2494	2257	2008	2375	2048	1568	2594	2144	1801	2494	2257	2008	2375	2048	1568
	Mpa	254	210	177	245	221	197	233	201	154	254	210	177	245	221	197	233	201	154
Theoretical injection volume	cm³	481	582	693	677	806	946	1161	1347	1759	481	582	693	677	806	946	1161	1347	1759
Shot weight (PS)	g	443	536	638	624	743	871	1070	1241	1621	443	536	638	624	743	871	1070	1241	1621
Injection rate	cm³/s	217	262	312	249	296	347	313	363	474	217	262	312	249	296	347	313	363	474
Screw stroke	mm	245			285			350			245			285			350		
Injection speed	mm/s	110			105			94			110			105			94		
Plasticizing capacity (PS)	kg/h	142	182	233	160	205	253	201	244	347	142	182	233	160	205	253	201	244	347
Screw rotation speed	rpm	250			220			175			250			220			175		
Clamping Unit																			
Clamping force	ton(kN)	380(3727)									420(4119)								
Distance between tie-bar (H×V)	mm	770 x 770									820 x 820								
Platen dimension (H×V)	mm	1160 x 1090									1210 x 1140								
Daylight	mm	700									750								
Max. Daylight	mm	1450									1550								
Min. mold height	mm	300									350								
Max. mold height	mm	750									800								
Ejector force	ton(kN)	9.6(94.2)									9.6(94.2)								
Ejector stroke	mm	210									210								
General																			
Heater capacity	kW	19.1	21.0	23.8	21.0	23.8	25.7	18.4	20.6	24.1	19.1	21.0	23.8	21.0	23.8	25.7	18.4	20.6	24.1
Motor capacity	kW	32.7			32.7			32.7			32.7			32.7			32.7		
Total electric power capacity	kW	51.8	53.7	56.5	53.7	56.5	58.4	51.1	53.3	56.8	51.8	53.7	56.5	53.7	56.5	58.4	51.1	53.3	56.8
Hydraulic oil tank capacity	L	450			450			450			450			450			450		
Machine weight	ton	15.5			16.0			17.0			16.5			17.0			18.0		
Machine dimension (L×W×H)	m	-			7.6 x 1.9 x 2.1			-			-			7.8 x 2.0 x 2.1			-		
Cooling water consumption	L/min	65									65								

01. Theoretical injection volume: cross section of screw*screw stroke.
02. The minimum mold size must be at least 70% of the tie bar distance.
03. The specifications might be changed without any prior notice.






04. The metering distance is recommended in the range of 1 to 3 times of screw diameter.
05. Machine dimensions may vary when the injection unit moves UP or DOWN.

TH480A5

IH1800			IH2800		
O	A	B	O	A	B
55	60	65	65	70	80
2494	2257	2008	2375	2048	1568
245	221	197	233	201	154
677	806	946	1161	1347	1759
624	743	871	1070	1241	1621
249	296	347	313	363	474
	285			350	
	105			94	
160	205	253	201	244	347
	220			175	
480(4707)					
870 x 870					
1270 x 1190					
800					
1600					
350					
800					
14.9(146.2)					
230					
21.0	23.8	25.7	18.4	20.6	24.1
	32.7			32.7	
53.7	56.5	58.4	51.1	53.3	56.8
	500			500	
	24.0			25.0	
	-			8.7 x 2.1 x 2.2	
65					



PLATEN DIMENSION

Unit: mm

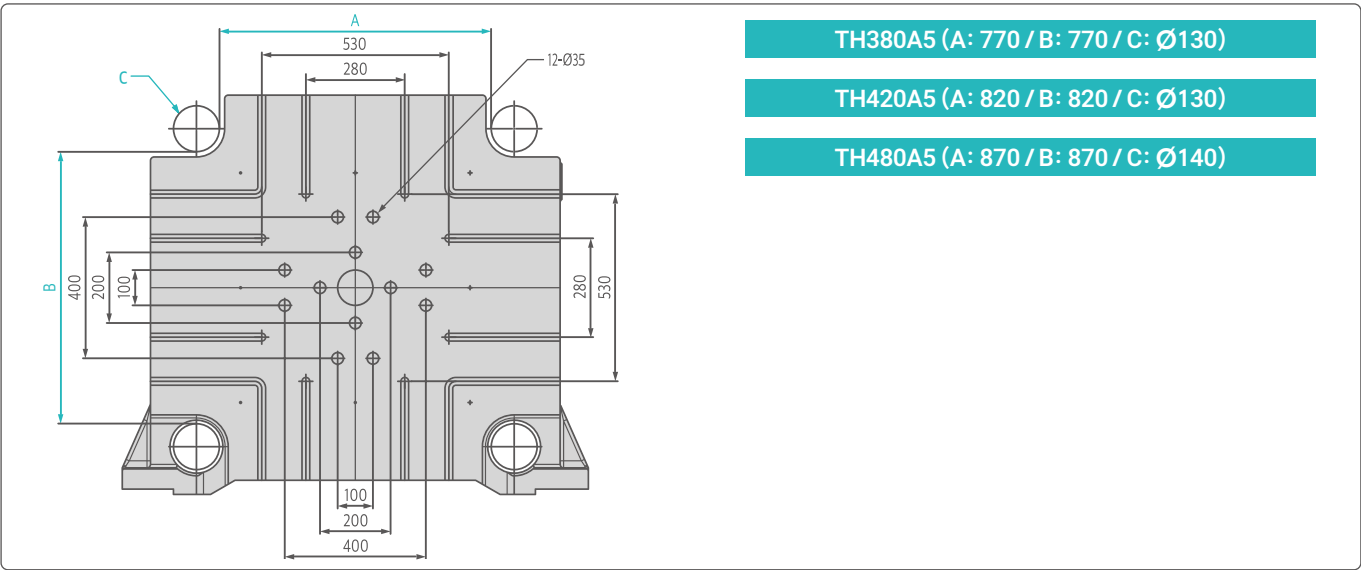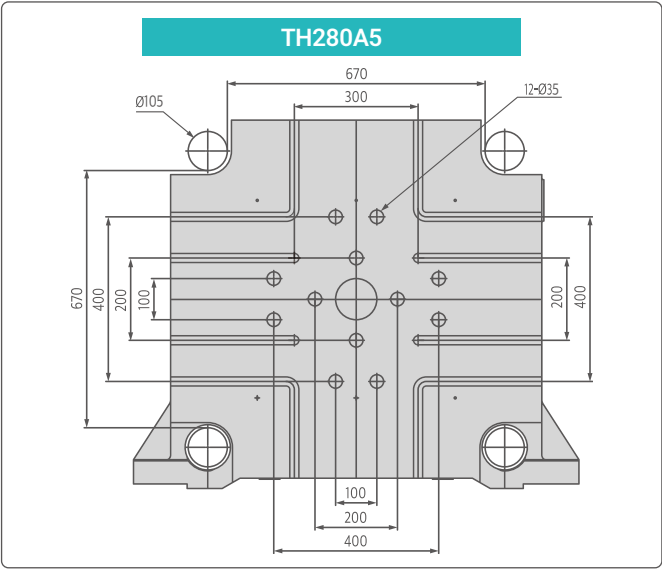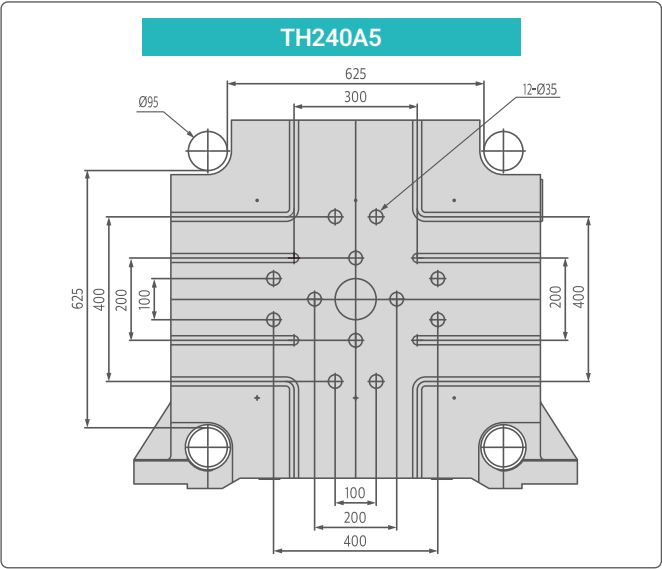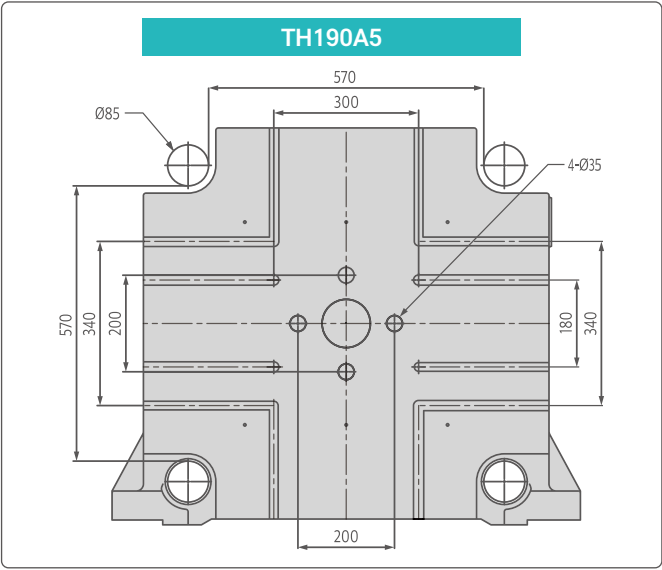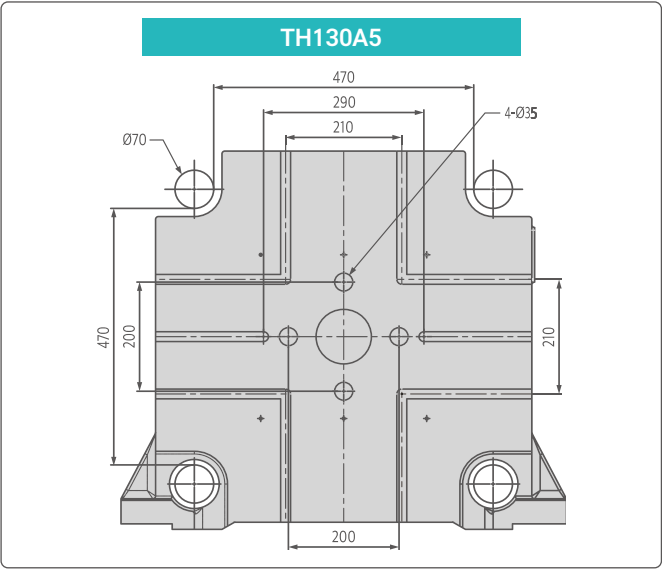




※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

MACHINE DIMENSION

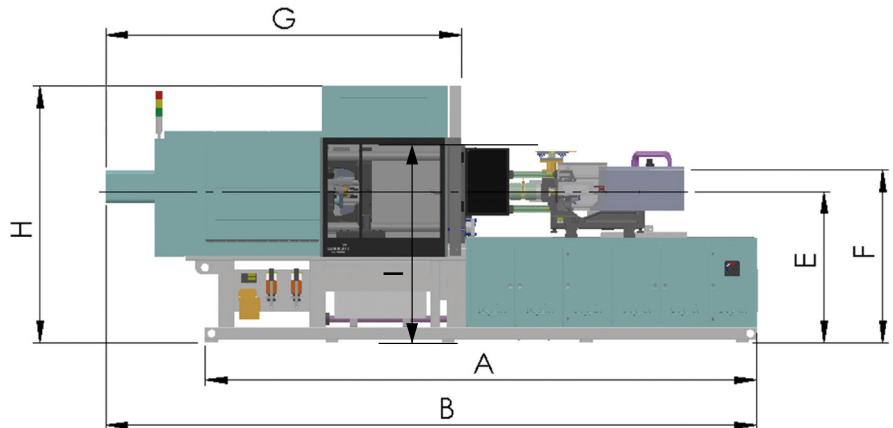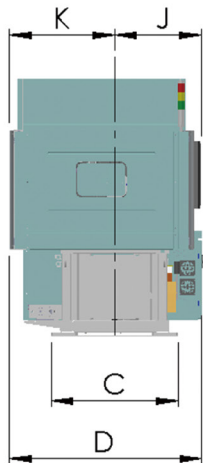

Machine Dimension

Unit: mm	A	B	C	D	E	F	G	H	I	J	K
TH130A5	4190	4884	965	1477	1145	1300	2646	1613	1505	663	814
TH190A5	4750	5775	1100	1574	1245	1405	3117	1818	1685	692	882
TH240A5	5595	6405	1180	1649	1349	1529	3511	2057	1829	727	922
TH280A5	5877	6749	1240	1734	1402	1562	3721	1966	1917	772	962
TH380A5	6560	7514	1450	1884	1425	1600	4258	2086	2025	852	1032
TH420A5	6790	7739	1500	1949	1450	1625	4466	2077	2075	877	1072
TH480A5	7537	8693	1390	2009	1500	1690	4760	2142	2140	912	1097

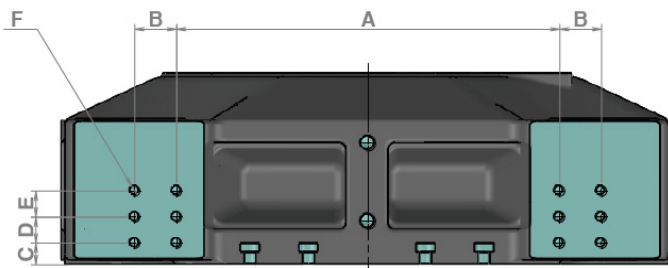

Robot installation position dimension

Hopper installation position dimension


Nozzle dimension

Unit: mm	A	B	C	D	E	F	G	H	ØI	J	K	ØL	M	ØN
TH130A5	455	85	35	70	-	8-M16 TAP DP32	100	100	85	4-M12 TAP	50	100	R9	2.5
TH190A5	420	140	35	70	70	12-M20 TAP DP40	120	120	90	4-M12 TAP	50	100	R9	3
TH240A5	560	140	35	70	70	12-M20 TAP DP40	120	120	100	4-M12 TAP	50	100	R14	3.5
TH280A5	560	140	35	140	-	8-M20 TAP DP40	120	120	100	4-M12 TAP	50	100	R14	3.5
TH380A5	760	150	40	150	-	8-M20 TAP DP40	127	127	115	4-M12 TAP	50	100	R14	3.5
TH420A5	850	100	50	60	60	12-M24 TAP DP40	127	127	115	4-M12 TAP	50	100	R14	3.5
TH480A5	980	100	45	60	60	12-M24 TAP DP40	127	127	115	4-M12 TAP	120	100	R19	4

※ Product images may be subject to change without prior notice due to optional specifications or product improvements.

OPTION LIST

Injection Unit	Clamping Unit	General
Standard		
01. Single Flight Screw 02. Injection valve gate circuit (AC 1 + DC 1) 03. Back-Pressure Closed-loop system 04. PID Heating Control 05. Weekly Heating Timer 06. Cold screw start protection mode 07. Temperature display & Alarm in abnormal Temp. 08. Auto Purging 09. Injection Speed & Pressure step (10 step) 10. Holding Speed & Pressure step (5 step) 11. Charging Speed & Pressure step (3 step) 12. Back Pressure control step (3 step) 13. Injection Pressure Graph Display 14. Injection Speed Graph Display 15. Screw RPM Display 16. Cushion Display & Alarm 17. Charging time count & alarm 18. Screw & Barrel (Anti Wear)	01. Mold thickness adjusting break unit 02. Hydraulic Core puller (Moving platen side, 1 stage) 03. Air blow-off unit (Fixed side 1 + Moving side 1) 04. Safety device(for electric & hydraulic) 05. Automatic Mold thickness adjust mode 06. Mold-Open Speed & Pressure step (4 step) 07. Mold-Close Speed & Pressure step (5 step) 08. Ejector Speed & Pressure step (2 step)	01. Standard Maintenance tools 02. Standard spare part 03. Leveling pad 04. Cooling water distributor 05. Automatic oil lubrication (Toggle) 06. Robot interface (Standard) 07. 3 Phase electric outlet (2 ea) 08. Single Phase electric outlet (1 ea) 09. Hopper throat temperature control device 10. Hydraulic oil purification device 11. Hydraulic oil temperature control device 12. Hydraulic oil level alarm 13. Hydraulic oil temperature check & alarm 14. Hydraulic oil heating mode 15. 3 color alarm light 16. Shot data saving by external way 17. Production data statistics 18. Alarming & History save 19. Log history save 20. I/O circuit display 21. Shot data save (Internal 1,000 / External device)
Option		
01. Heater Disconnection check device 02. Hopper Slide (L/M) 03. Screw & Barrel (Nitrided barrel) 04. Screw & Barrel (Anti Wear & Corrosive) 05. Fast Injection Circuit (ACC) 06. Valve Gate Circuit & Connector (Interior type) 07. Hydraulic Valve Gate Block (Interior type) 08. Pneumatic Valve Gate Block (Interior type) 09. Hydraulic Valve Gate Device (External device) 10. Charging on Fly (AC Motor) 11. Shut-off Nozzle (Hydraulic) 12. Customized Design Screw (SB, Mixing, Coating)	01. Rotating Core Circuit 02. Core & Ejector on Fly 03. Daylight Extension 04. Automatic safety Door open/close 05. Core Pressure release Circuit (Automatic) 06. Product Chute 07. Hydraulic Core Check Valve 08. Hydraulic Core Interlock Connector (EM13, WJ Standard) 09. Hydraulic Core Puller (Fixed, 1~4 Stages) 10. Hydraulic Core Puller (Moving 2~4 Stages) 11. Mold ring on Moving-Platen 12. Ejector Check Valve 13. Ejector Interlock Connector (WJ Standard, EM13) 14. Ejector Forward/Backward External switch 15. Mold Insulation Platen 16. Pneumatic Core Puller (1-3 Stages)	01. Lubricating oil Recycling device 02. Product drop check device 03. Product quality sorting device (Below 280ton) 04. Hydraulic Auto-Clamp unit 05. Steel tray for resin leakage 06. Heater Insulation Band 07. Automatic Grease Lubrication (Clamping unit) 08. Robot Interface (EM12, EM67, EM67.1, SPI) 09. CMS (Central Monitoring System) 10. AVR (Automatic Voltage Regulator) on Electric Panel 11. UPS (Uninterruptible Power Supply) on Electric Panel 12. Dosing unit Interface (for Masterbatch) 13. Gas Injection Interface 14. Steam Injection Interface 15. External Temperature Display (F/P) 16. Interior type Hot Runner Controller (EM13, WJ Standard)

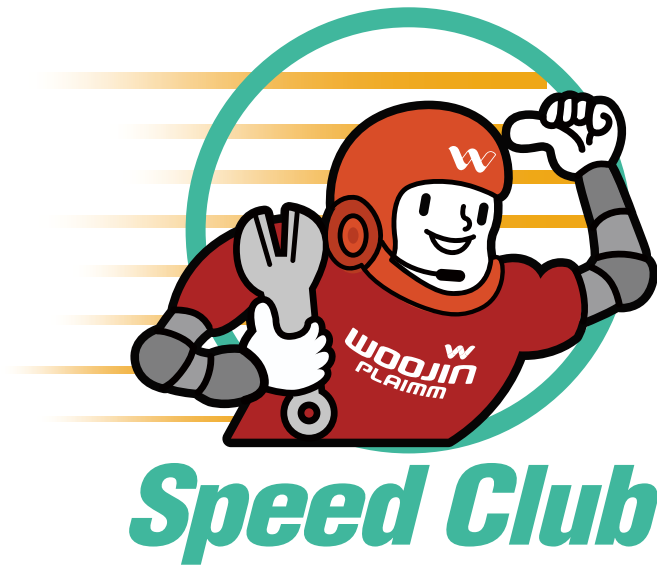

1 24-Hour On-Site Support

2 Dedicated B/S Team

3 Mobile App Support

4 Extended Parts Warranty

1 Expert Technical Staff


| Over 10 Years of Experience in Injection Molding
(Optimization / Foaming / Trial Injection)

2 Technical Research Team

| Control technology and mechanical design personnel
available for ongoing support

3 Auxiliary Facility Support

| Deployment of Skilled Technicians and Consulting Staff

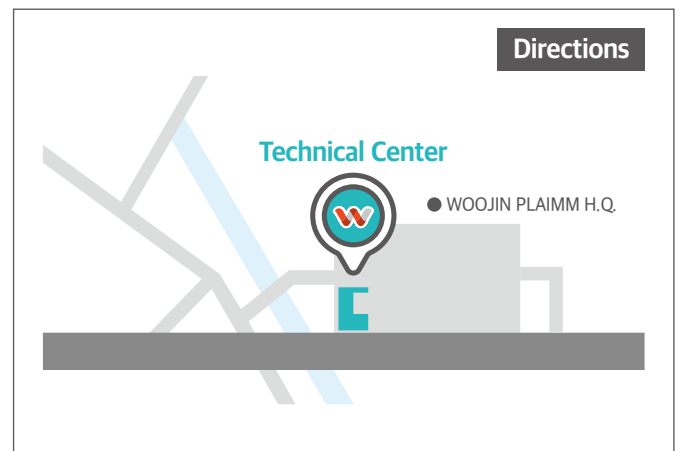

WOOJIN PLAIMM Technical Center **delivers the best results**
to our customers through **strategic consulting**
and **technical knowledge sharing.**



GLOBAL NETWORK



WOOJIN PLAIMM H.Q.

100, Woojinplaimm-ro, Jangan-myeon, Boeun-gun, Chungcheongbuk-do, Republic of Korea (28913)

Tel. +82 43-540-9000 Fax. +82 43-543-1420 E-mail. info@wjpim.com

SISTER COMPANIES

Austria Inc.	office@woojin.at	U.S.A Inc.	us@wjpim.com	Mexico Inc.	mx@wjpim.com	China Inc.	cn@wjpim.com
Vienna	T. +43-2256-20413	Chicago	T. +1-847-457-1916	Monterrey	T. +52-81-4452-0851	Ningbo	T. +86-574-8680-6088
		Atlanta	T. +1-224-500-5085	Queretaro	T. +52-81-1555-4286	Guangdong	T. +86-135-4938-2580
		Detroit	T. +1-334-332-8597	Tijuana	T. +52-81-1555-4224	Suzhou	T. +86-186-6787-5052

BRANCH OFFICE

Türkiye	office@woojin.at	Slovakia	sk@wjpim.com	Poland	ploffice@wjpim.com	Russia	ru@wjpim.com
Istanbul	T. +90-216-290-1483	Zilina	T. +421-903-207-420	Katowice	T. +48-513-211-177	Moscow	T. +7-495-245-0073
Thailand	th@wjpim.com	India	india1@wjpim.com	Malaysia	my@wjpim.com	Indonesia	id@wjpim.com
Bangkok	T. +66-2-745-4746	Chennai	T. +91-77081-80333	Kuala Lumpur	T. +60-3-7887-0590	Jakarta	T. +62-21-8370-1281
Chonburi	T. +66-33-138-848	Anantapur	T. +91-77081-54222	Johor Bahru	T. +60-7-2121-322	Cikarang	T. +62-21-8977-4613
Vietnam	vn@wjpim.com	Japan	jp@wjpim.com	Bangladesh	bd.arif@wjpim.com	Philippines	philippines2@wjpim.com
Bacninh	T. +84-22-2390-6797	Nagoya	T. +81-80-1249-1753	Dhaka	T. +880-19-2563-7935	Philippines	T. +63-49-542-5722
Hochiminh	T. +84-28-3772-0028						





HOME PAGE



YOUTUBE



CopyRight©2026, WOOJIN PLAIMM Co.,Ltd.

- ※ The copyright of this catalog belongs to WOOJIN PLAIMM Co., Ltd. Unauthorized use may result in legal liability under copyright law.
- ※ Product images and specifications are subject to change without prior notice for quality improvement.
- ※ Content updated as of January 2, 2026.

Korea No.1 IMM Manufacturer

WOOJIN PLAIMM Co., Ltd. | 100, Woojinplaimm-ro, Jangan-myeon, Boeun-gun, Chungcheongbuk-do, Republic of Korea
T. +82 43-540-9000 F. +82 43-543-1420 E. info@wjpim.com

