



L MOTOR CHANNEL – ORIGINAL PH/EN DRIVER

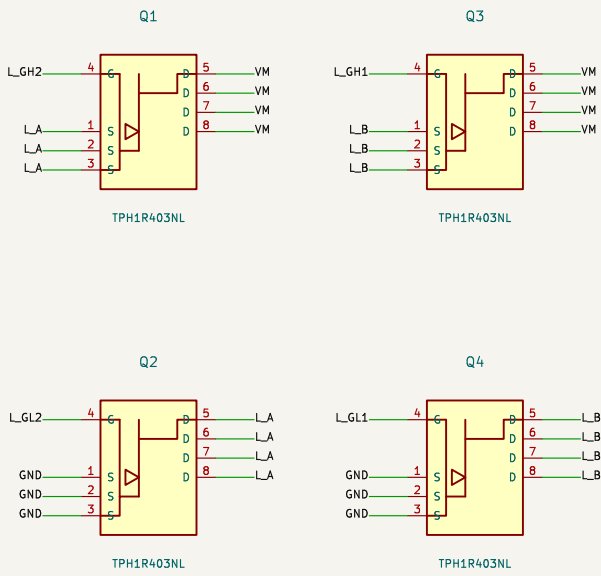

SOP Advance: S=1,2,3; G=4; D=5,6,7,8 + thermal pad

Original charge-pump and supply capacitors: all 100nF


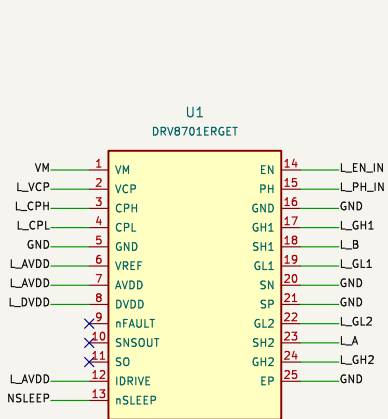


Series RC across motor outputs: 100nF + 100 ohm



12V motor: 0.4A rated / 1.8A stall max

R MOTOR CHANNEL – ORIGINAL PH/EN DRIVER

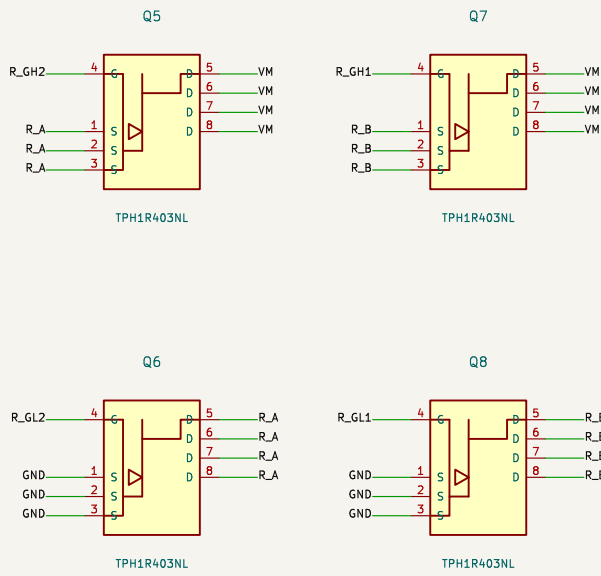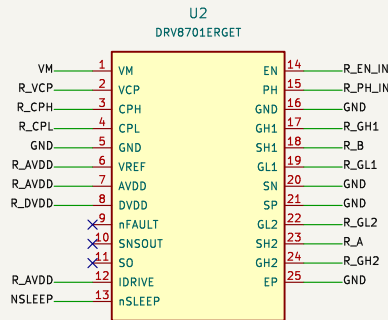

SOP Advance: S=1,2,3; G=4; D=5,6,7,8 + thermal pad

Original charge-pump and supply capacitors: all 100nF




Series RC across motor outputs: 100nF + 100 ohm



12V motor: 0.4A rated / 1.8A stall max

COMMON POWER, ENABLE AND ORIGINAL FOUR-SIGNAL INTERFACE

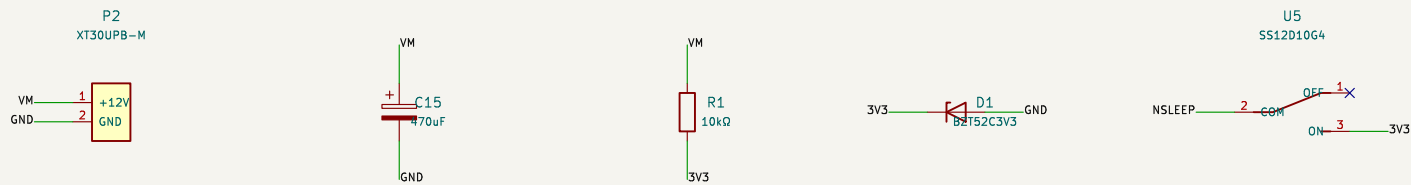

SOURCE-FAITHFUL DESIGN – values and connections intentionally retained; no hardware validation.
CN3 has no ground pin: controller must share ground via power return. 3V3 is a 10k-fed zener node.
VREF/IDRIIVE tied to AVDD; SP/SN grounded; nFAULT/SNSOUT/SO NC. No external current sensing or limit.
Original 100nF bypass values retained: compare TI recommendations before manufacture.

Original source values and net connections preserved
Manual PCB routing only; no hardware validation
Source: 8701 driver board, no current sensing 2.0

Sheet: /
File: DRV8701_DUAL_12V.kicad_sch

Title: DRV8701 DUAL MOTOR / 12 V

Size: A3
KiCad E.D.A. 9.0.2

Date: 2026-10-08

Rev: 1.0

Id: 1/1