Deployment architecture

Solid: required. Dashed: optional, compiles in CI, never run on hardware. Dotted: experiment apparatus, never run.

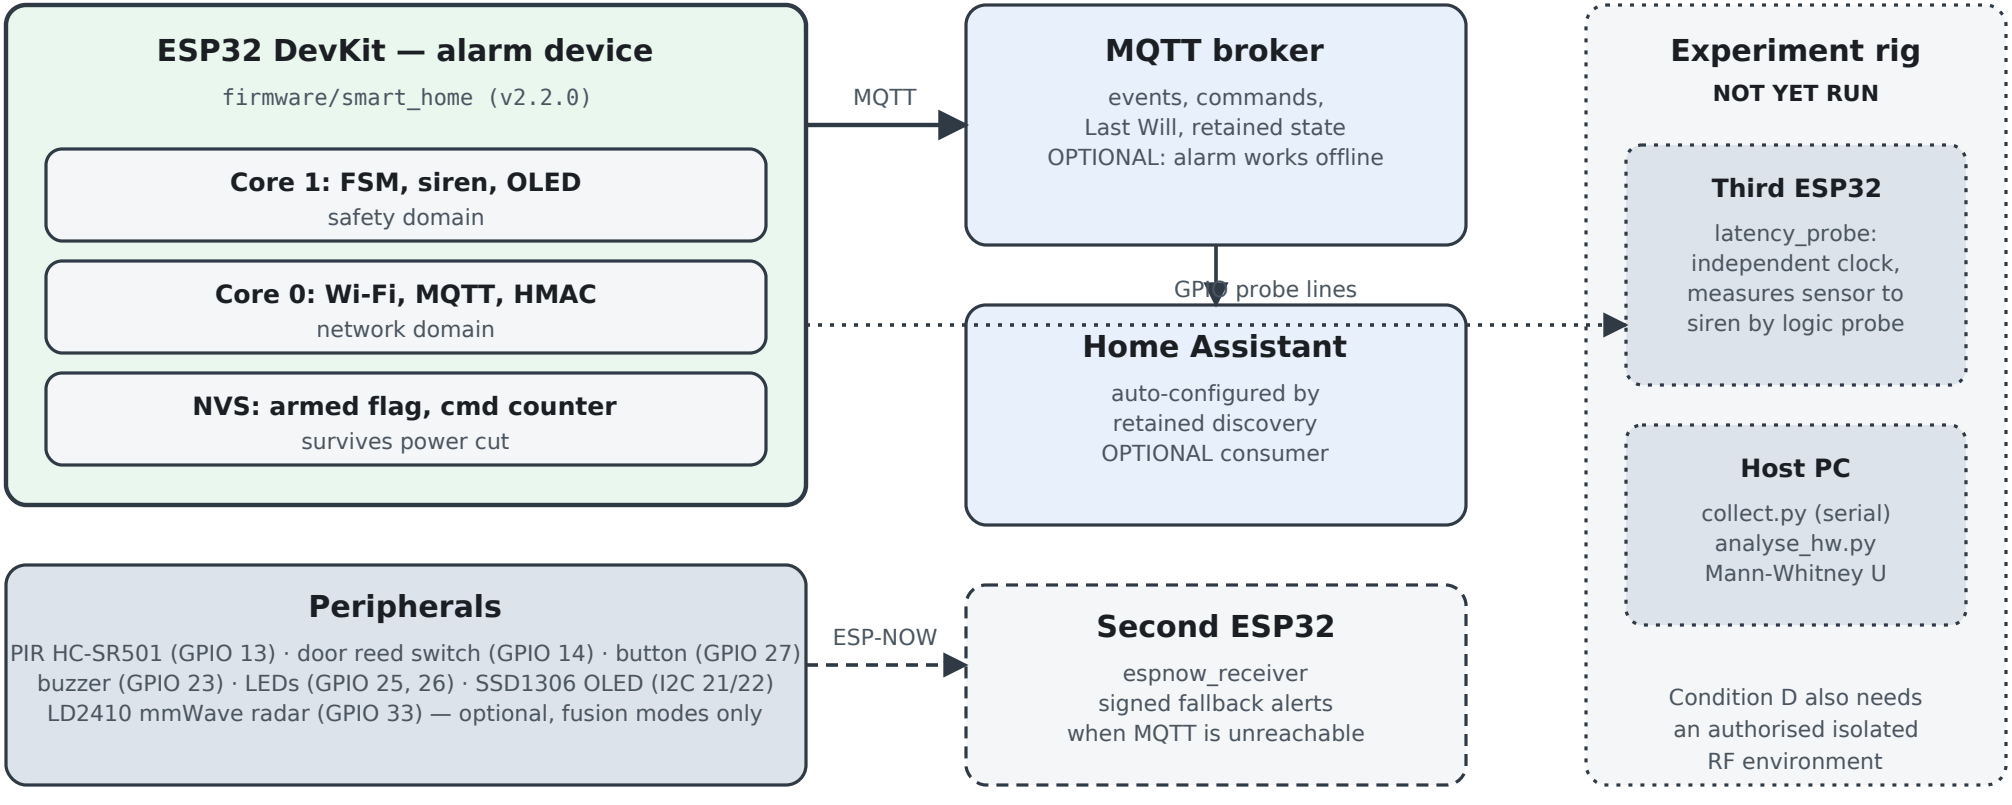

Software environment used for the committed results

Device: arduino-esp32 2.0.17 and 3.3.12 · Adafruit SSD1306, Adafruit GFX, PubSubClient
Host: Linux 6.18.44 · g++ 13 (C++17) · Python 3.13.16 · OpenJDK 21 (CI uses 17)
Verification: TLA+ tla2tools v1.8.0 (pinned) · AddressSanitizer + UndefinedBehaviorSanitizer
CI: ubuntu-24.04, 5 jobs, re-runs formal and adversarial checks on every push