Main backing plate

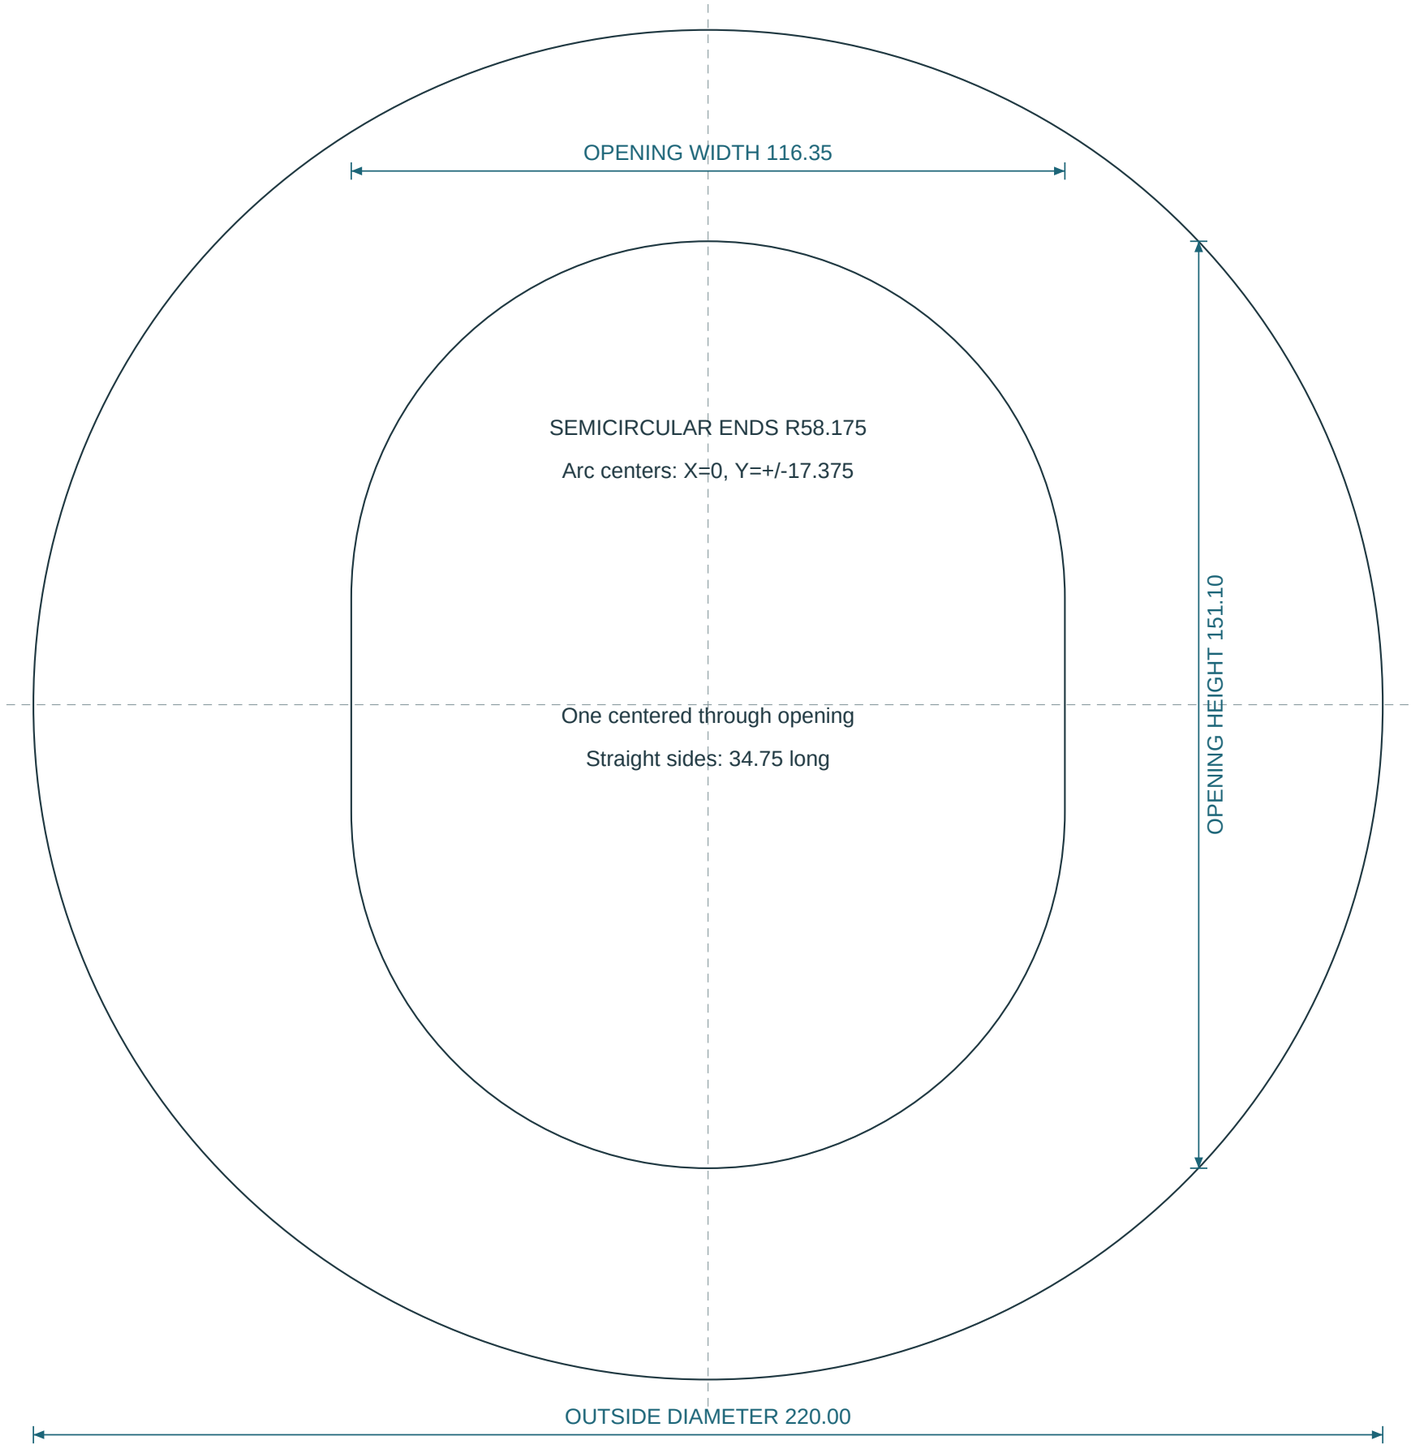

PART / QUANTITY

FT01_MAIN_220 | one per selected pair

GEOMETRY

Vertical capsule, 116.35 x 151.10, end R58.175. Aperture center equals outer-circle center.

THICKNESS OPTIONS

T1524 = 1.524 mm / 0.060 inch. First stainless quote; matching STL available for plastic. T3000 = 3.000 mm plastic/acrylic alternative. No silent material or thickness substitution.

MATERIAL / FINISH

Quote 316 stainless, deburred and directionally grained. Alternative 304 protected brushed stock. Protect visible face; align grain on the pair. Report actual finish and thickness.

REQUESTED SHOP TARGETS

Metal cut profile +/-0.13 mm; plastic +/-0.25 mm. Global free flatness target 0.50 mm. These are requests for vendor confirmation, not promised capabilities or accepted field tolerance.

EDGES

Smooth all edges, inside and outside, both faces. Remove cutting microtabs and sharp burrs. Do not change the contour to solve an installation conflict.

STATUS

Authorized design scope: quote and sacrificial dry-fit manufacture. No mounting tabs, threaded holes, bends or countersinks. Permanent installation is not released.

DATUM / FILES

Local origin at outer-circle center; rear face Z=0, front Z=thickness. X right, Y toward upper control. STEP controls solid thickness. DXF is 1:1 mm profile, no kerf compensation. STL units are mm by instruction.

Diverter backing ring

80 mm aperture is a fit-trial choice; factory rear footprint unverified

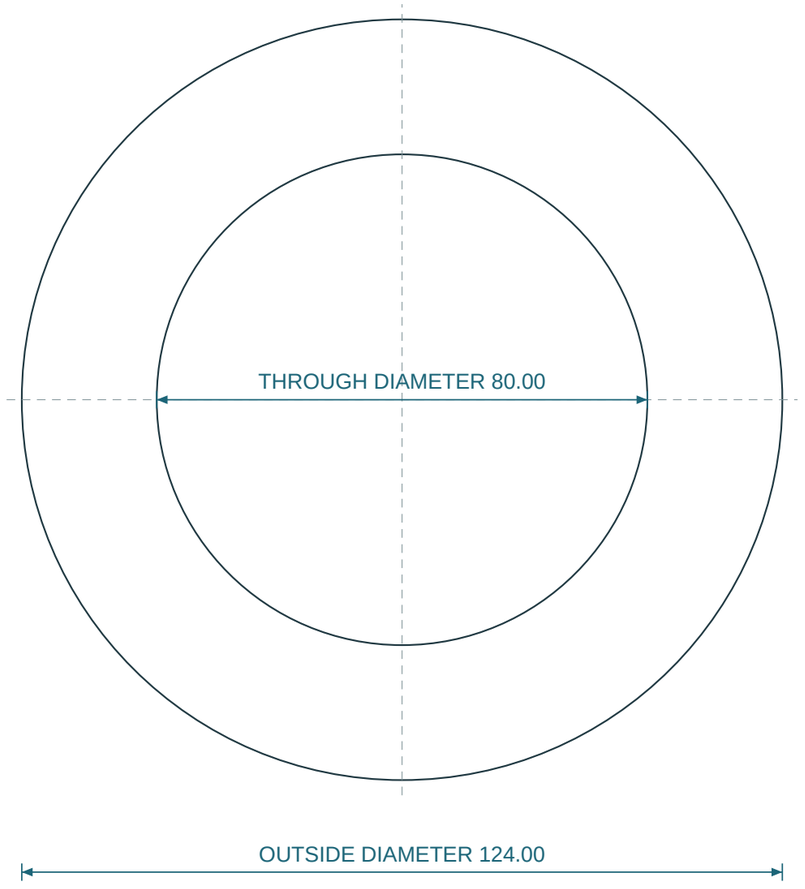

PART / QUANTITY

FT01_DIV_124 | one per selected pair

GEOMETRY

Concentric circular ring, outside 124.00, inside 80.00. Optional separate fallback outside 120.00, same inside 80.00. Order one size only.

THICKNESS OPTIONS

T1524 = 1.524 mm / 0.060 inch. First stainless quote; matching STL available for plastic. T3000 = 3.000 mm plastic/acrylic alternative. No silent material or thickness substitution.

MATERIAL / FINISH

Quote 316 stainless, deburred and directionally grained. Alternative 304 protected brushed stock. Protect visible face; align grain on the pair. Report actual finish and thickness.

REQUESTED SHOP TARGETS

Metal cut profile +/-0.13 mm; plastic +/-0.25 mm. Global free flatness target 0.50 mm. These are requests for vendor confirmation, not promised capabilities or accepted field tolerance.

EDGES

Smooth all edges, inside and outside, both faces. Remove cutting microtabs and sharp burrs. Do not change the contour to solve an installation conflict.

STATUS

Authorized design scope: quote and sacrificial dry-fit manufacture. No mounting tabs, threaded holes, bends or countersinks. Permanent installation is not released.

DATUM / FILES

Local origin at outer-circle center; rear face Z=0, front Z=thickness. X right, Y toward upper control. STEP controls solid thickness. DXF is 1:1 mm profile, no kerf compensation. STL units are mm by instruction.