
The two selected deep forms

PS01 / Owner selection / 17 October 2026 / Units: millimeters

Bring both primary designs. The owner wants the deeper relieved collar with the original face AND the same deeper collar with the reduced outer face for a smaller printer bed. The separate short 12 mm model is optional only.

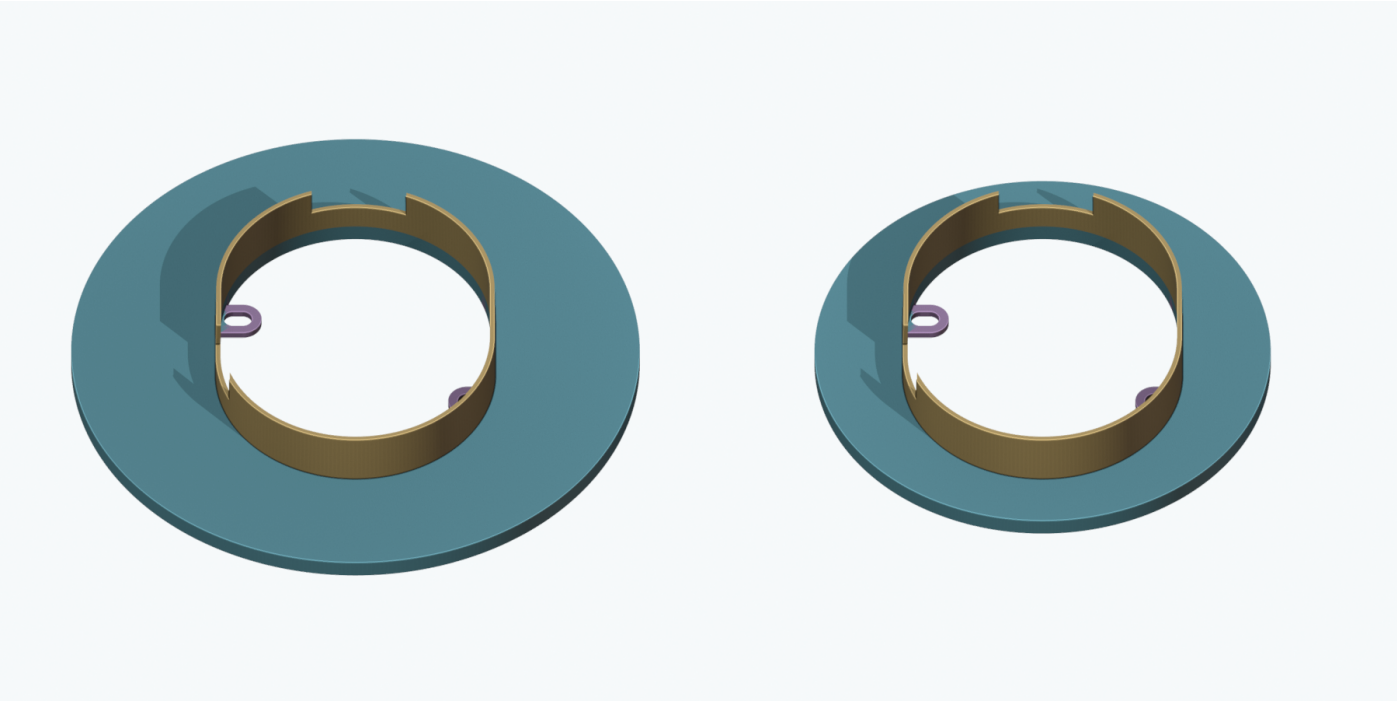

Left: primary original, 240 mm face. **Right:** primary smaller face, 192.55 mm. Actual CAD, same scale; colors explain features, not different print materials.

Primary designs	Original RF03	Small RF04
Overall size	240 x 240 x 32 mm	192.55 x 192.55 x 32 mm
Maximum collar depth	24 mm, relieved	24 mm, relieved
Usable bed with 5 mm brim	250 x 250 mm minimum	203 x 203 mm minimum
Minimum face width outside collar	47.45 mm	23.725 mm (half)

What the 12 mm number means

Both selected deep forms keep an uninterrupted front 12 mm molding band. The collar extends to 24 mm where the rear clearance reliefs permit it. This **does not make them the short D12 model**. Overall print height is 32 mm: 8 mm face plus 24 mm maximum collar.

Use these filenames

01_PRIMARY_ORIGINAL_DEEP_240
PRIMARY_ORIGINAL_240_D24_RELIEVED_mm.3mf
02_PRIMARY_SMALL_DEEP_192_55
PRIMARY_SMALL_192_55_D24_RELIEVED_mm.3mf

Use the same-name STL if preferred. STEP is editable CAD. These are alternative formats of each part, not three parts to print. Names are clarified copies; geometry bytes match the checked RF03/RF04 originals.

Print and use the selected forms

Setting	Starting point
Material / scale	Unfilled PETG, known printer/filament profile, 100% scale.
Orientation	Flat front face and tabs on the bed; collar grows upward. Files are pre-oriented.
Nozzle / layer	0.4 mm / 0.2 mm
Walls / skins / infill	5 walls / 1.2 mm top and bottom / 25% gyroid or cubic
Brim / support / raft	5 mm / supports off after inspecting layers / raft off

At the printer


Confirm the selected dimensions in the slicer. Use actual clear bed area after clips and exclusion zones. Do not shrink either model to fit. Both deeper files are supplied; agree physical print quantities with the owner. Do not substitute the short version automatically. Geometry-only 3MF contains no machine settings; no G-code is supplied.

Locate, brace and rehearse

Remove rod-end nuts for insertion. The 12 x 8 mm slots give coarse alignment and play. Support the face with independent padded bracing; do not load the 3 mm tabs or pull a warped face flat with the nuts. Rehearse seating and withdrawal on the actual hardware before any repair.

The smaller face guides less surrounding repair area. Use sound tile and a straightedge or additional temporary form beyond its edge. Keep rear repair in the continuous front 12 mm molding zone; protect the central service opening and do not encase valve parts. Remove all formwork, release film and pads after suitable cure. These are temporary tools, not final escutcheons or waterproof liners.

Optional extra: the short 12 mm form



03_OPTIONAL_SHORT_12MM
OPTIONAL_SHORT_240_D12_mm.3mf
Same-name STL and STEP included.

240 x 240 x 20 mm overall.
12 mm continuous collar; no rear reliefs.
250 x 250 mm usable bed with brim.
Included only as a backup.

Physical fit, full-face support, print strength and repair suitability remain to be checked. Earlier RF03 files calling D12 the default or D24 optional are preserved history; this PS01 selection governs this handoff.